








 510 pag. 80	 520 pag. 81	 520 FG pag. 82	 520 GT pag. 83	 520 LBP pag. 84	 520 pag. 85
 521 pag. 86	 525 pag. 87	 530 pag. 88	 530 GT pag. 89	 530 GT SI pag. 90	 530 pag. 91
 550 pag. 92	 550 GT pag. 93	 550 GT SI pag. 94	 550 pag. 95	 550 FTT pag. 96	 550 FG pag. 97
 551 pag. 98	 551 GT pag. 99	 551 GT SI pag. 100	 551 LBP pag. 101	 600 pag. 102	 500 RR pag. 103
 260 M pag. 104	 260 M FG pag. 105	 260 TAB pag. 106	 261 M pag. 106		

510FT


Tappeto Modulare
Modular Belt
Modulare Mattenkette

Imperial
Sizes

Tappeto Modulare 510 FT, H=6 M=3" / Modular Belt Series 510 FT, H=6 M=3" / Modulare Mattenkette 510 FT, H=6 M=3"


VERSION A - STANDARD

CODE STRUCTURE GUIDE			
5331	01	0012	A
Series	Material	Width	Version

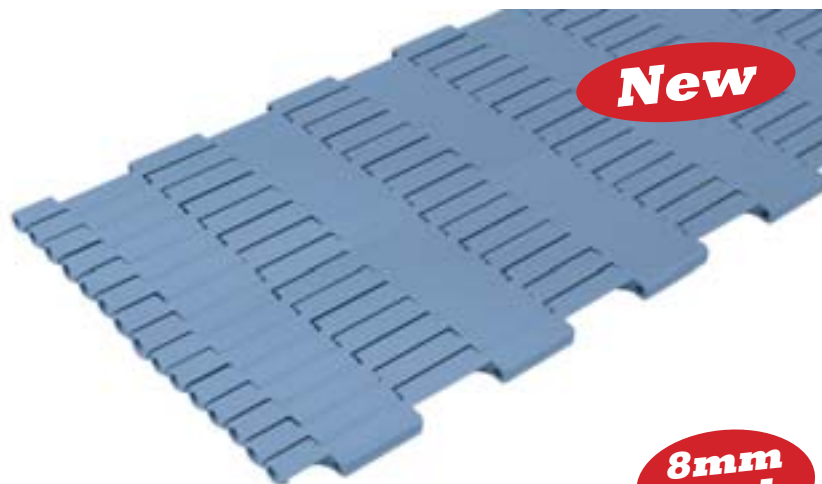

New

8mm
pitch

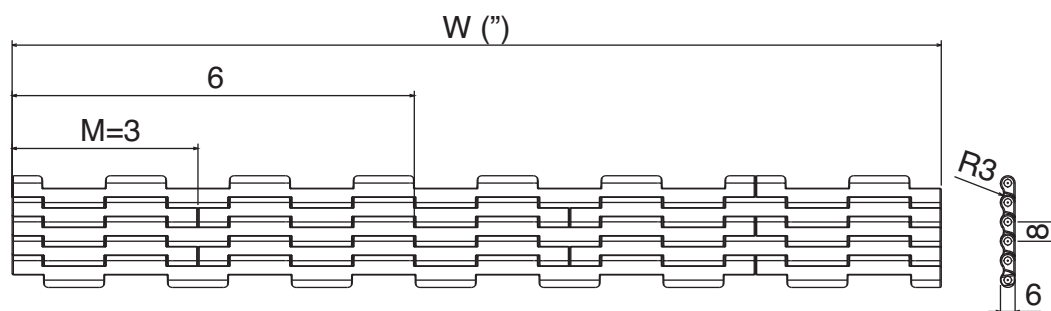

* Material

01 LFA - Acetal Resin



Max working load: 3000 N/m
Weight: 5.8 kg/m²
Temperature range:
dry -40÷80 °C
wet -40÷65 °C
Pin material: PBT white

03 MX - PBT



Max working load: 2700 N/m
Weight: 5.5 kg/m²
Temperature range:
dry -40÷120 °C
wet -40÷60 °C
Pin material: POM grey


08 MK

Super Performance Acetal



Max working load: 2900 N/m
Weight: 5.8 kg/m²
Temperature range:
dry -40÷80 °C
wet -40÷65 °C
Pin material: PBT white

On request also available in
other materials and widths

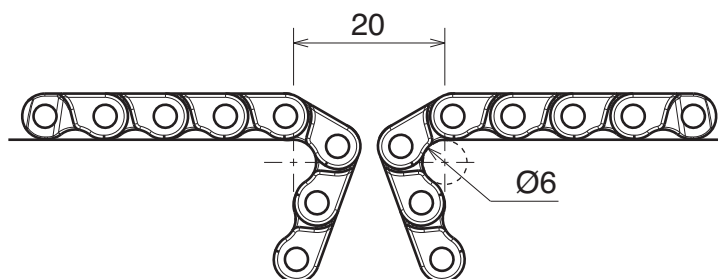

Series	Material	Width	Version
5331	*	0003	A
5331	*	0006	A
5331	*	0009	A
5331	*	0012	A
5331	*	0015	A
5331	*	0018	A
5331	*	0021	A

Series	Material	Width	Version
5331	*	0024	A
5331	*	0027	A
5331	*	0030	A
5331	*	0033	A
5331	*	0036	A
5331	*	0039	A



pg 108

Materiale:	Material:	Materialien:
UHMW-PE	UHMW-PE	UHMW-PE

Used with belt series
520-521-525-530



Piatto di trasferimento / Transfer Plate / Überschubplatte

Part	Article-Nr.	L	Type
228	22801	85	A
228	22802	170	A
228	22803	255	A
228	22804	85	B
228	22805	170	B
228	22806	255	B





Also available, on request, other widths



TYPE A

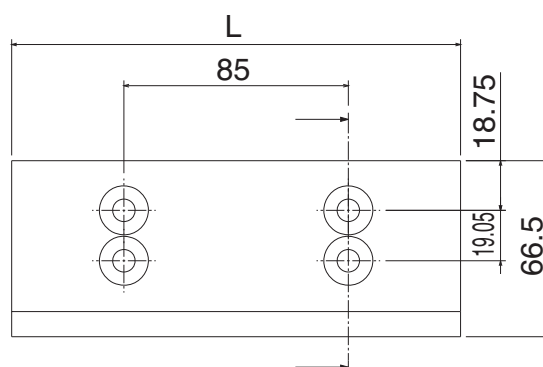

TYPE B - WITH ROLLER BEARING

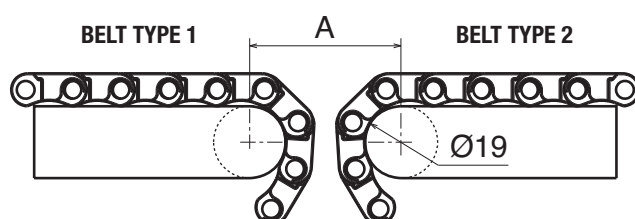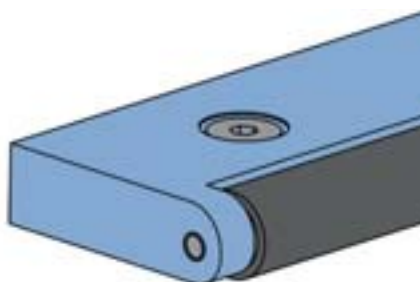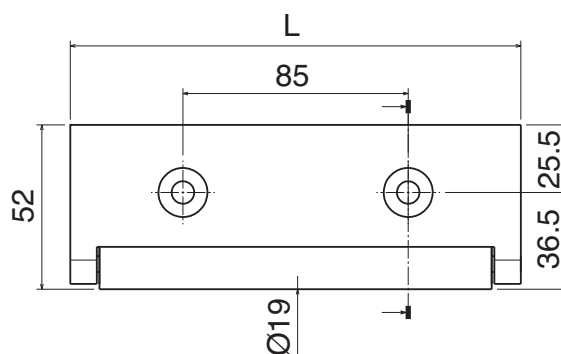

Belt type 1	Belt type 2	A
FT / FG	FT / FG	40
FT / FG	GT	42
FT / FG	LBP	53
GT	GT	44
GT	LBP	55
LBP	LBP	65


Tappeto Modulare 520 FT, H=8,7 M=85 / Modular Belt Series 520 FT, H=8,7 M=85 / Modulare Mattenkette 520 FT, H=8,7 M=85

Series	Material	Width	Version
5201	*	0085	A
5201	*	0170	A
5201	*	0255	A
5201	*	0340	A
5201	*	0425	A
5201	*	0510	A
5201	*	0595	A
5201	*	0680	A
5201	*	0765	A


Series	Material	Width	Version
5201	*	0850	A
5201	*	0935	A
5201	*	1020	A
5201	*	1105	A
5201	*	1190	A
5201	*	1275	A
5201	*	1360	A
5201	*	1445	A
5201	*	1530	A

CODE STRUCTURE GUIDE

5201	03	0340	C
Series	Material	Width	Version

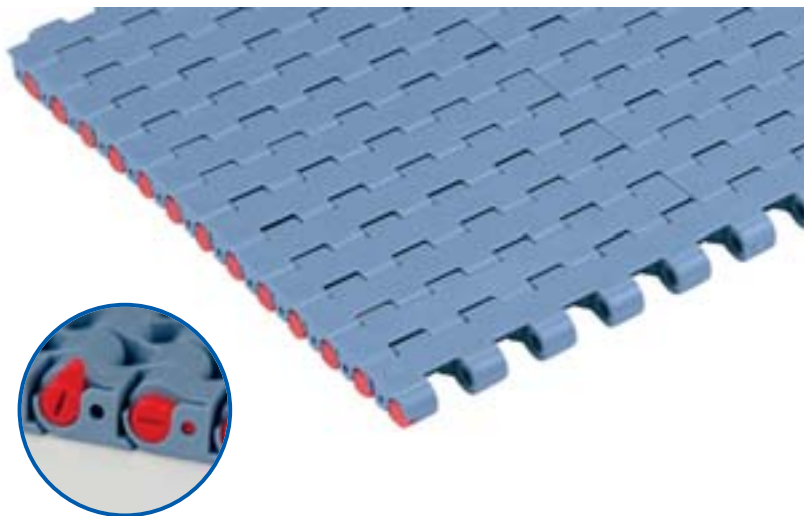

VERSION A - STANDARD

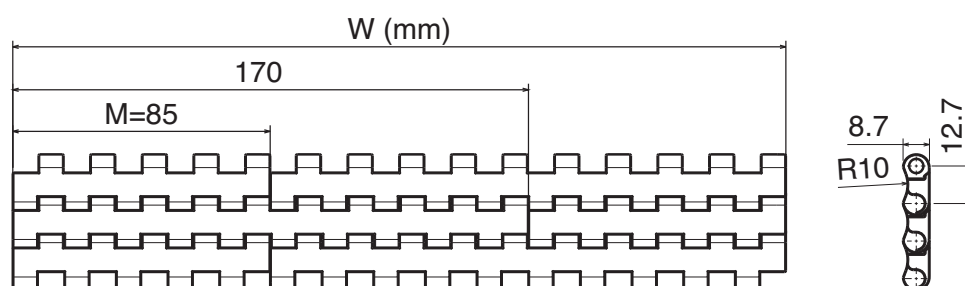

* Material

01 LFA - Acetal Resin



Max working load: 21500 N/m
 Weight: 7,8 kg/m²
 Temperature range:
 dry -40÷80 °C
 wet -40÷65 °C
 Pin material: PBT white

03 MX - PBT



Max working load: 17500 N/m
 Weight: 7,5 kg/m²
 Temperature range:
 dry -40÷120 °C
 wet -40÷60 °C
 Pin material: POM grey

08 MK


Super Performance Acetal




Max working load: 20700 N/m
 Weight: 7,8 kg/m²
 Temperature range:
 dry -40÷80 °C
 wet -40÷65 °C
 Pin material: PBT white

On request also available in
 other materials and widths

VERSION B - WITH 1 POSITIONER



VERSION C - WITH 2 POSITIONERS

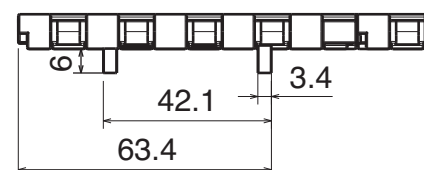

Series	Material	Width	Version
5201	*	0085	B
5201	*	0170	B
5201	*	0255	B
5201	*	0340	B
5201	*	0425	B
5201	*	0510	B
5201	*	0595	B
5201	*	0680	B
5201	*	0765	B

Series	Material	Width	Version
5201	*	0850	B
5201	*	0935	B
5201	*	1020	B
5201	*	1105	B
5201	*	1190	B
5201	*	1275	B
5201	*	1360	B
5201	*	1445	B
5201	*	1530	B

Series	Material	Width	Version
5201	*	0085	C
5201	*	0170	C
5201	*	0255	C
5201	*	0340	C
5201	*	0425	C
5201	*	0510	C
5201	*	0595	C
5201	*	0680	C
5201	*	0765	C

Series	Material	Width	Version
5201	*	0850	C
5201	*	0935	C
5201	*	1020	C
5201	*	1105	C
5201	*	1190	C
5201	*	1275	C
5201	*	1360	C
5201	*	1445	C
5201	*	1530	C



pg 110-111

**Metric
Sizes**


Tappeto Modulare 520 FG, H=8,7 M=85 / Modular Belt Series 520 FG, H=8,7 M=85 / Modulare Mattenkette 520 FG, H=8,7 M=85

Series	Material	Width	Version
5202	*	0085	A
5202	*	0170	A
5202	*	0255	A
5202	*	0340	A
5202	*	0425	A
5202	*	0510	A
5202	*	0595	A
5202	*	0680	A
5202	*	0765	A

Series	Material	Width	Version
5202	*	0850	A
5202	*	0935	A
5202	*	1020	A
5202	*	1105	A
5202	*	1190	A
5202	*	1275	A
5202	*	1360	A
5202	*	1445	A
5202	*	1530	A




CODE STRUCTURE GUIDE			
5202	01	0765	A
Series	Material	Width	Version

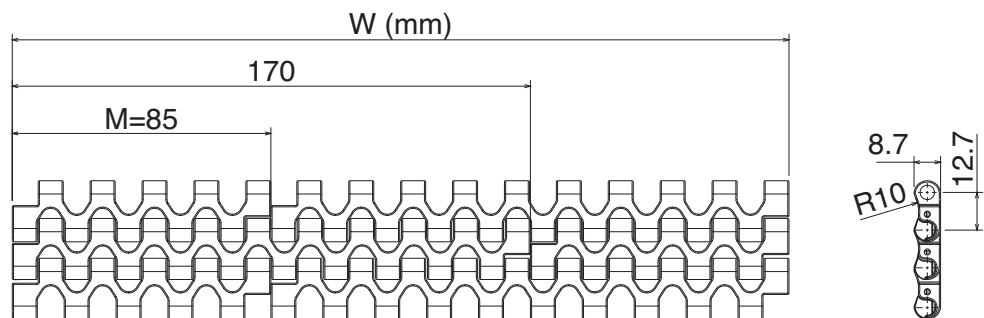VERSION A - STANDARD

*** Material**
01 LFA - Acetal Resin


Max working load: 21500 N/m
Weight: 7,5 kg/m²
Temperature range:
dry -40÷80 °C
wet -40÷65 °C
Pin material: PBT white



03 MX - PBT


Max working load: 17500 N/m
Weight: 7,2 kg/m²
Temperature range:
dry -40÷120 °C
wet -40÷60 °C
Pin material: POM grey

08 MK
Super Performance Acetal


Max working load: 20700 N/m
Weight: 7,5 kg/m²
Temperature range:
dry -40÷80 °C
wet -40÷65 °C
Pin material: PBT white

On request also available in
other materials and widths

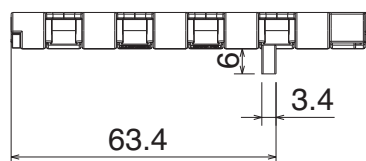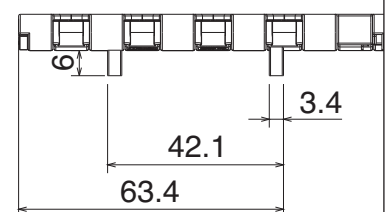VERSION B - WITH 1 POSITIONER

VERSION C - WITH 2 POSITIONERS


Series	Material	Width	Version
5202	*	0085	B
5202	*	0170	B
5202	*	0255	B
5202	*	0340	B
5202	*	0425	B
5202	*	0510	B
5202	*	0595	B
5202	*	0680	B
5202	*	0765	B

Series	Material	Width	Version
5202	*	0850	B
5202	*	0935	B
5202	*	1020	B
5202	*	1105	B
5202	*	1190	B
5202	*	1275	B
5202	*	1360	B
5202	*	1445	B
5202	*	1530	B

Series	Material	Width	Version
5202	*	0085	C
5202	*	0170	C
5202	*	0255	C
5202	*	0340	C
5202	*	0425	C
5202	*	0510	C
5202	*	0595	C
5202	*	0680	C
5202	*	0765	C

Series	Material	Width	Version
5202	*	0850	C
5202	*	0935	C
5202	*	1020	C
5202	*	1105	C
5202	*	1190	C
5202	*	1275	C
5202	*	1360	C
5202	*	1445	C
5202	*	1530	C




pg 110-111

Tappeto Modulare 520 GT, H=8,7 M=85 / Modular Belt Series 520 GT, H=8,7 M=85 / Modulare Mattenkette 520 GT, H=8,7 M=85



Series	Material	Width	Version
5203	*	0085	A
5203	*	0170	A
5203	*	0255	A
5203	*	0340	A
5203	*	0425	A
5203	*	0510	A
5203	*	0595	A
5203	*	0680	A
5203	*	0765	A

Series	Material	Width	Version
5203	*	0850	A
5203	*	0935	A
5203	*	1020	A
5203	*	1105	A
5203	*	1190	A
5203	*	1275	A
5203	*	1360	A
5203	*	1445	A
5203	*	1530	A

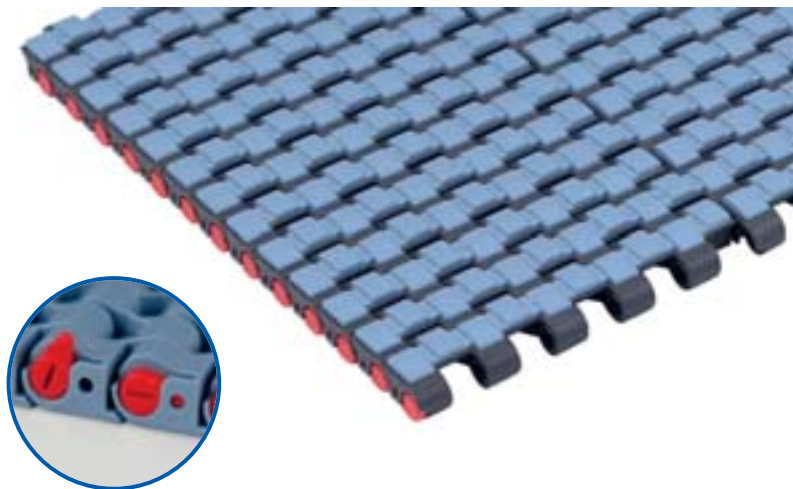

CODE STRUCTURE GUIDE			
5203	02	0510	B
Series	Material	Width	Version

VERSION A - STANDARD

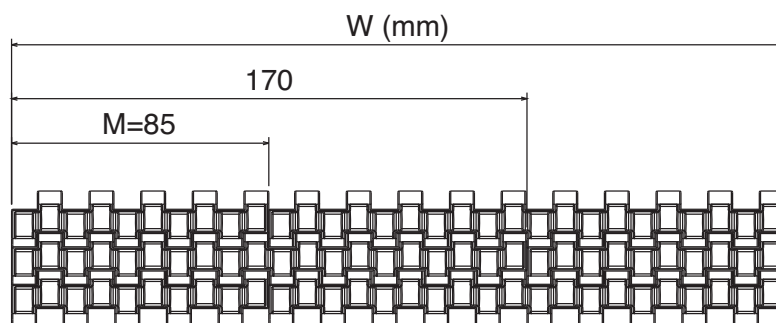

* Material

01 LFA - Acetal Resin



Max working load: 21500 N/m
 Weight: 9,0 kg/m²
 Temp. range: dry -40÷80 °C
 wet -40÷65 °C
 Pin material: PBT white
 Hardness: 75 ShA

02 PP - Polypropylene



Max working load: 13000 N/m
 Weight: 7,5 kg/m²
 Temp. range: dry 4÷80 °C
 wet 4÷65 °C
 Pin material: PP blu
 Hardness: 75 ShA


03 MX - PBT




Max working load: 17500 N/m
 Weight: 9,3 kg/m²
 Temp. range: dry -40÷120 °C
 wet -40÷60 °C
 Pin material: POM grey
 Hardness: 75 ShA

On request also available in
 other materials and widths

VERSION B - WITH 1 POSITIONER



VERSION C - WITH 2 POSITIONERS



Series	Material	Width	Version
5203	*	0085	B
5203	*	0170	B
5203	*	0255	B
5203	*	0340	B
5203	*	0425	B
5203	*	0510	B
5203	*	0595	B
5203	*	0680	B
5203	*	0765	B

Series	Material	Width	Version
5203	*	0850	B
5203	*	0935	B
5203	*	1020	B
5203	*	1105	B
5203	*	1190	B
5203	*	1275	B
5203	*	1360	B
5203	*	1445	B
5203	*	1530	B

Series	Material	Width	Version
5203	*	0085	C
5203	*	0170	C
5203	*	0255	C
5203	*	0340	C
5203	*	0425	C
5203	*	0510	C
5203	*	0595	C
5203	*	0680	C
5203	*	0765	C

Series	Material	Width	Version
5203	*	0850	C
5203	*	0935	C
5203	*	1020	C
5203	*	1105	C
5203	*	1190	C
5203	*	1275	C
5203	*	1360	C
5203	*	1445	C
5203	*	1530	C




pg 110-111

Metric
Sizes

Tappeto Modulare 520 LBP, H=8,7 M=85 / Modular Belt Series 520 LBP, H=8,7 M=85 / Modulare Mattenkette 520 LBP, H=8,7 M=85


Series	Material	Width	Version
5204	*	0085	A
5204	*	0170	A
5204	*	0255	A
5204	*	0340	A
5204	*	0425	A
5204	*	0510	A
5204	*	0595	A
5204	*	0680	A
5204	*	0765	A

Series	Material	Width	Version
5204	*	0850	A
5204	*	0935	A
5204	*	1020	A
5204	*	1105	A
5204	*	1190	A
5204	*	1275	A
5204	*	1360	A
5204	*	1445	A
5204	*	1530	A

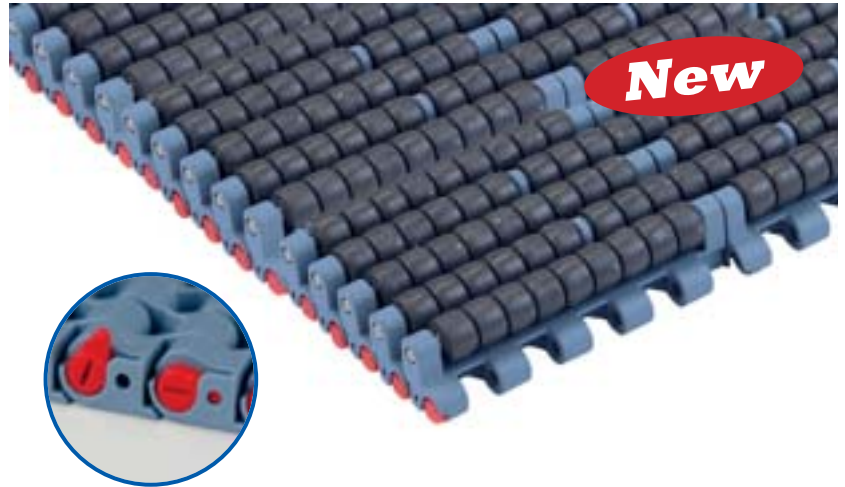

CODE STRUCTURE GUIDE			
5204	01	1530	C
Series	Material	Width	Version

VERSION A - STANDARD

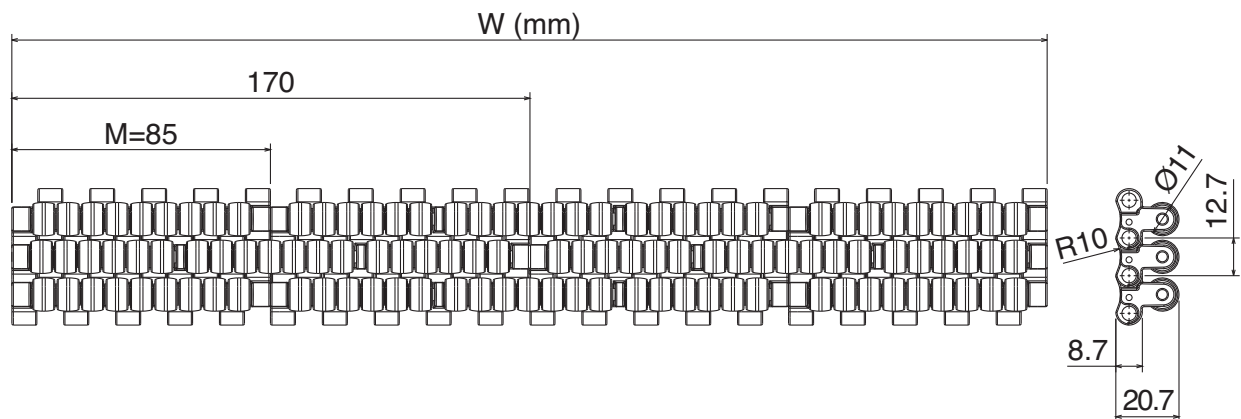

* Material

01 LFA - Acetal Resin



Max working load: 21500 N/m

Weight: 24,0 kg/m²

Temperature range:


dry -40÷80 °C

wet 1÷65 °C


Pin material: PBT white

On request also available in
other materials and widths

VERSION B - WITH 1 POSITIONER



VERSION C - WITH 2 POSITIONERS

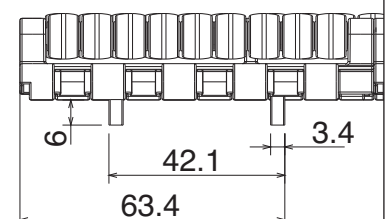

Series	Material	Width	Version
5204	*	0085	B
5204	*	0170	B
5204	*	0255	B
5204	*	0340	B
5204	*	0425	B
5204	*	0510	B
5204	*	0595	B
5204	*	0680	B
5204	*	0765	B

Series	Material	Width	Version
5204	*	0850	B
5204	*	0935	B
5204	*	1020	B
5204	*	1105	B
5204	*	1190	B
5204	*	1275	B
5204	*	1360	B
5204	*	1445	B
5204	*	1530	B

Series	Material	Width	Version
5204	*	0085	C
5204	*	0170	C
5204	*	0255	C
5204	*	0340	C
5204	*	0425	C
5204	*	0510	C
5204	*	0595	C
5204	*	0680	C
5204	*	0765	C

Series	Material	Width	Version
5204	*	0850	C
5204	*	0935	C
5204	*	1020	C
5204	*	1105	C
5204	*	1190	C
5204	*	1275	C
5204	*	1360	C
5204	*	1445	C
5204	*	1530	C



pg 110-111


Tappeto Modulare 521 FT, H=8,7 M=7,5" / Modular Belt Series 521 FT, H=8,7 M=7,5" / Modulare Mattenkette 521 FT, H=8,7 M=7,5"

Series	Material	Width	Version
5311	*	9750	A

CODE STRUCTURE GUIDE			
5311	01	9750	C
Series	Material	Width	Version



VERSION A - STANDARD

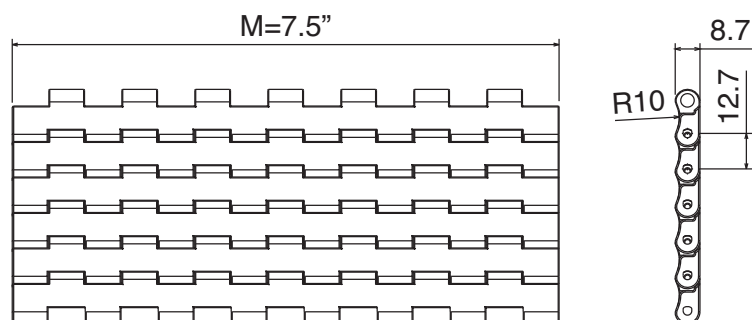

* Material

01 LFA - Acetal Resin

Max working load: 21500 N/m
 Weight: 8,0 kg/m²
 Temperature range:
 dry -40÷80 °C
 wet -40÷65 °C
 Pin material: PBT white

03 MX - PBT


Max working load: 17500 N/m
 Weight: 7,8 kg/m²
 Temperature range:
 dry -40÷120 °C
 wet -40÷60 °C
 Pin material: POM grey

08 MK**Super Performance Acetal**

Max working load: 20700 N/m
 Weight: 8,0 kg/m²
 Temperature range:
 dry -40÷80 °C
 wet -40÷65 °C
 Pin material: PBT white

On request also available
 in other materials

VERSION C - WITH 2 POSITIONERS



Series	Material	Width	Version
5311	*	9750	C



pg 109

Imperial
Sizes

Tappeto Modulare 590 FT, H=8,7 M=3" / Modular Belt Series 590 FT, H=8,7 M=3" / Modulare Mattenkette 590 FT, H=8,7 M=3"


Series	Material	Width	Version
5301	*	0003	A
5301	*	0006	A
5301	*	0009	A
5301	*	0012	A
5301	*	0015	A
5301	*	0018	A
5301	*	0021	A
5301	*	0024	A
5301	*	0027	A

Series	Material	Width	Version
5301	*	0030	A
5301	*	0033	A
5301	*	0036	A
5301	*	0039	A
5301	*	0042	A
5301	*	0045	A
5301	*	0048	A
5301	*	0051	A
5301	*	0054	A

CODE STRUCTURE GUIDE

5301	01	0009	C
Series	Material	Width	Version

VERSION A - STANDARD

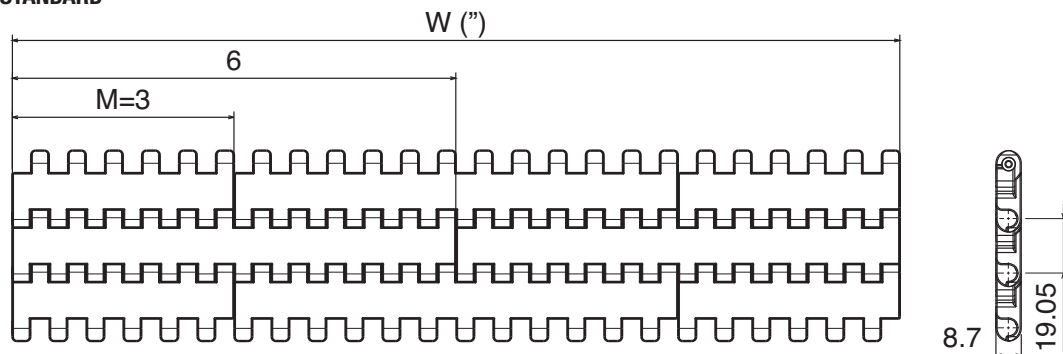

* Material

01 LFA - Acetal Resin

Max working load: 30000 N/m
 Weight: 7,2 kg/m²
 Temperature range:
 dry -40÷80 °C
 wet -40÷65 °C
 Pin material: PBT white

03 MX - PBT

Max working load: 24000 N/m
 Weight: 7,0 kg/m²
 Temperature range:
 dry -40÷120 °C
 wet -40÷60 °C
 Pin material: POM grey

08 MK

Super Performance Acetal


Max working load: 28800 N/m
 Weight: 7,2 kg/m²
 Temperature range:
 dry -40÷80 °C
 wet -40÷65 °C
 Pin material: PBT white

On request also available in
 other materials and widths



pg 113

VERSION C - WITH 2 POSITIONER

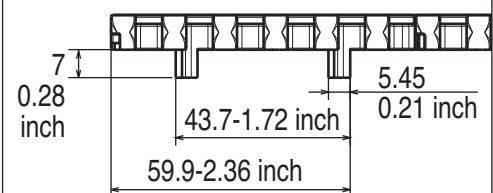


Series	Material	Width	Version
5301	*	0003	C
5301	*	0006	C
5301	*	0009	C
5301	*	0012	C
5301	*	0015	C
5301	*	0018	C
5301	*	0021	C
5301	*	0024	C
5301	*	0027	C

Series	Material	Width	Version
5301	*	0030	C
5301	*	0033	C
5301	*	0036	C
5301	*	0039	C
5301	*	0042	C
5301	*	0045	C
5301	*	0048	C
5301	*	0051	C
5301	*	0054	C

Tappeto Modulare 525 FT, H=8,7 M=85 / Modular Belt Series 525 FT, H=8,7 M=85 / Modulare Mattenkette 525 FT, H=8,7 M=85


Series	Material	Width	Version
5251	*	0085	A
5251	*	0170	A
5251	*	0255	A
5251	*	0340	A
5251	*	0425	A
5251	*	0510	A
5251	*	0595	A
5251	*	0680	A
5251	*	0765	A

Series	Material	Width	Version
5251	*	0850	A
5251	*	0935	A
5251	*	1020	A
5251	*	1105	A
5251	*	1190	A
5251	*	1275	A
5251	*	1360	A
5251	*	1445	A
5251	*	1530	A

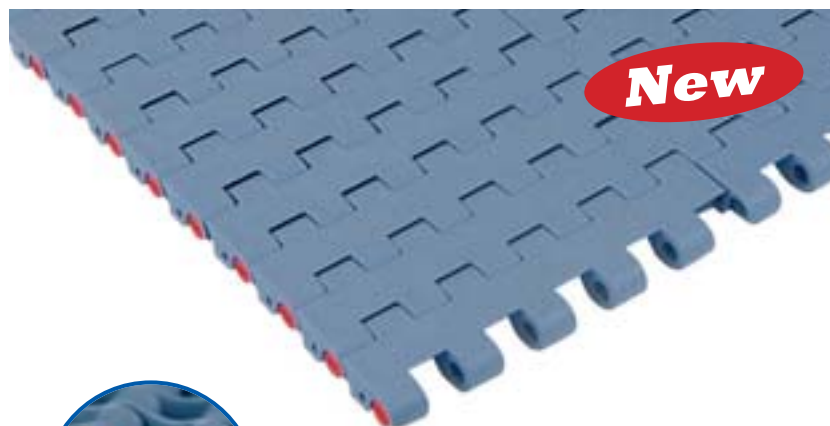

VERSION A - STANDARD

CODE STRUCTURE GUIDE			
5251	03	0340	C
Series	Material	Width	Version

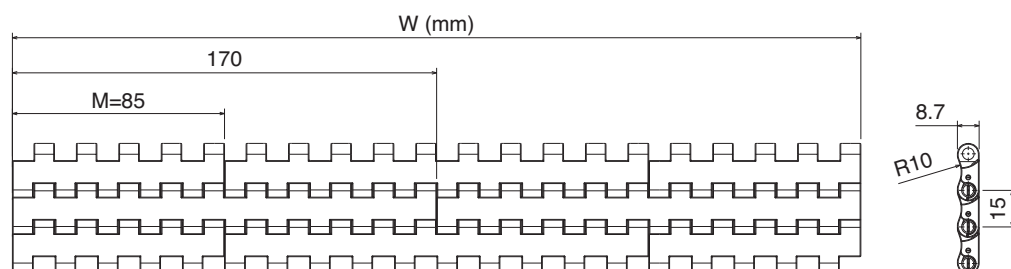

* Material

01 LFA - Acetal Resin



Max w. load: 21500 N/m
Weight: 7,8 kg/m²
Temperature range:

dry -40÷80 °C
wet -40÷65 °C

Pin material: PBT white

03 MX - PBT



Max w. load: 17500 N/m
Weight: 7,5 kg/m²
Temperature range:

dry -40÷120 °C
wet -40÷60 °C

Pin material: PBT white

08 MK

Super Performance Acetal




Max w. load: 20700 N/m
Weight: 7,8 kg/m²
Temperature range:

dry -40÷80 °C
wet -40÷65 °C


Pin material: PBT white

On request also available in
other materials and widths

VERSION B - WITH 1 POSITIONER



VERSION C - WITH 2 POSITIONERS

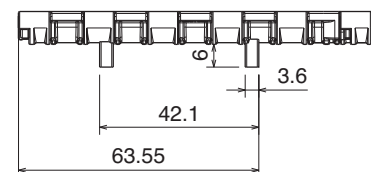

Series	Material	Width	Version
5251	*	0085	B
5251	*	0170	B
5251	*	0255	B
5251	*	0340	B
5251	*	0425	B
5251	*	0510	B
5251	*	0595	B
5251	*	0680	B
5251	*	0765	B

Series	Material	Width	Version
5251	*	0850	B
5251	*	0935	B
5251	*	1020	B
5251	*	1105	B
5251	*	1190	B
5251	*	1275	B
5251	*	1360	B
5251	*	1445	B
5251	*	1530	B

Series	Material	Width	Version
5251	*	0085	C
5251	*	0170	C
5251	*	0255	C
5251	*	0340	C
5251	*	0425	C
5251	*	0510	C
5251	*	0595	C
5251	*	0680	C
5251	*	0765	C

Series	Material	Width	Version
5251	*	0850	C
5251	*	0935	C
5251	*	1020	C
5251	*	1105	C
5251	*	1190	C
5251	*	1275	C
5251	*	1360	C
5251	*	1445	C
5251	*	1530	C




pg 112

Metric
Sizes

Tappeto Modulare 525 GT, H=8,7 M=85 / Modular Belt Series 525 GT, H=8,7 M=85 / Modulare Mattenkette 525 GT, H=8,7 M=85

Series	Material	Width	Version
5253	*	0085	A
5253	*	0170	A
5253	*	0255	A
5253	*	0340	A
5253	*	0425	A
5253	*	0510	A
5253	*	0595	A
5253	*	0680	A
5253	*	0765	A


Series	Material	Width	Version
5253	*	0850	A
5253	*	0935	A
5253	*	1020	A
5253	*	1105	A
5253	*	1190	A
5253	*	1275	A
5253	*	1360	A
5253	*	1445	A
5253	*	1530	A

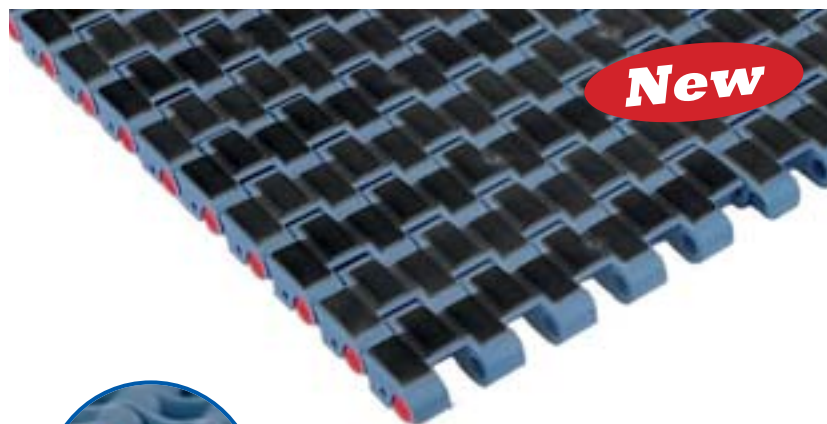

VERSION A - STANDARD

CODE STRUCTURE GUIDE

5253	01	0765	A
Series	Material	Width	Version

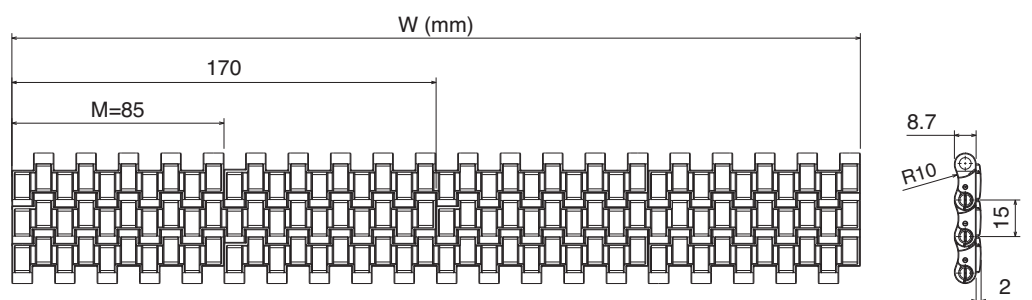

* Material

01 LFA - Acetal Resin



Max w. load: 21500 N/m
 Weight: 7,8 kg/m²
 Temp. range: dry -40÷80 °C
 wet -40÷65 °C
 Pin material: PBT white
 Hardness: 75 ShA

02 PP - Polypropylene





Max w. load: 13000 N/m
 Weight: 7,5 kg/m²
 Temp. range: dry 4÷80 °C
 wet 4÷65 °C
 Pin material: PP blu
 Hardness: 75 ShA

03 MX - PBT



Max w. load: 20700 N/m
 Weight: 7,8 kg/m²
 Temp. range: dry -40÷120 °C
 wet -40÷60 °C
 Pin material: POM grey
 Hardness: 75 ShA

On request also available in
 other materials and widths

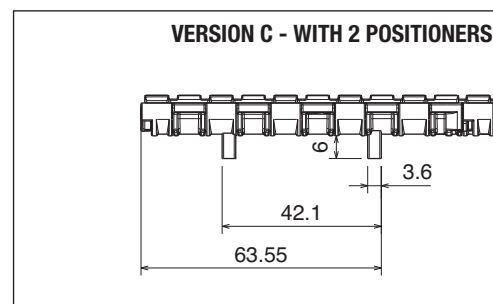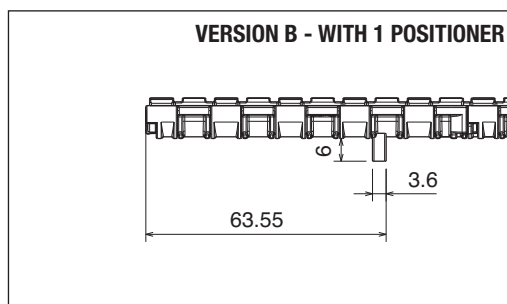

Series	Material	Width	Version
5253	*	0085	B
5253	*	0170	B
5253	*	0255	B
5253	*	0340	B
5253	*	0425	B
5253	*	0510	B
5253	*	0595	B
5253	*	0680	B
5253	*	0765	B

Series	Material	Width	Version
5253	*	0850	B
5253	*	0935	B
5253	*	1020	B
5253	*	1105	B
5253	*	1190	B
5253	*	1275	B
5253	*	1360	B
5253	*	1445	B
5253	*	1530	B

Series	Material	Width	Version
5253	*	0085	C
5253	*	0170	C
5253	*	0255	C
5253	*	0340	C
5253	*	0425	C
5253	*	0510	C
5253	*	0595	C
5253	*	0680	C
5253	*	0765	C


Series	Material	Width	Version
5253	*	0850	C
5253	*	0935	C
5253	*	1020	C
5253	*	1105	C
5253	*	1190	C
5253	*	1275	C
5253	*	1360	C
5253	*	1445	C
5253	*	1530	C



Tappeto Modulare 525 GT, H=8,7 M=85 / Modular Belt Series 525 GT, H=8,7 M=85 / Modulare Mattenkette 525 GT, H=8,7 M=85


Series	Material	Width	Version
5255	*	0255	A
5255	*	0340	A
5255	*	0425	A
5255	*	0510	A
5255	*	0595	A
5255	*	0680	A
5255	*	0765	A
5255	*	0850	A

Series	Material	Width	Version
5255	*	0935	A
5255	*	1020	A
5255	*	1105	A
5255	*	1190	A
5255	*	1275	A
5255	*	1360	A
5255	*	1445	A
5255	*	1530	A

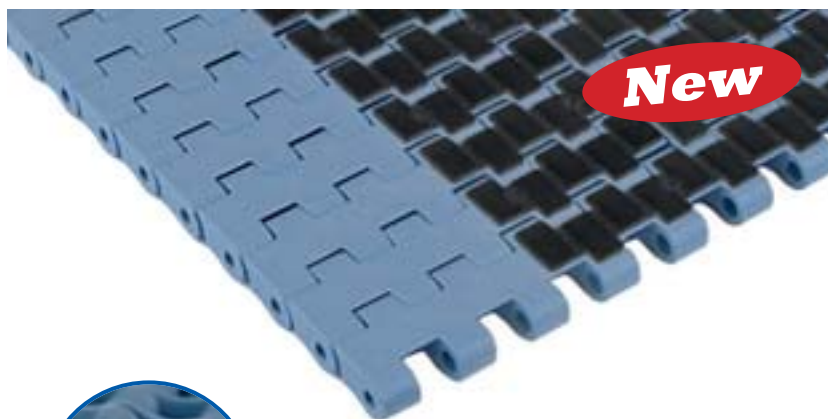

VERSION A - STANDARD

CODE STRUCTURE GUIDE			
5255	03	0340	C
Series	Material	Width	Version

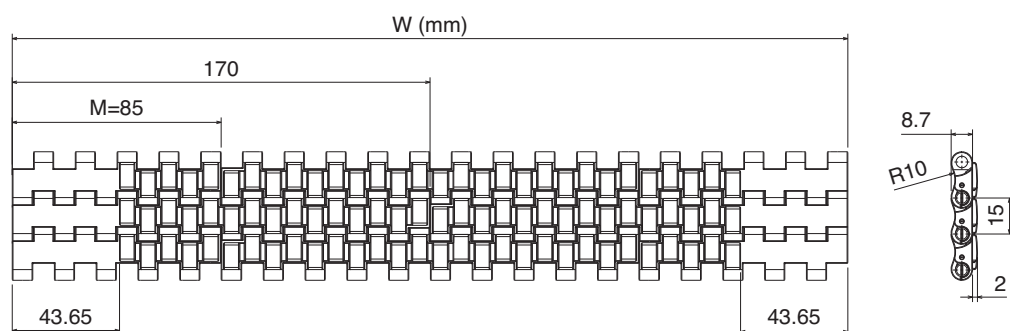

* Material

01 LFA - Acetal Resin



Max w. load: 21500 N/m
Weight: 7,8 kg/m²
Temp. range: dry -40÷80 °C
wet -40÷65 °C
Pin material: PBT white
Hardness: 75 ShA

02 PP - Polypropylene



Max w. load: 13000 N/m
Weight: 7,5 kg/m²
Temp. range: dry 4÷80 °C
wet 4÷65 °C
Pin material: PP blu
Hardness: 75 ShA


03 MX - PBT




Max w. load: 20700 N/m
Weight: 7,8 kg/m²
Temp. range: dry -40÷120 °C
wet -40÷60 °C
Pin material: POM grey
Hardness: 75 ShA

On request also available in
other materials and widths

VERSION B - WITH 1 POSITIONER

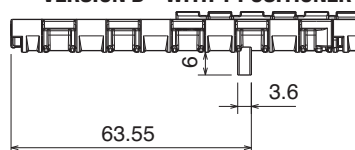

VERSION C - WITH 2 POSITIONERS

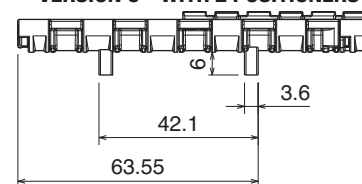

Series	Material	Width	Version
5255	*	0255	B
5255	*	0340	B
5255	*	0425	B
5255	*	0510	B
5255	*	0595	B
5255	*	0680	B
5255	*	0765	B
5255	*	0850	B

Series	Material	Width	Version
5255	*	0935	B
5255	*	1020	B
5255	*	1105	B
5255	*	1190	B
5255	*	1275	B
5255	*	1360	B
5255	*	1445	B
5255	*	1530	B

Series	Material	Width	Version
5255	*	0255	C
5255	*	0340	C
5255	*	0425	C
5255	*	0510	C
5255	*	0595	C
5255	*	0680	C
5255	*	0765	C
5255	*	0850	C

Series	Material	Width	Version
5255	*	0935	C
5255	*	1020	C
5255	*	1105	C
5255	*	1190	C
5255	*	1275	C
5255	*	1360	C
5255	*	1445	C
5255	*	1530	C



pg 112

Imperial
Sizes


Tappeto Modulare 530 FT, H=8,7 M=3" / Modular Belt Series 530 FT, H=8,7 M=3" / Modulare Mattenkette 530 FT, H=8,7 M=3"

Series	Material	Width	Version
5321	*	0003	A
5321	*	0006	A
5321	*	0009	A
5321	*	0012	A
5321	*	0015	A
5321	*	0018	A
5321	*	0021	A
5321	*	0024	A
5321	*	0027	A

Series	Material	Width	Version
5321	*	0030	A
5321	*	0033	A
5321	*	0036	A
5321	*	0039	A
5321	*	0042	A
5321	*	0045	A
5321	*	0048	A
5321	*	0051	A
5321	*	0054	A

VERSION A - STANDARD


CODE STRUCTURE GUIDE			
5321	01	0042	A
Series	Material	Width	Version

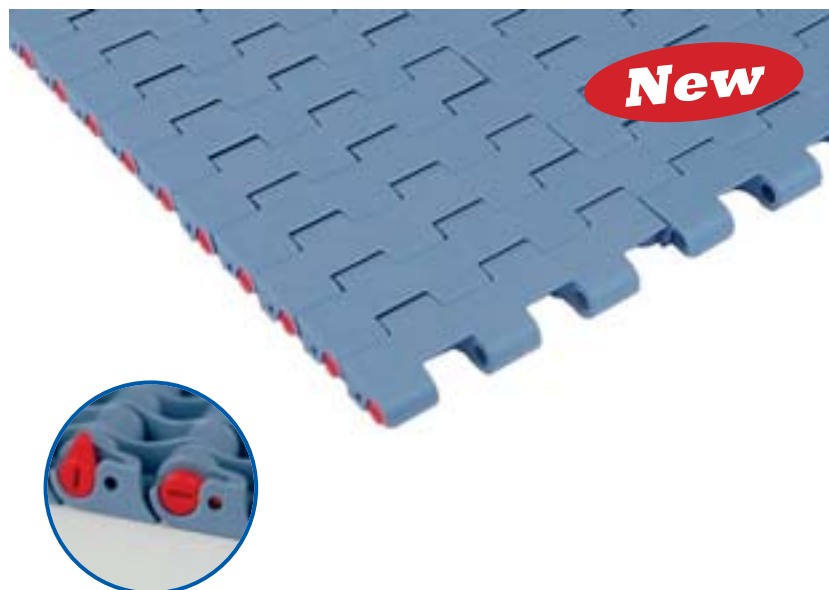

* Material

01 LFA - Acetal Resin

Max w. load: 21500 N/m
 Weight: 7,8 kg/m²
 Temperature range:
 dry -40÷80 °C
 wet -40÷65 °C
 Pin material: PBT white


03 MX - PBT

Max w. load: 17500 N/m
 Weight: 7,5 kg/m²
 Temperature range:
 dry -40÷120 °C
 wet -40÷60 °C
 Pin material: POM grey

08 MK**Super Performance Acetal**

Max w. load: 20700 N/m
 Weight: 7,8 kg/m²
 Temperature range:
 dry -40÷80 °C
 wet -40÷65 °C
 Pin material: PBT white

On request also available in
 other materials and widths

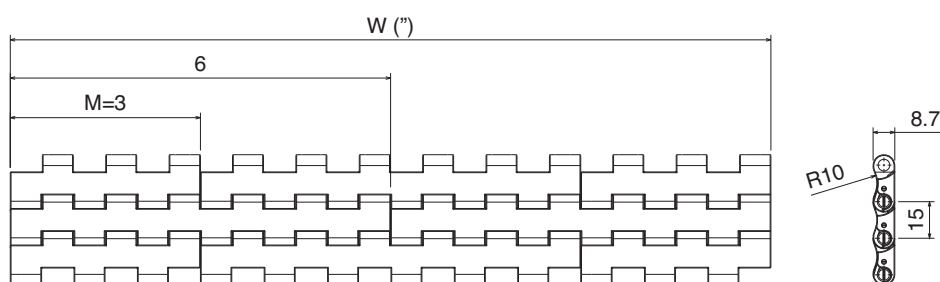


pg 112

Tappeto Modulare 530 GT, H=8,7 M=3" / Modular Belt Series 530 GT, H=8,7 M=3" / Modulare Mattenkette 530 GT, H=8,7 M=3"

Series	Material	Width	Version
5323	*	0003	A
5323	*	0006	A
5323	*	0009	A
5323	*	0012	A
5323	*	0015	A
5323	*	0018	A
5323	*	0021	A
5323	*	0024	A
5323	*	0027	A

Series	Material	Width	Version
5323	*	0030	A
5323	*	0033	A
5323	*	0036	A
5323	*	0039	A
5323	*	0042	A
5323	*	0045	A
5323	*	0048	A
5323	*	0051	A
5323	*	0054	A

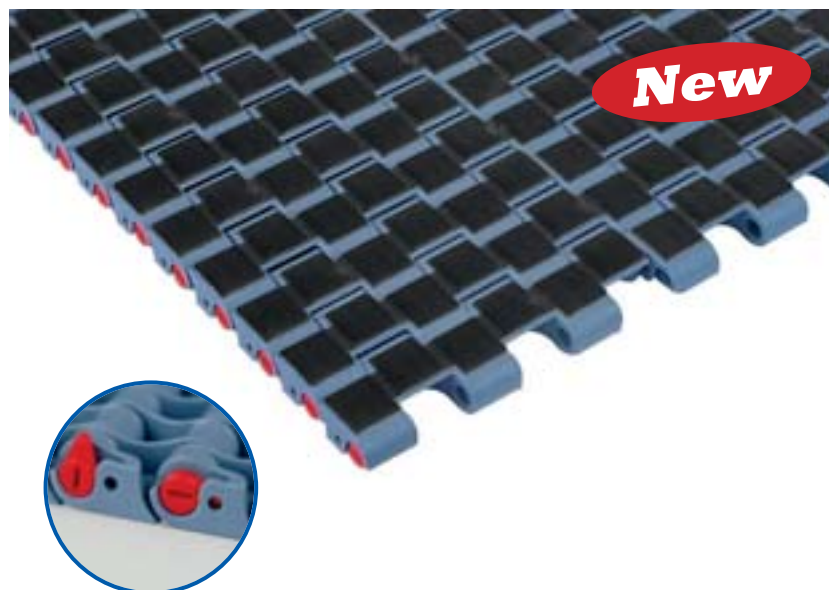

VERSION A - STANDARD

CODE STRUCTURE GUIDE			
5323	01	0009	A
Series	Material	Width	Version

* Material

01 LFA - Acetal Resin



Max w. load: 21500 N/m
Weight: 7,8 kg/m²
Temp. range: dry -40÷80 °C
wet -40÷65 °C
Pin material: PBT white
Hardness: 75 ShA

02 PP - Polypropylene




Max w. load: 13000 N/m
Weight: 7,5 kg/m²
Temp. range: dry 4÷80 °C
wet 4÷65 °C
Pin material: PP blu
Hardness: 75 ShA

03 MX - PBT



Max w. load: 20700 N/m
Weight: 7,8 kg/m²
Temp. range: dry -40÷120 °C
wet -40÷60 °C
Pin material: POM grey
Hardness: 75 ShA

On request also available in
other materials and widths

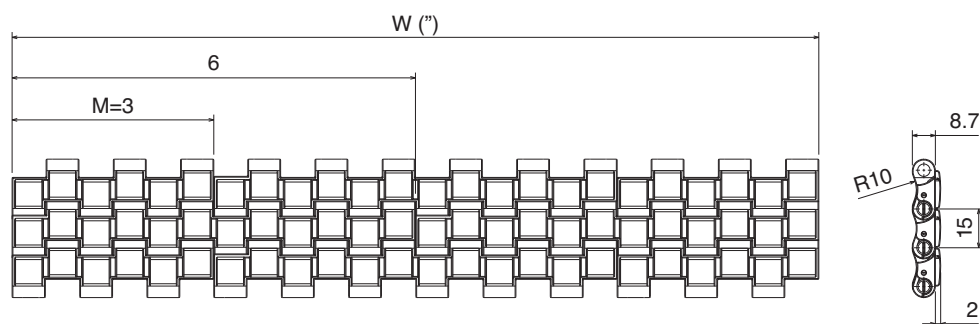

Imperial Sizes

Tappeto Modulare 530 GT, H=8,7 M=3" / Modular Belt Series 530 GT, H=8,7 M=3" / Modulare Mattenkette 530 GT, H=8,7 M=3"

Series	Material	Width	Version
5325	*	0009	A
5325	*	0012	A
5325	*	0015	A
5325	*	0018	A
5325	*	0021	A
5325	*	0024	A
5325	*	0027	A
5325	*	0030	A

Series	Material	Width	Version
5325	*	0033	A
5325	*	0036	A
5325	*	0039	A
5325	*	0042	A
5325	*	0045	A
5325	*	0048	A
5325	*	0051	A
5325	*	0054	A



VERSION A - STANDARD

CODE STRUCTURE GUIDE			
5325	01	0027	A
Series	Material	Width	Version

* Material

01 LFA - Acetal Resin



Max w. load: 21500 N/m
Weight: 7,8 kg/m²
Temp. range: dry -40÷80 °C
wet -40÷65 °C
Pin material: PBT white
Hardness: 75 ShA

02 PP - Polypropylene





Max w. load: 13000 N/m
Weight: 7,5 kg/m²
Temp. range: dry 4÷80 °C
wet 4÷65 °C
Pin material: PP blu
Hardness: 75 ShA

03 MX - PBT



Max w. load: 20700 N/m
Weight: 7,8 kg/m²
Temp. range: dry -40÷120 °C
wet -40÷60 °C
Pin material: POM grey
Hardness: 75 ShA

On request also available in other materials and widths

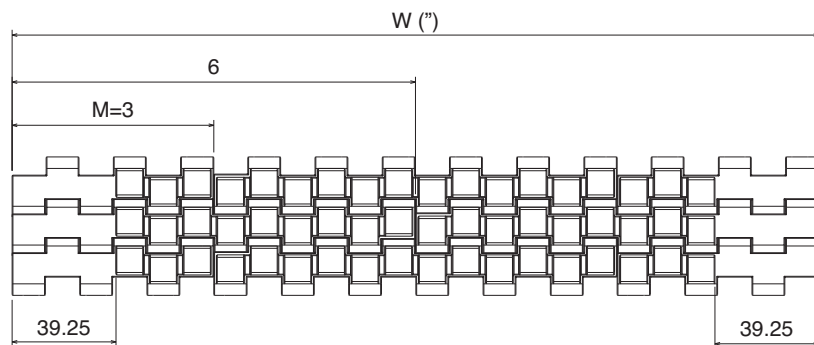

pg 112


Tappeto Modulare 550 FT, H=8,7 M=85 / Modular Belt Series 550 FT, H=8,7 M=85 / Modulare Mattenkette 550 FT, H=8,7 M=85

Series	Material	Width	Version
5221	*	0085	A
5221	*	0170	A
5221	*	0255	A
5221	*	0340	A
5221	*	0425	A
5221	*	0510	A
5221	*	0595	A
5221	*	0680	A
5221	*	0765	A

Series	Material	Width	Version
5221	*	0850	A
5221	*	0935	A
5221	*	1020	A
5221	*	1105	A
5221	*	1190	A
5221	*	1275	A
5221	*	1360	A
5221	*	1445	A
5221	*	1530	A

CODE STRUCTURE GUIDE


5221	08	0255	A
Series	Material	Width	Version

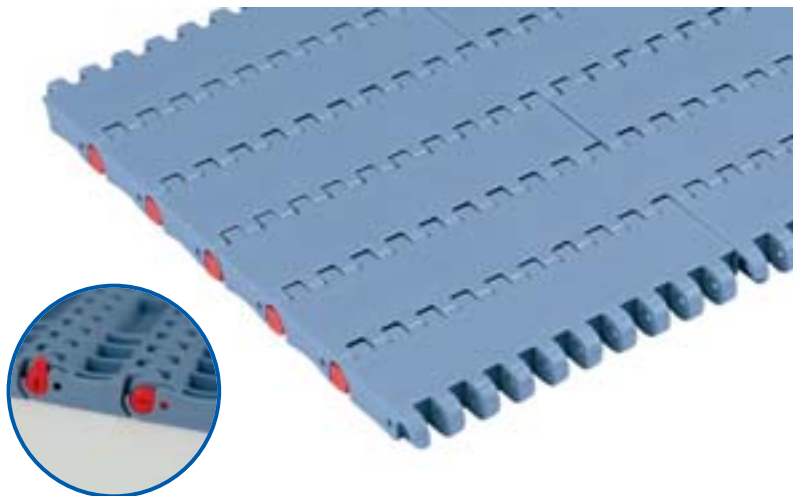

VERSION A - STANDARD

One Track Belt - K330

Series	Material	Width	Version
5221	*	9330	A
5221	*	9330	C

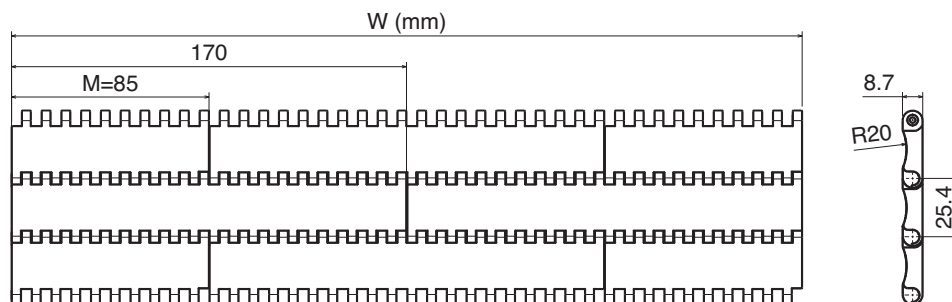

* Material

01 LFA - Acetal Resin

Max working load: 27500 N/m
 Weight: 8,5 kg/m²
 Temperature range:
 dry -40÷80 °C
 wet -40÷65 °C
 Pin material: PBT white

03 MX - PBT

Max working load: 22000 N/m
 Weight: 8,2 kg/m²
 Temperature range:
 dry -40÷120 °C
 wet -40÷60 °C
 Pin material: POM grey


08 MK

Super Performance Acetal


Max working load: 26500 N/m
 Weight: 8,5 kg/m²
 Temperature range:
 dry -40÷80 °C
 wet -40÷65 °C
 Pin material: PBT white

On request also available in
 other materials and widths

VERSION B - WITH 1 POSITIONER



VERSION C - WITH 2 POSITIONERS

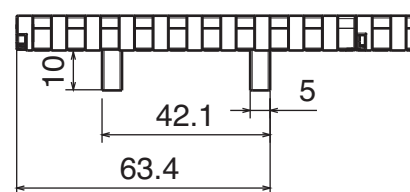

Series	Material	Width	Version
5221	*	0085	B
5221	*	0170	B
5221	*	0255	B
5221	*	0340	B
5221	*	0425	B
5221	*	0510	B
5221	*	0595	B
5221	*	0680	B
5221	*	0765	B

Series	Material	Width	Version
5221	*	0850	B
5221	*	0935	B
5221	*	1020	B
5221	*	1105	B
5221	*	1190	B
5221	*	1275	B
5221	*	1360	B
5221	*	1445	B
5221	*	1530	B

Series	Material	Width	Version
5221	*	0085	C
5221	*	0170	C
5221	*	0255	C
5221	*	0340	C
5221	*	0425	C
5221	*	0510	C
5221	*	0595	C
5221	*	0680	C
5221	*	0765	C

Series	Material	Width	Version
5221	*	0850	C
5221	*	0935	C
5221	*	1020	C
5221	*	1105	C
5221	*	1190	C
5221	*	1275	C
5221	*	1360	C
5221	*	1445	C
5221	*	1530	C



**Metric
Sizes**

Tappeto Modulare 550 FTT, H=8,7 M=85 / Modular Belt Series 550 FTT, H=8,7 M=85 / Modulare Mattenkette 550 FTT, H=8,7 M=85


CODE STRUCTURE GUIDE

5226	03	0255	B
Series	Material	Width	Version


New



VERSION CN

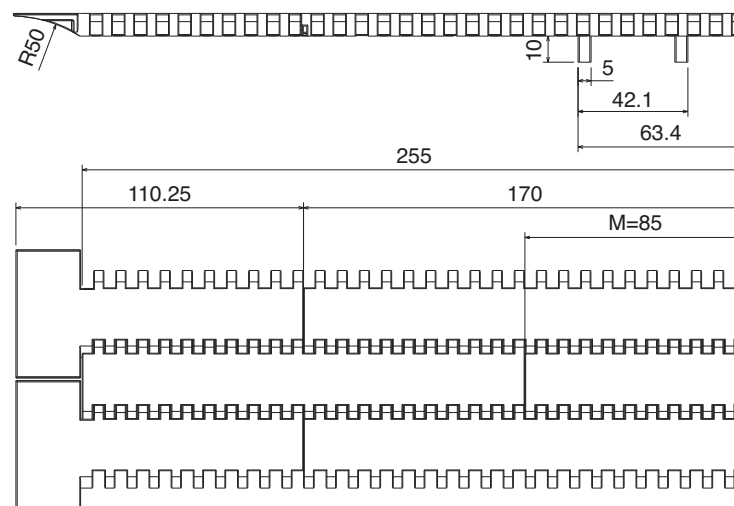

VERSION C0



*** Material**

01 LFA - Acetal Resin

Max working load: 27500 N/m
Weight: 8,5 kg/m²
Temperature range:
dry -40÷80 °C
wet -40÷65 °C
Pin material: PBT white

03 MX - PBT

Max working load: 22000 N/m
Weight: 8,2 kg/m²
Temperature range:
dry -40÷120 °C
wet -40÷60 °C
Pin material: POM grey

08 MK

Super Performance Acetal

Max working load: 26500 N/m
Weight: 8,5 kg/m²
Temperature range:
dry -40÷80 °C
wet -40÷65 °C
Pin material: PBT white

On request also available in
other materials and widths

Series	Material	Width	Version
5226	*	0085	CN
5226	*	0170	CN
5226	*	0255	CN


Series	Material	Width	Version
5226	*	0085	C0
5226	*	0170	C0
5226	*	0255	C0



Tappeto Modulare 550 FG, H=8,7 M=85 / Modular Belt Series 550 FG, H=8,7 M=85 / Modulare Mattenkette 550 FG, H=8,7 M=85

Series	Material	Width	Version
5222	*	0085	A
5222	*	0170	A
5222	*	0255	A
5222	*	0340	A
5222	*	0425	A
5222	*	0510	A
5222	*	0595	A
5222	*	0680	A
5222	*	0765	A

Series	Material	Width	Version
5222	*	0850	A
5222	*	0935	A
5222	*	1020	A
5222	*	1105	A
5222	*	1190	A
5222	*	1275	A
5222	*	1360	A
5222	*	1445	A
5222	*	1530	A

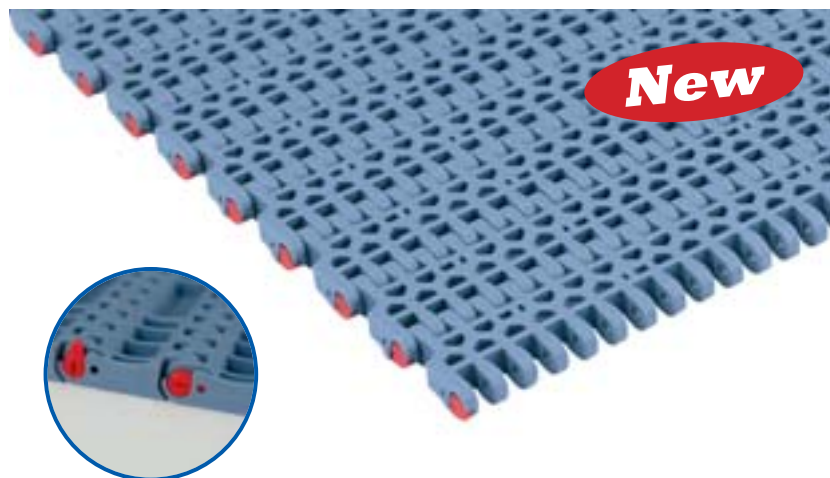


CODE STRUCTURE GUIDE			
5222	01	0850	C
Series	Material	Width	Version

VERSION A - STANDARD

One Track Belt - K330

Series	Material	Width	Version
5222	*	9330	A
5222	*	9330	C

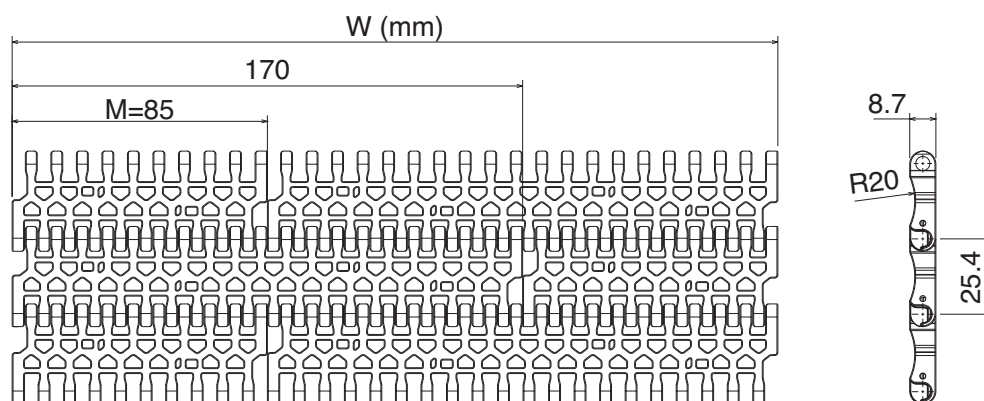

* Material

01 LFA - Acetal Resin



Max working load: 27500 N/m
Weight: 7,0 kg/m²
Temperature range:
dry -40÷80 °C
wet -40÷65 °C
Pin material: PBT white

03 MX - PBT



Max working load: 22000 N/m
Weight: 6,7 kg/m²
Temperature range:
dry -40÷120 °C
wet -40÷60 °C
Pin material: POM grey

08 MK


Super Performance Acetal




Max working load: 26500 N/m
Weight: 7,0 kg/m²
Temperature range:
dry -40÷80 °C
wet -40÷65 °C
Pin material: PBT white

On request also available in
other materials and widths

VERSION B - WITH 1 POSITIONER

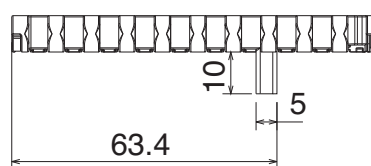

VERSION C - WITH 2 POSITIONERS

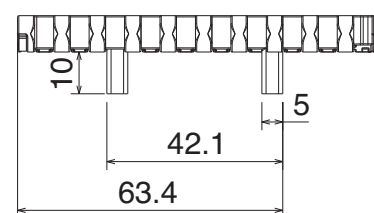

Series	Material	Width	Version
5222	*	0085	B
5222	*	0170	B
5222	*	0255	B
5222	*	0340	B
5222	*	0425	B
5222	*	0510	B
5222	*	0595	B
5222	*	0680	B
5222	*	0765	B

Series	Material	Width	Version
5222	*	0850	B
5222	*	0935	B
5222	*	1020	B
5222	*	1105	B
5222	*	1190	B
5222	*	1275	B
5222	*	1360	B
5222	*	1445	B
5222	*	1530	B

Series	Material	Width	Version
5222	*	0085	C
5222	*	0170	C
5222	*	0255	C
5222	*	0340	C
5222	*	0425	C
5222	*	0510	C
5222	*	0595	C
5222	*	0680	C
5222	*	0765	C

Series	Material	Width	Version
5222	*	0850	C
5222	*	0935	C
5222	*	1020	C
5222	*	1105	C
5222	*	1190	C
5222	*	1275	C
5222	*	1360	C
5222	*	1445	C
5222	*	1530	C




pg 114-115

Metric
Sizes

Tappeto Modulare 550 GT, H=8,7 M=85 / Modular Belt Series 550 GT, H=8,7 M=85 / Modulare Mattenkette 550 GT, H=8,7 M=85


Series	Material	Width	Version
5223	*	0085	A
5223	*	0170	A
5223	*	0255	A
5223	*	0340	A
5223	*	0425	A
5223	*	0510	A
5223	*	0595	A
5223	*	0680	A
5223	*	0765	A

Series	Material	Width	Version
5223	*	0850	A
5223	*	0935	A
5223	*	1020	A
5223	*	1105	A
5223	*	1190	A
5223	*	1275	A
5223	*	1360	A
5223	*	1445	A
5223	*	1530	A

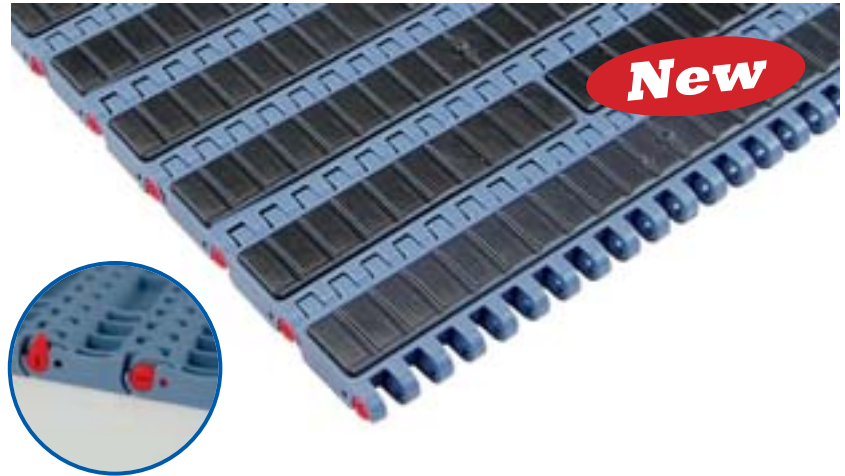

CODE STRUCTURE GUIDE			
5223	02	1020	A
Series	Material	Width	Version

VERSION A - STANDARD

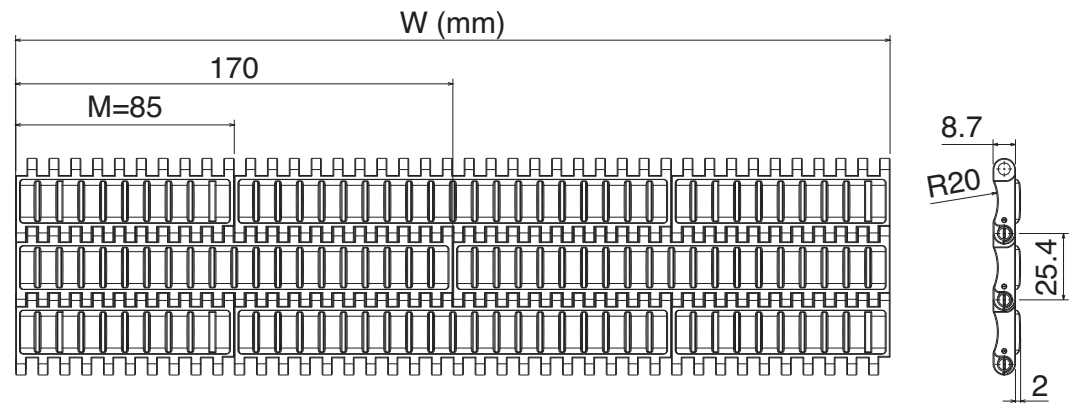

* Material

01 LFA - Acetal Resin



Max working load: 27500 N/m
 Weight: 10,1 kg/m²
 Temp. range: dry -40÷80 °C
 wet -40÷65 °C
 Pin material: PBT white
 Hardness: 75 ShA

02 PP - Polypropylene





Max working load: 16500 N/m
 Weight: 8,4 kg/m²
 Temp. range: dry 4÷80 °C
 wet 4÷65 °C
 Pin material: PP blu
 Hardness: 75 ShA

03 MX - PBT



Max working load: 21500 N/m
 Weight: 10,5 kg/m²
 Temp. range: dry -40÷120 °C
 wet -40÷60 °C
 Pin material: POM grey
 Hardness: 75 ShA

On request also available in
 other materials and widths

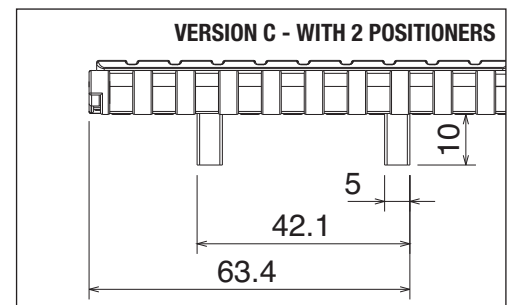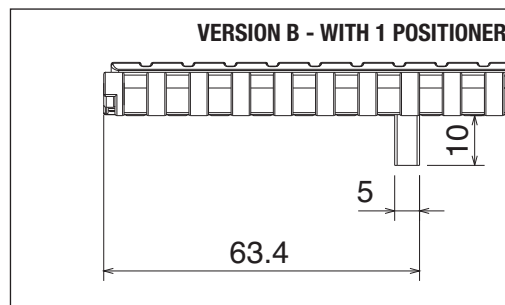

Series	Material	Width	Version
5223	*	0085	B
5223	*	0170	B
5223	*	0255	B
5223	*	0340	B
5223	*	0425	B
5223	*	0510	B
5223	*	0595	B
5223	*	0680	B
5223	*	0765	B

Series	Material	Width	Version
5223	*	0850	B
5223	*	0935	B
5223	*	1020	B
5223	*	1105	B
5223	*	1190	B
5223	*	1275	B
5223	*	1360	B
5223	*	1445	B
5223	*	1530	B

Series	Material	Width	Version
5223	*	0085	C
5223	*	0170	C
5223	*	0255	C
5223	*	0340	C
5223	*	0425	C
5223	*	0510	C
5223	*	0595	C
5223	*	0680	C
5223	*	0765	C

Series	Material	Width	Version
5223	*	0850	C
5223	*	0935	C
5223	*	1020	C
5223	*	1105	C
5223	*	1190	C
5223	*	1275	C
5223	*	1360	C
5223	*	1445	C
5223	*	1530	C




pg 114-115

Tappeto Modulare 550 GT, H=8,7 M=85 / Modular Belt Series 550 GT, H=8,7 M=85 / Modulare Mattenkette 550 GT, H=8,7 M=85


Series	Material	Width	Version
5225	*	0255	A
5225	*	0340	A
5225	*	0425	A
5225	*	0510	A
5225	*	0595	A
5225	*	0680	A
5225	*	0765	A
5225	*	0850	A

Series	Material	Width	Version
5225	*	0935	A
5225	*	1020	A
5225	*	1105	A
5225	*	1190	A
5225	*	1275	A
5225	*	1360	A
5225	*	1445	A
5225	*	1530	A

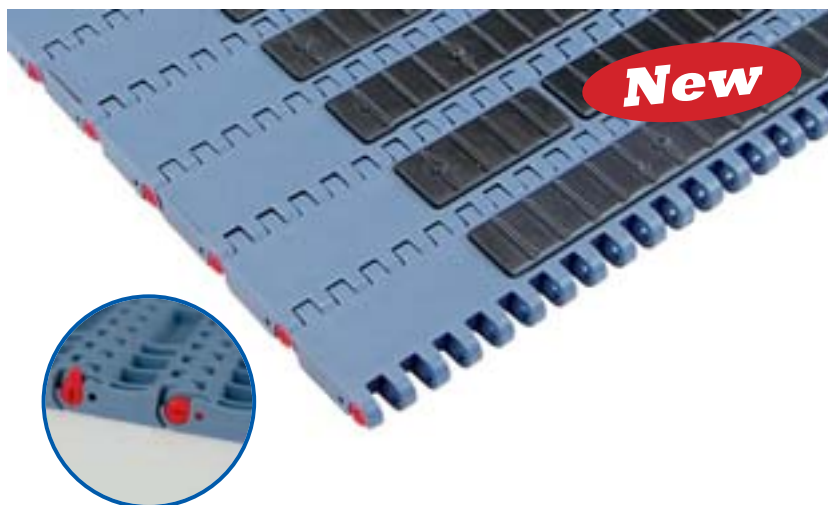

CODE STRUCTURE GUIDE			
5225	02	0595	B
Series	Material	Width	Version

VERSION A - STANDARD

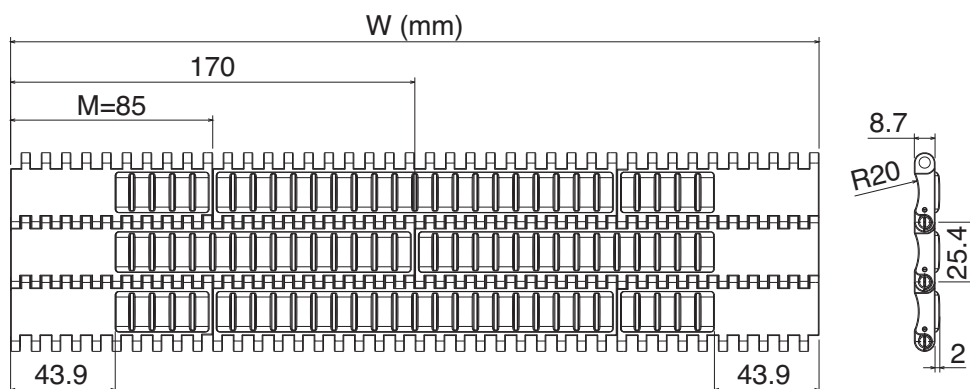

* Material

01 LFA - Acetal Resin



Max working load: 27500 N/m
Weight: 9,8 kg/m²
Temp. range: dry -40÷80 °C
wet -40÷65 °C
Pin material: PBT white
Hardness: 75 ShA

02 PP - Polypropylene





Max working load: 16500 N/m
Weight: 8,2 kg/m²
Temp. range: dry 4÷80 °C
wet 4÷65 °C
Pin material: PP blu
Hardness: 75 ShA

03 MX - PBT



Max working load: 21500 N/m
Weight: 10,3 kg/m²
Temp. range: dry -40÷120 °C
wet -40÷60 °C
Pin material: POM grey
Hardness: 75 ShA

On request also available in
other materials and widths

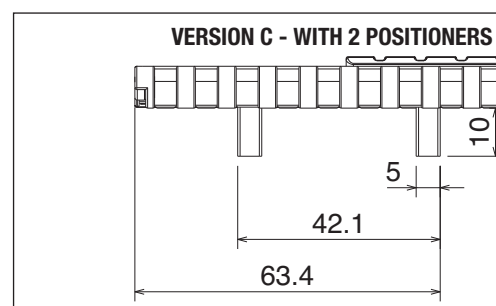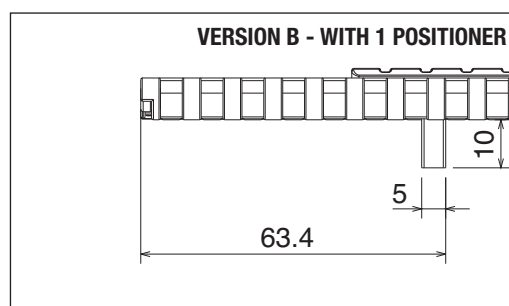

Series	Material	Width	Version
5225	*	0255	B
5225	*	0340	B
5225	*	0425	B
5225	*	0510	B
5225	*	0595	B
5225	*	0680	B
5225	*	0765	B
5225	*	0850	B

Series	Material	Width	Version
5225	*	0935	B
5225	*	1020	B
5225	*	1105	B
5225	*	1190	B
5225	*	1275	B
5225	*	1360	B
5225	*	1445	B
5225	*	1530	B

Series	Material	Width	Version
5225	*	0255	C
5225	*	0340	C
5225	*	0425	C
5225	*	0510	C
5225	*	0595	C
5225	*	0680	C
5225	*	0765	C
5225	*	0850	C

Series	Material	Width	Version
5225	*	0935	C
5225	*	1020	C
5225	*	1105	C
5225	*	1190	C
5225	*	1275	C
5225	*	1360	C
5225	*	1445	C
5225	*	1530	C



Metric
Sizes

Tappeto Modulare 551 FT, H=12,7 M=85 / Modular Belt Series 551 FT, H=12,7 M=85 / Modulare Mattenkette 551 FT, H=12,7 M=85


Series	Material	Width	Version
5231	*	0085	A
5231	*	0170	A
5231	*	0255	A
5231	*	0340	A
5231	*	0425	A
5231	*	0510	A
5231	*	0595	A
5231	*	0680	A
5231	*	0765	A

Series	Material	Width	Version
5231	*	0850	A
5231	*	0935	A
5231	*	1020	A
5231	*	1105	A
5231	*	1190	A
5231	*	1275	A
5231	*	1360	A
5231	*	1445	A
5231	*	1530	A

CODE STRUCTURE GUIDE			
5231	01	0680	C
Series	Material	Width	Version



VERSION A - STANDARD

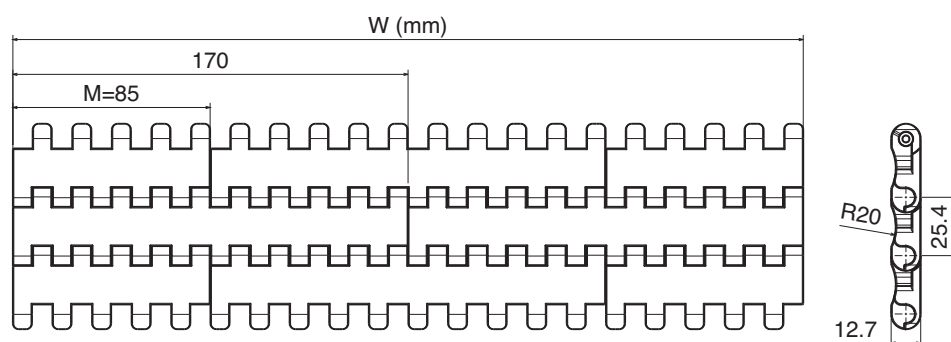

* Material

01 LFA - Acetal Resin

Max working load: 41500 N/m
Weight: 12,5 kg/m²
Temperature range:
dry -40÷80 °C
wet 0÷65 °C
Pin material: PBT white

03 MX - PBT

Max working load: 33500 N/m
Weight: 12,0 kg/m²
Temperature range:
dry -40÷120 °C
wet -40÷60 °C
Pin material: POM grey


08 MK

Super Performance Acetal


Max working load: 40000 N/m
Weight: 12,5 kg/m²
Temperature range:
dry -40÷80 °C
wet 0÷65 °C
Pin material: PBT white

On request also available in
other materials and widths

VERSION B - WITH 1 POSITIONER

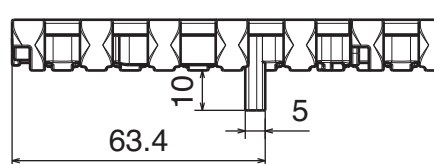

VERSION C - WITH 2 POSITIONERS

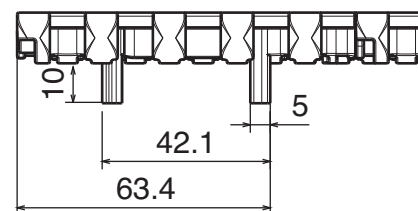

Series	Material	Width	Version
5231	*	0085	B
5231	*	0170	B
5231	*	0255	B
5231	*	0340	B
5231	*	0425	B
5231	*	0510	B
5231	*	0595	B
5231	*	0680	B
5231	*	0765	B

Series	Material	Width	Version
5231	*	0850	B
5231	*	0935	B
5231	*	1020	B
5231	*	1105	B
5231	*	1190	B
5231	*	1275	B
5231	*	1360	B
5231	*	1445	B
5231	*	1530	B

Series	Material	Width	Version
5231	*	0085	C
5231	*	0170	C
5231	*	0255	C
5231	*	0340	C
5231	*	0425	C
5231	*	0510	C
5231	*	0595	C
5231	*	0680	C
5231	*	0765	C

Series	Material	Width	Version
5231	*	0850	C
5231	*	0935	C
5231	*	1020	C
5231	*	1105	C
5231	*	1190	C
5231	*	1275	C
5231	*	1360	C
5231	*	1445	C
5231	*	1530	C




pg 116-117

Tappeto Modulare 551 GT, H=12,7 M=85 / Modular Belt Series 551 GT, H=12,7 M=85 / Modulare Mattenkette 551 GT, H=12,7 M=85


Series	Material	Width	Version
5233	*	0085	A
5233	*	0170	A
5233	*	0255	A
5233	*	0340	A
5233	*	0425	A
5233	*	0510	A
5233	*	0595	A
5233	*	0680	A
5233	*	0765	A

Series	Material	Width	Version
5233	*	0850	A
5233	*	0935	A
5233	*	1020	A
5233	*	1105	A
5233	*	1190	A
5233	*	1275	A
5233	*	1360	A
5233	*	1445	A
5233	*	1530	A

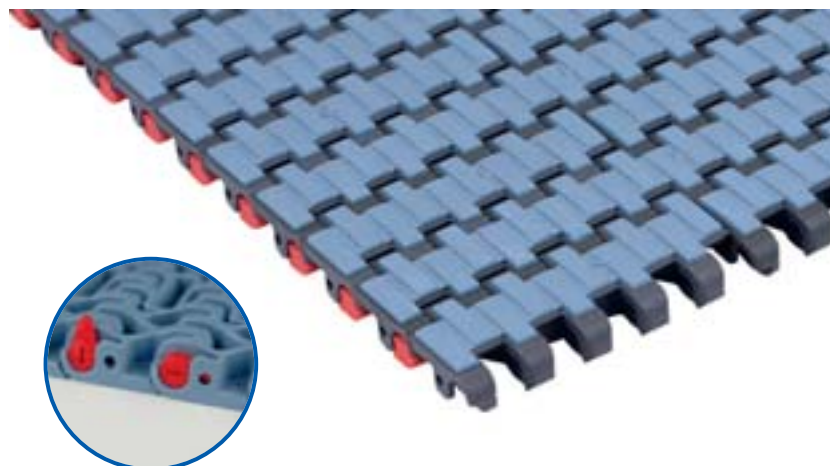

CODE STRUCTURE GUIDE			
5233	01	0255	B
Series	Material	Width	Version

VERSION A - STANDARD

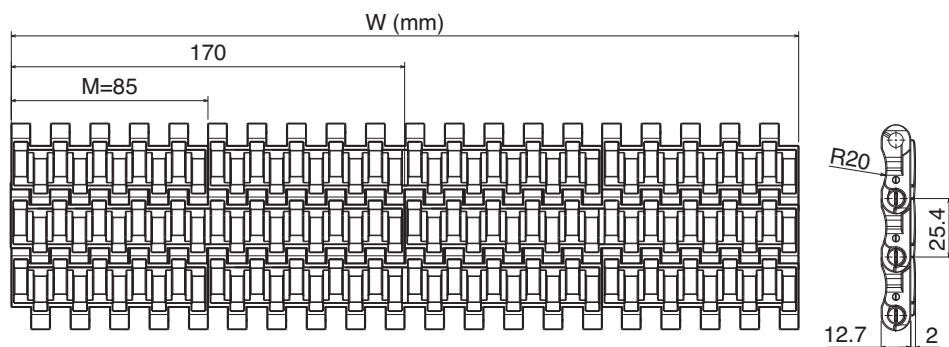

* Material

01 LFA - Acetal Resin



Max working load: 41500 N/m
 Weight: 13,5 kg/m²
 Temp. range: dry -40÷80 °C
 wet -40÷65 °C
 Pin material: PBT white
 Hardness: 75 ShA

02 PP - Polypropylene



Max working load: 27000 N/m
 Weight: 11,00 kg/m²
 Temp. range: dry 4÷65 °C
 wet 4÷65 °C
 Pin material: PP blu
 Hardness: 75 ShA


03 MX - PBT




Max working load: 33500 N/m
 Weight: 12,7 kg/m²
 Temp. range: dry -40÷120 °C
 wet -40÷60 °C
 Pin material: POM grey
 Hardness: 75 ShA

On request also available in
 other materials and widths

VERSION B - WITH 1 POSITIONER



VERSION C - WITH 2 POSITIONERS



Series	Material	Width	Version
5233	*	0085	B
5233	*	0170	B
5233	*	0255	B
5233	*	0340	B
5233	*	0425	B
5233	*	0510	B
5233	*	0595	B
5233	*	0680	B
5233	*	0765	B

Series	Material	Width	Version
5233	*	0850	B
5233	*	0935	B
5233	*	1020	B
5233	*	1105	B
5233	*	1190	B
5233	*	1275	B
5233	*	1360	B
5233	*	1445	B
5233	*	1530	B

Series	Material	Width	Version
5233	*	0085	C
5233	*	0170	C
5233	*	0255	C
5233	*	0340	C
5233	*	0425	C
5233	*	0510	C
5233	*	0595	C
5233	*	0680	C
5233	*	0765	C


Series	Material	Width	Version
5233	*	0850	C
5233	*	0935	C
5233	*	1020	C
5233	*	1105	C
5233	*	1190	C
5233	*	1275	C
5233	*	1360	C
5233	*	1445	C
5233	*	1530	C

**Metric
Sizes**


Tappeto Modulare 551 GT, H=12,7 M=85 / Modular Belt Series 551 GT, H=12,7 M=85 / Modulare Mattenkette 551 GT, H=12,7 M=85

Series	Material	Width	Version
5235	*	0255	A
5235	*	0340	A
5235	*	0425	A
5235	*	0510	A
5235	*	0595	A
5235	*	0680	A
5235	*	0765	A
5235	*	0850	A

Series	Material	Width	Version
5235	*	0935	A
5235	*	1020	A
5235	*	1105	A
5235	*	1190	A
5235	*	1275	A
5235	*	1360	A
5235	*	1445	A
5235	*	1530	A

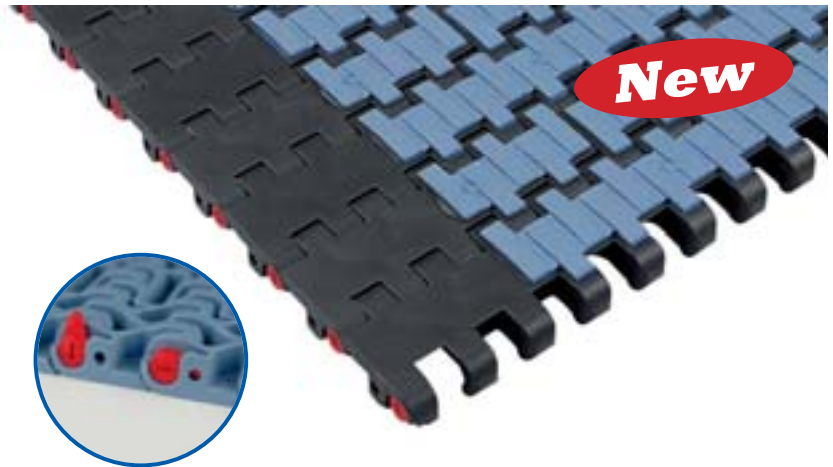

CODE STRUCTURE GUIDE			
5235	02	0765	A
Series	Material	Width	Version

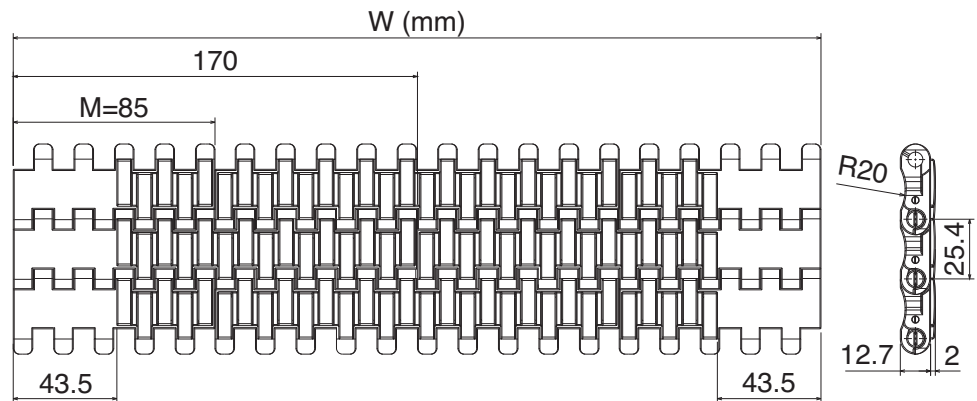VERSION A - STANDARD*** Material****01 LFA - Acetal Resin**

Max working load: 41500 N/m
 Weight: 13,2 kg/m²
 Temp. range: dry -40÷80 °C
 wet -40÷65 °C
 Pin material: PBT white
 Hardness: 75 ShA



02 PP - Polypropylene

Max working load: 27000 N/m
 Weight: 10,8 kg/m²
 Temp. range: dry 4÷65 °C
 wet 4÷65 °C
 Pin material: PP blu
 Hardness: 75 ShA

03 MX - PBT

Max working load: 33500 N/m
 Weight: 12,5 kg/m²
 Temp. range: dry -40÷120 °C
 wet -40÷60 °C
 Pin material: POM grey
 Hardness: 75 ShA

On request also available in
 other materials and widths

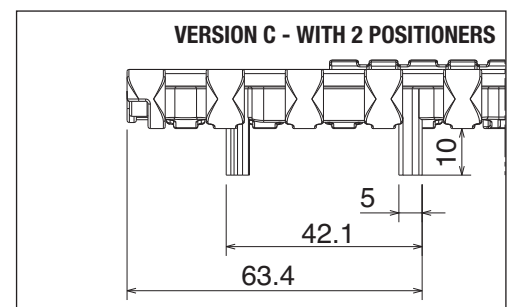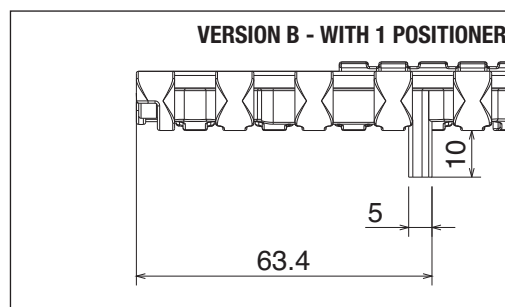

Series	Material	Width	Version
5235	*	0255	B
5235	*	0340	B
5235	*	0425	B
5235	*	0510	B
5235	*	0595	B
5235	*	0680	B
5235	*	0765	B
5235	*	0850	B

Series	Material	Width	Version
5235	*	0935	B
5235	*	1020	B
5235	*	1105	B
5235	*	1190	B
5235	*	1275	B
5235	*	1360	B
5235	*	1445	B
5235	*	1530	B

Series	Material	Width	Version
5235	*	0255	C
5235	*	0340	C
5235	*	0425	C
5235	*	0510	C
5235	*	0595	C
5235	*	0680	C
5235	*	0765	C
5235	*	0850	C

Series	Material	Width	Version
5235	*	0935	C
5235	*	1020	C
5235	*	1105	C
5235	*	1190	C
5235	*	1275	C
5235	*	1360	C
5235	*	1445	C
5235	*	1530	C



pg 116-117


Tappeto Modulare 551 LBP, H=12,7 M=85 / Modular Belt Series 551 LBP, H=12,7 M=85 / Modulare Mattenkette 551 LBP, H=12,7 M=85

Series	Material	Width	Version
5234	*	0085	A
5234	*	0170	A
5234	*	0255	A
5234	*	0340	A
5234	*	0425	A
5234	*	0510	A
5234	*	0595	A
5234	*	0680	A
5234	*	0765	A


Series	Material	Width	Version
5234	*	0850	A
5234	*	0935	A
5234	*	1020	A
5234	*	1105	A
5234	*	1190	A
5234	*	1275	A
5234	*	1360	A
5234	*	1445	A
5234	*	1530	A

CODE STRUCTURE GUIDE

5234	01	0425	A
Series	Material	Width	Version

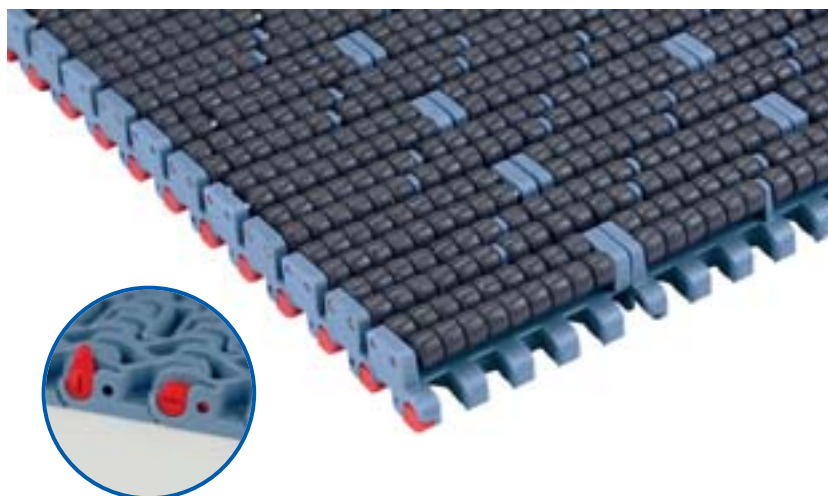

VERSION A - STANDARD

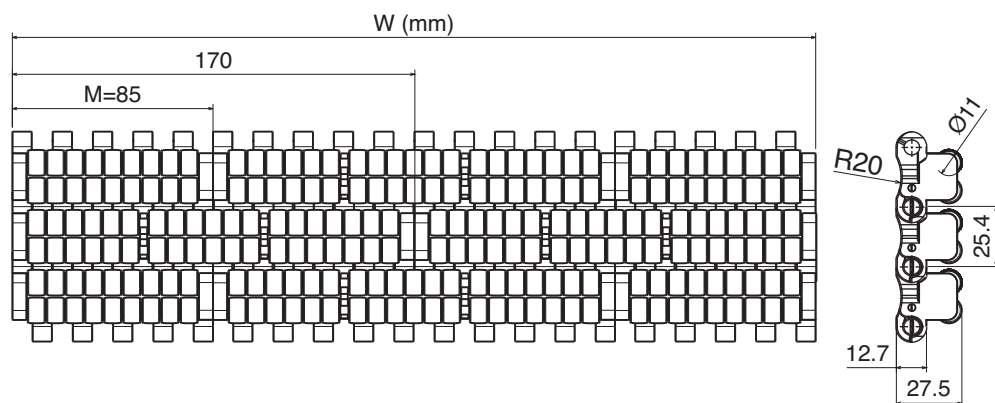

* Material


01 LFA - Acetal Resin




Max working load: 41500 N/m
Weight: 26,9 kg/m²
Temperature range:
dry -40-80 °C
wet 1÷65 °C
Pin material: PBT white

On request also available in other materials and widths

VERSION B - WITH 1 POSITIONER



VERSION C - WITH 2 POSITIONERS



Series	Material	Width	Version
5234	*	0085	B
5234	*	0170	B
5234	*	0255	B
5234	*	0340	B
5234	*	0425	B
5234	*	0510	B
5234	*	0595	B
5234	*	0680	B
5234	*	0765	B

Series	Material	Width	Version
5234	*	0850	B
5234	*	0935	B
5234	*	1020	B
5234	*	1105	B
5234	*	1190	B
5234	*	1275	B
5234	*	1360	B
5234	*	1445	B
5234	*	1530	B

Series	Material	Width	Version
5234	*	0085	C
5234	*	0170	C
5234	*	0255	C
5234	*	0340	C
5234	*	0425	C
5234	*	0510	C
5234	*	0595	C
5234	*	0680	C
5234	*	0765	C

Series	Material	Width	Version
5234	*	0850	C
5234	*	0935	C
5234	*	1020	C
5234	*	1105	C
5234	*	1190	C
5234	*	1275	C
5234	*	1360	C
5234	*	1445	C
5234	*	1530	C

Metric Sizes

Tappeto Modulare Curvilineo Serie 600, H=12,7 M=85 / Side Flex Modular Belt Series 600, H=12,7 M=85 / Kurvengängige Mattenkette Serie 600, H=12,7 M=85

* Material

01 LFA - Acetal Resin



Max working load:
straight 30000N/m
curve 2500N
Weight: 7,7 kg/m²
Temperature range:
dry -40÷80 °C
wet 1÷65 °C
Pin material: PBT white

03 MX - PBT



Max working load:
straight 24000N/m
curve 2000N
Weight: 7,5 kg/m²
Temperature range:
dry -40÷120 °C
wet -40÷60 °C
Pin material: POM grey

08 MK

Super Performance Acetal




Max working load:
straight 28800N/m
curve 2400N
Weight: 7,7 kg/m²
Temperature range:
dry -40÷80 °C
wet 1÷65 °C
Pin material: PBT white

On request also available in other materials and widths




pg 120

Min Radius
2 times
the width

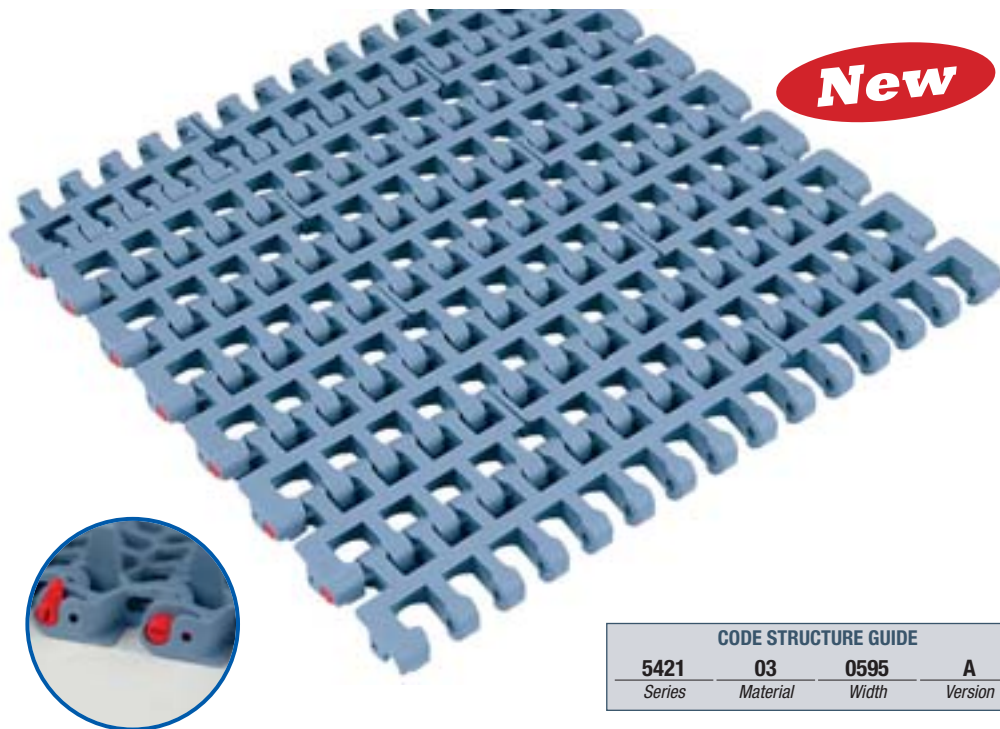

CODE STRUCTURE GUIDE


5421	03	0595	A
Series	Material	Width	Version

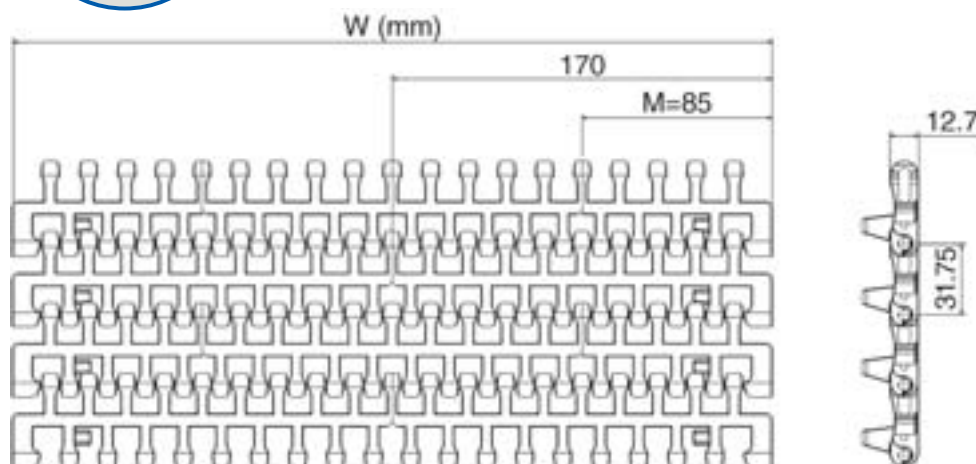


STANDARD




TAB



REVERSE TAB



TrT (TAB reverse TAB)



Series	Material	Width	Version	min radius
5421	*	0255	A	510
5421	*	0340	A	680
5421	*	0425	A	850
5421	*	0510	A	1020
5421	*	0595	A	1190
5421	*	0680	A	1360
5421	*	0765	A	1530
5421	*	0850	A	1700

Series	Material	Width	Version	min radius
5421	*	0255	B	510
5421	*	0340	B	680
5421	*	0425	B	850
5421	*	0510	B	1020
5421	*	0595	B	1190
5421	*	0680	B	1360
5421	*	0765	B	1530
5421	*	0850	B	1700

Series	Material	Width	Version	min radius
5421	*	0255	C	510
5421	*	0340	C	680
5421	*	0425	C	850
5421	*	0510	C	1020
5421	*	0595	C	1190
5421	*	0680	C	1360
5421	*	0765	C	1530
5421	*	0850	C	1700

Series	Material	Width	Version	min radius
5421	*	0255	D	510
5421	*	0340	D	680
5421	*	0425	D	850
5421	*	0510	D	1020
5421	*	0595	D	1190
5421	*	0680	D	1360
5421	*	0765	D	1530
5421	*	0850	D	1700

Tappeto Modulare 500 RR / Raised Rib Belt Series 500 RR / Modulare Mattenkette 500 RR

Series	Material	Width
1348	*	0060
1348	*	0063
1348	*	0066
1348	*	0069
1348	*	0072
1348	*	0075
1348	*	0078
1348	*	0081
1348	*	0084
1348	*	0087
1348	*	0090
1348	*	0093
1348	*	0096
1348	*	0099
1348	*	0102
1348	*	0105
1348	*	0108
1348	*	0111
1348	*	0114
1348	*	0117
1348	*	0120



CODE STRUCTURE GUIDE		
1348	11	0090
Series	Material	Width

* Material

02 PP - Polypropylene





Max working load: 30000 N/m
Weight: 10,65 kg/m²
Temperature range: 4÷104° C
Pin material: PP grey

11 PPX - Polypropylene




Max working load: 30000 N/m
Weight: 10,65 kg/m²
Temperature range: 4÷104° C
Pin material: PP grey

On request also available in
other materials and widths

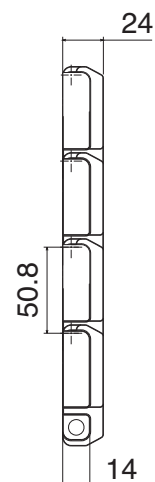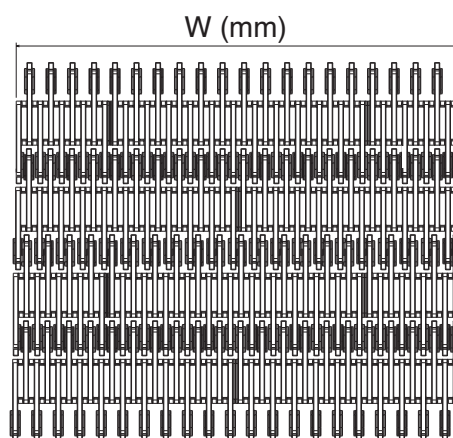

Pettine / Combs / Fingerplatte

Part	Article-Nr.	A
389	38901	152
389	38902	190

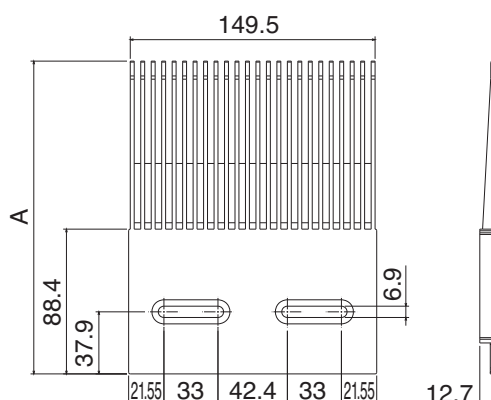

260M

Catena curvilinea / Sideflexing belt/chain / Kurvengängige Mattenkette



Part	Article-Nr.	Ref.	A	Weight LFA
1151	11510103	260M K330	83,8	1,75
1151	11510105	260M K450	114,3	1,95

* Material

01 LFA - Acetal Resin



Max w. load: 2000 N/m
Sideflex radius: 500 mm
Pin material: Ferritic SS

03 MX - PBT



Max w. load: 1600 N/m
Sideflex radius: 500 mm
Pin material: Ferritic SS




08 MK

Super Performance Acetal



Max w. load: 1950 N/m
Sideflex radius: 500 mm
Pin material: Ferritic SS

On request also available
in other materials



pg 118-119

Magnetic
System

260M-FG

Catena curvilinea / Sideflexing belt/chain / Kurvengängige Mattenkette



Part	Article-Nr.	Ref.	A	Weight LFA
1154	11540103	260M-FG K330	83,8	1,50
1154	11540105	260M-FG K450	114,3	1,65

New

* Material

01 LFA - Acetal Resin



Max w. load: 2000 N/m
Sideflex radius: 500 mm
Pin material: Ferritic SS

03 MX - PBT



Max w. load: 1600 N/m
Sideflex radius: 500 mm
Pin material: Ferritic SS




08 MK

Super Performance Acetal









Max w. load: 1950 N/m
Sideflex radius: 500 mm
Pin material: Ferritic SS

On request also available
in other materials



pg 118-119

Magnetic
System

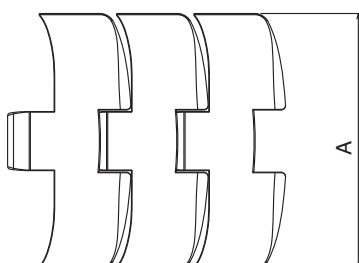

260TAB

Catena curvilinea / Sideflexing belt/chain / Kurvengängige Mattenkette

Part	Article-Nr.	Ref.	A	Weight LFA
1152	11520103	260TAB K330	83,8	1,85
1152	11520105	260TAB K450	114,3	2,00

* Material

01 LFA - Acetal Resin



Max w. load: 2000 N/m
Sideflex radius: 500 mm
Pin material: Martensitic SS

03 MX - PBT



Max w. load: 1600 N/m
Sideflex radius: 500 mm
Pin material: Martensitic SS

08 MK

Super Performance Acetal



Max w. load: 1950 N/m
Sideflex radius: 500 mm
Pin material: Martensitic SS

On request also available
in other materials



Tab System

261M

Catena curvilinea / Sideflexing belt/chain / Kurvengängige Mattenkette

Part	Article-Nr.	Ref.	A	Weight LFA
1153	11530103	261M K330	83,8	2,10
1153	11530105	261M K450	114,3	2,26

New

* Material

01 LFA - Acetal Resin



Max w. load: 2200 N/m
Sideflex radius: 500 mm
Pin material: Ferritic SS

03 MX - PBT



Max w. load: 1750 N/m
Sideflex radius: 500 mm
Pin material: Ferritic SS

08 MK

Super Performance Acetal



Max w. load: 2150 N/m
Sideflex radius: 500 mm
Pin material: Ferritic SS

On request also available
in other materials



Magnetic System