

Curve

Tipologia di curve 1) Magnetiche - 2) Tab - 3) Bevel

Caratteristiche delle curve magnetiche La curva magnetica rappresenta il sistema più efficace ed affidabile per trasportatori con catene a cerniera. Le nostre curve magnetiche sono prodotte da lastre di UHMW-PE di elevata qualità con magneti permanenti alloggiati all'interno della lastra. I magneti mantengono la catena nella via tracciata in curva garantendo la planarità della superficie di trasporto della catena, migliorando la stabilità del prodotto trasportato.

Vantaggi - Igiene: La catena sulla via di scorrimento in curva può essere facilmente sollevata per consentire più facilmente pulizia e manutenzione.

Intercambiabilità: Catene in plastica e in acciaio possono essere utilizzate sulle nostre curve semplificando progetto/realizzazione del trasportatore e consentendo di ridurre scorte di ricambi a magazzino. **Materiali:** La parte superiore delle nostre curve è ottenuta da UHMW-PE di elevata qualità che consente una più lunga durata di catene e delle stesse curve. **Attrito:** I magneti vengono accuratamente selezionati e posizionati per garantire il campo magnetico più idoneo al mantenimento della catena nella sede. Un campo magnetico troppo elevato aumenta l'attrito e riduce la durata di curva e catena.

Corner Tracks

Types of Corner Track 1) Magnetic - 2) Tab - 3) Bevel

Characteristics of Magnetic Corner Tracks The magnetic corner track is the most effective and reliable system for the table top conveyor design. Our magnetic corner tracks are made of high quality UHMW-PE with permanent magnets embedded in the curve. The magnets hold the chain on the corner track and this provides a flat carrying surface for the chain; thus, improving product stability and support for the conveyor.

Benefits - Hygiene: Chains on the magnetic corner tracks can be easily lifted such that it is easier for cleaning and maintenance. **Inter-changeable:** Plastic and SS chains can be used on the curve thus reducing inventory and simpler conveyor design. **Materials:** The upper track of the corner tracks uses high quality UHMW-PE which gives a longer wear life for both the chain and the curve. **Magnetic Force:** Magnets are carefully selected and positioned to provide the correct magnetic field which is just sufficient to keep the chain down. Too high magnetic force will increase the frictional force and reduces wear life of both chains and curve.

Kurvenführungen

Typen 1) Magnet - 2) TAB - 3) Schwalbenschanz

Charakteristik der Magnet-Kurvenführung Die Magnet-Kurvenführung ist das effektivste und bewährteste System für Transporteure mit Scharnierbandketten. Unsere Magnetkurven sind aus hochwertigem UHMW-PE mit permanenten in die Führung eingebetteten Magneten ausgeführt. Die Magnete halten die Scharnierbandkette in der Führung und dies resultiert in einem ruhigen Lauf der Kette, damit wird eine bessere Produktstabilität erreicht.

Vorteile - Hygiene: zur Reinigung können die Scharnierband-Ketten einfach, ohne großen Aufwand, aus der Führung herausgenommen werden. Dies erspart Zeit und Stillstandszeiten. **Flexibilität:** Kunststoff- als auch Edelstahl-Scharnierband-Ketten können mit dieser Kurvenführung verwendet werden, dies vereinfacht die Konstruktion des Transporteurs und reduziert die Lagerhaltung. **Materialien:** Das Oberteil der Magnetkurve ist aus hochwertigem UHMW-PE gefertigt und bietet eine längere Standzeit nicht nur für die Führung sondern auch für die Scharnierbandkette. **Magnetkraft:** Die Magnete sind so angeordnet, und ausgewählt, um ein homogenes und konstantes Magnetfeld zu erzeugen um ein ruhiges und ruck freies Laufen der Kette zu gewährleisten.

Curve Magnetiche Magnetic Curves Magnet Kurven

Movex-RS 
High Performance Tracks

Movex presenta la nuova curva magnetica **RS** in grado di offrire sensibili miglioramenti in campo applicativo. Il nuovo prodotto è dotato di guide di scorrimento in **BluLub**, un materiale innovativo ad alte prestazioni, additivato con lubrificanti solidi e particolarmente indicato per applicazioni con limitate lubrificazioni o completamente a secco. Le curve magnetiche dotate di inserti in **BluLub** impiegano meno energia, riducono il PV-limite ed il basso coefficiente d'attrito aumenta la stabilità del prodotto nonché la vita operativa di catene e tappeti modulari. Le nuove curve **RS** sono perfettamente intercambiabili con le versioni tradizionali a catalogo.

Movex introduces a new magnetic curve **RS** in order to offer greater conveyor performance. The new product is equipped with wear-strips in **BluLub**, an innovative high-tech material with solid lubricants. **BluLub** contributes to improved PV-properties compared to standard UHMW-PE curves especially in applications with limited lubrication, higher speeds and/or higher loads. Curves **RS** equipped with **BluLub** inserts, need less energy and with the lower coefficient of friction improve the product stability and wear-life of chains and belts. The new **RS** curves are perfectly interchangeable with the traditional versions.



Movex präsentiert die neue Magnetkurve **RS**. Diese bietet eine bessere Performance. Unser neues Produkt hat integrierte Leisten aus **BluLub**, ein innovatives Material für hohe Anforderungen. **BluLub** trägt, im Vergleich zu Standard UHMWPE, dazu bei den PV-Limit zu verbessern. Besonders bei Anwendungen mit verminderter Schmierung, hohen Geschwindigkeiten und/oder hoher Belastung kann die Verwendung von **BluLub** Material eine Lösung sein. Ein weiterer Vorteil unserer Magnetkurven **RS** ist die Verringerung des Energieverbrauchs durch Minimierung der Reibwerte gegenüber Standardkurven. Die extrem niedrige Friktion erhöht die Stabilität des zu transportierenden Produktes und verlängert die Standzeit der Scharnierbandketten/Mattenketten. Unsere Magnetkurve **RS** ist mit allen gängigen Standardkurven aus unserem Katalog kompatibel.

Advantages:

- **Less Noise**
- **Lower Friction**
- **Lower Wear**
- **Less Energy**

Vorteile:


- **geringerer Lärm**
- **niedrigerer Reibwert**
- **geringerer Verschleiß**
- **weniger Energieverbrauch**

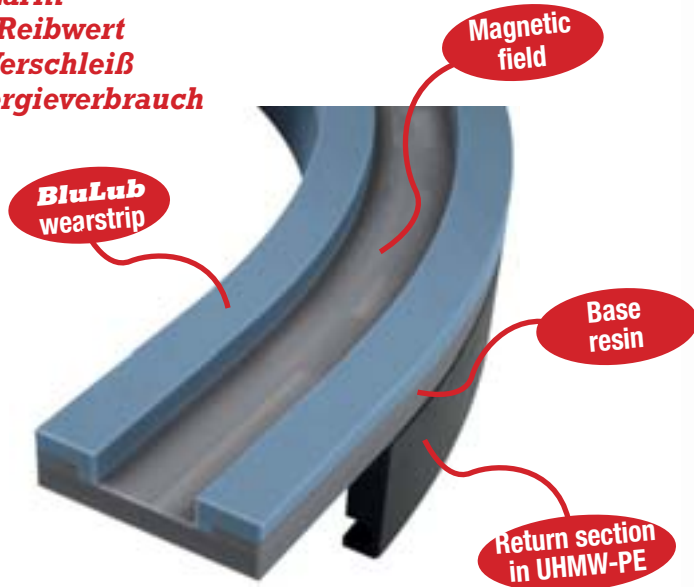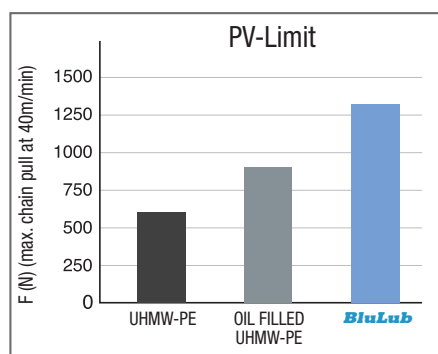

Patent Pending

Available Versions

M6	pag. 52
M7	pag. 53
M10	pag. 54
M8	pag. 56
M42	pag. 57
M9	pag. 58

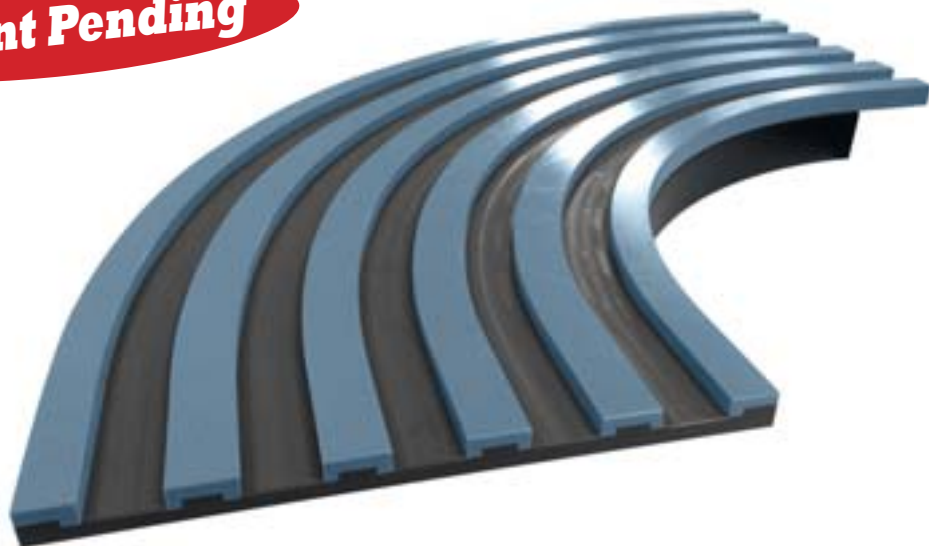

Curve magnetiche / Magnetic curves / Magnet Kurven

880-881 Rm500



pag. 54

880-881 Rm500



pag. 55

880-881 Rm500



pag. 56

880-881 Rm500



pag. 57

880-881 Rm750



pag. 58

880-881 Rm750



pag. 59

880-881 Rm750



pag. 60

880-881 Rm860



pag. 61

880-881
K450 - Rm500



pag. 62

880-881
K450 - Rm610



pag. 63

880-881
K750 - Rm610



pag. 64

880-881
K750 - Rm860/750/1000



pag. 65

882-8857
K750 - Rm610



pag. 66

882-8857
K750 - Rm750



pag. 67

882-8857
K750 - Rm860



pag. 68

882-8857
K750 - Rm1000



pag. 69

882-8857
K1000 - Rm860



pag. 70

882-8857
K1200 - Rm860



pag. 71

LBP 882
K750 - Rm860



pag. 72

LBP 882
K1000 - Rm860



pag. 73

LBP 882
K1200 - Rm860



pag. 74

250M-260M



pag. 75

251M



pag. 76

Curve Tab / Tab curves / Tab Kurven

880-881
K325 - K450 - K750



pag. 77


882
K750 - K1000 - K1200



pag. 78

tab & magnetic corner tracks

Curva Larghezza Base = 100 mm; Passo = 85 mm / Curve Basic Width = 100 mm; Pitch = 85 mm / Kurve Basisbreite = 100 mm; Teilung = 85 mm

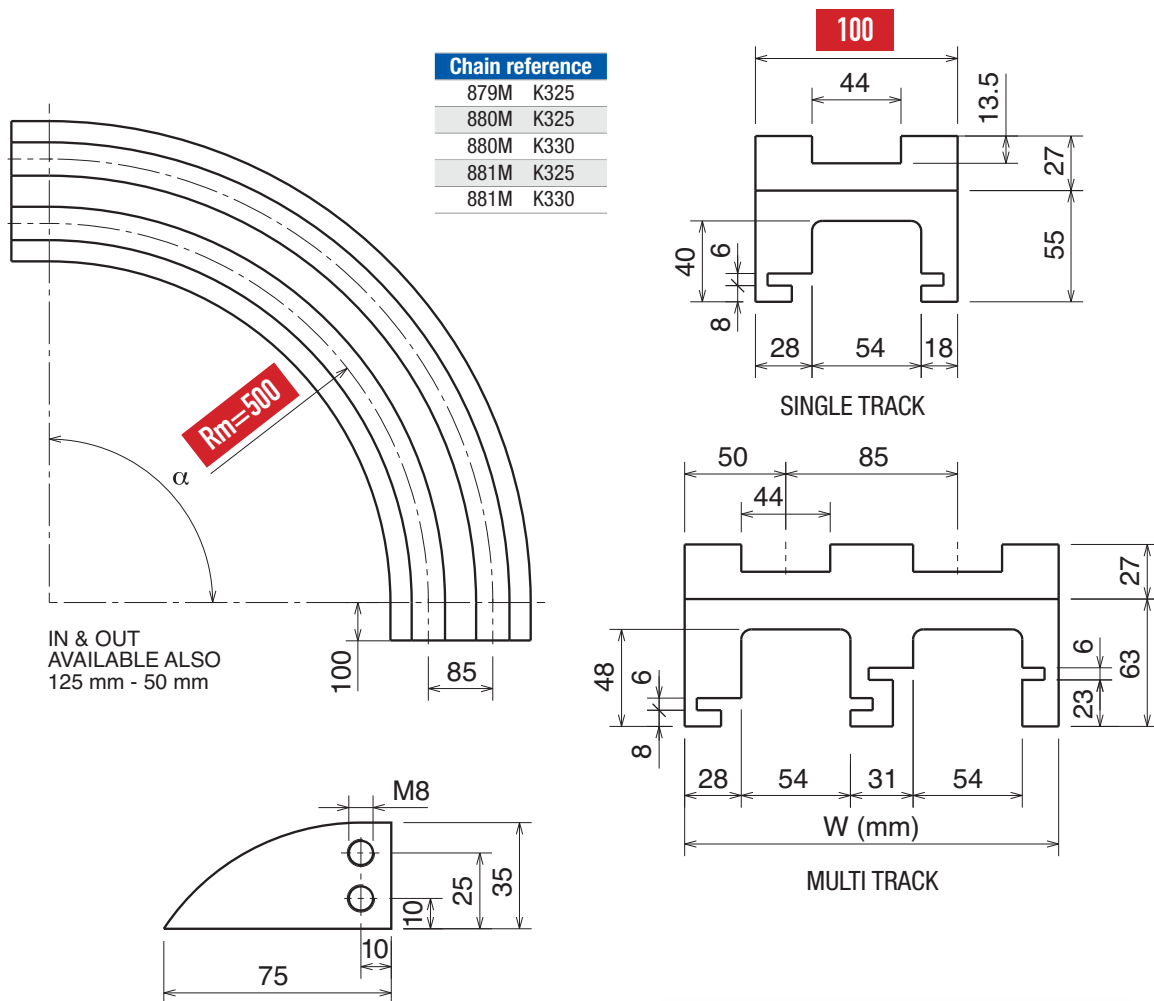

Magnetic System

Upper part available, on request,
also in **BluLub** Movex Enhanced-Performance UHMW-PE
and for abrasive applications.





Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°	Tracks	W
701	70111114	70111214	70111314	70111414	70111514	70111614	1	100
701	70111124	70111224	70111324	70111424	70111524	70111624	2	185
701	70111134	70111234	70111334	70111434	70111534	70111634	3	270
701	70111144	70111244	70111344	70111444	70111544	70111644	4	355
701	70111154	70111254	70111354	70111454	70111554	70111654	5	440
701	70111164	70111264	70111364	70111464	70111564	70111664	6	525
701	70111174	70111274	70111374	70111474	70111574	70111674	7	610
701	70111184	70111284	70111384	70111484	70111584	70111684	8	695

Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°	Tracks	W
701	70111114RS	70111214RS	70111314RS	70111414RS	70111514RS	70111614RS	1	100
701	70111124RS	70111224RS	70111324RS	70111424RS	70111524RS	70111624RS	2	185
701	70111134RS	70111234RS	70111334RS	70111434RS	70111534RS	70111634RS	3	270
701	70111144RS	70111244RS	70111344RS	70111444RS	70111544RS	70111644RS	4	355
701	70111154RS	70111254RS	70111354RS	70111454RS	70111554RS	70111654RS	5	440
701	70111164RS	70111264RS	70111364RS	70111464RS	70111564RS	70111664RS	6	525
701	70111174RS	70111274RS	70111374RS	70111474RS	70111574RS	70111674RS	7	610
701	70111184RS	70111284RS	70111384RS	70111484RS	70111584RS	70111684RS	8	695



Curva Larghezza Base = 100 mm; Passo = 85 mm / Curve Basic Width = 100 mm; Pitch = 85 mm / Kurve Basisbreite = 100 mm; Teilung = 85 mm

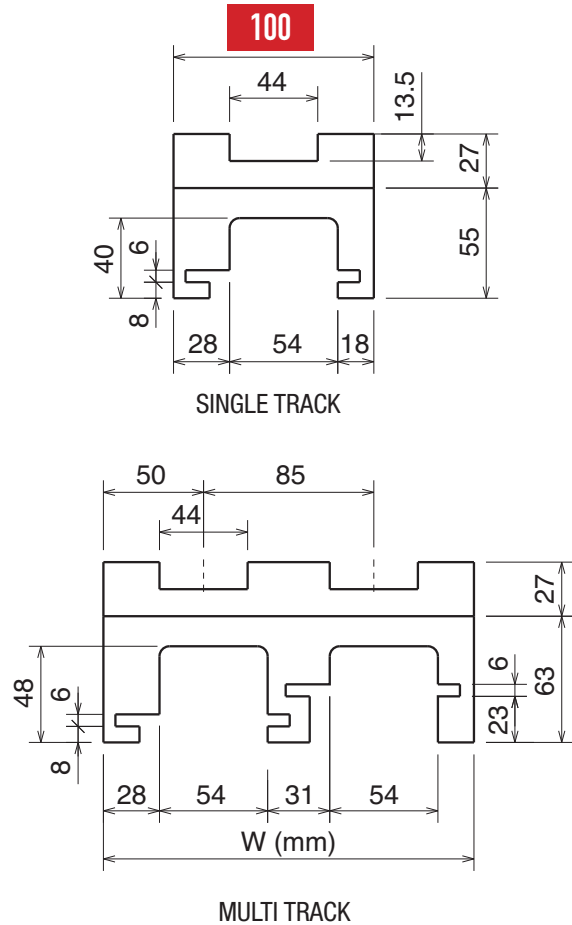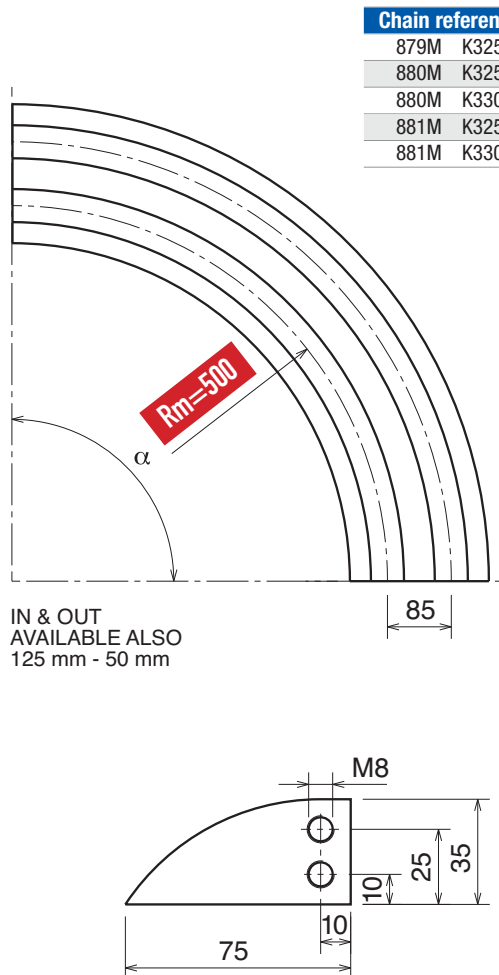

Magnetic System

Upper part available, on request,
also in **BluLub** 
Movex Enhanced-Performance UHMW-PE
and for abrasive applications.




Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°	Tracks	W
701	70111110	70111210	70111310	70111410	70111510	70111610	1	100
701	70111120	70111220	70111320	70111420	70111520	70111620	2	185
701	70111130	70111230	70111330	70111430	70111530	70111630	3	270
701	70111140	70111240	70111340	70111440	70111540	70111640	4	355
701	70111150	70111250	70111350	70111450	70111550	70111650	5	440
701	70111160	70111260	70111360	70111460	70111560	70111660	6	525
701	70111170	70111270	70111370	70111470	70111570	70111670	7	610
701	70111180	70111280	70111380	70111480	70111580	70111680	8	695



Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°	Tracks	W
701	70111110RS	70111210RS	70111310RS	70111410RS	70111510RS	70111610RS	1	100
701	70111120RS	70111220RS	70111320RS	70111420RS	70111520RS	70111620RS	2	185
701	70111130RS	70111230RS	70111330RS	70111430RS	70111530RS	70111630RS	3	270
701	70111140RS	70111240RS	70111340RS	70111440RS	70111540RS	70111640RS	4	355
701	70111150RS	70111250RS	70111350RS	70111450RS	70111550RS	70111650RS	5	440
701	70111160RS	70111260RS	70111360RS	70111460RS	70111560RS	70111660RS	6	525
701	70111170RS	70111270RS	70111370RS	70111470RS	70111570RS	70111670RS	7	610
701	70111180RS	70111280RS	70111380RS	70111480RS	70111580RS	70111680RS	8	695

Curva Larghezza Base = 110 mm; Passo = 85 mm / Curve Basic Width = 110 mm; Pitch = 85 mm / Kurve Basisbreite = 110 mm; Teilung = 85 mm

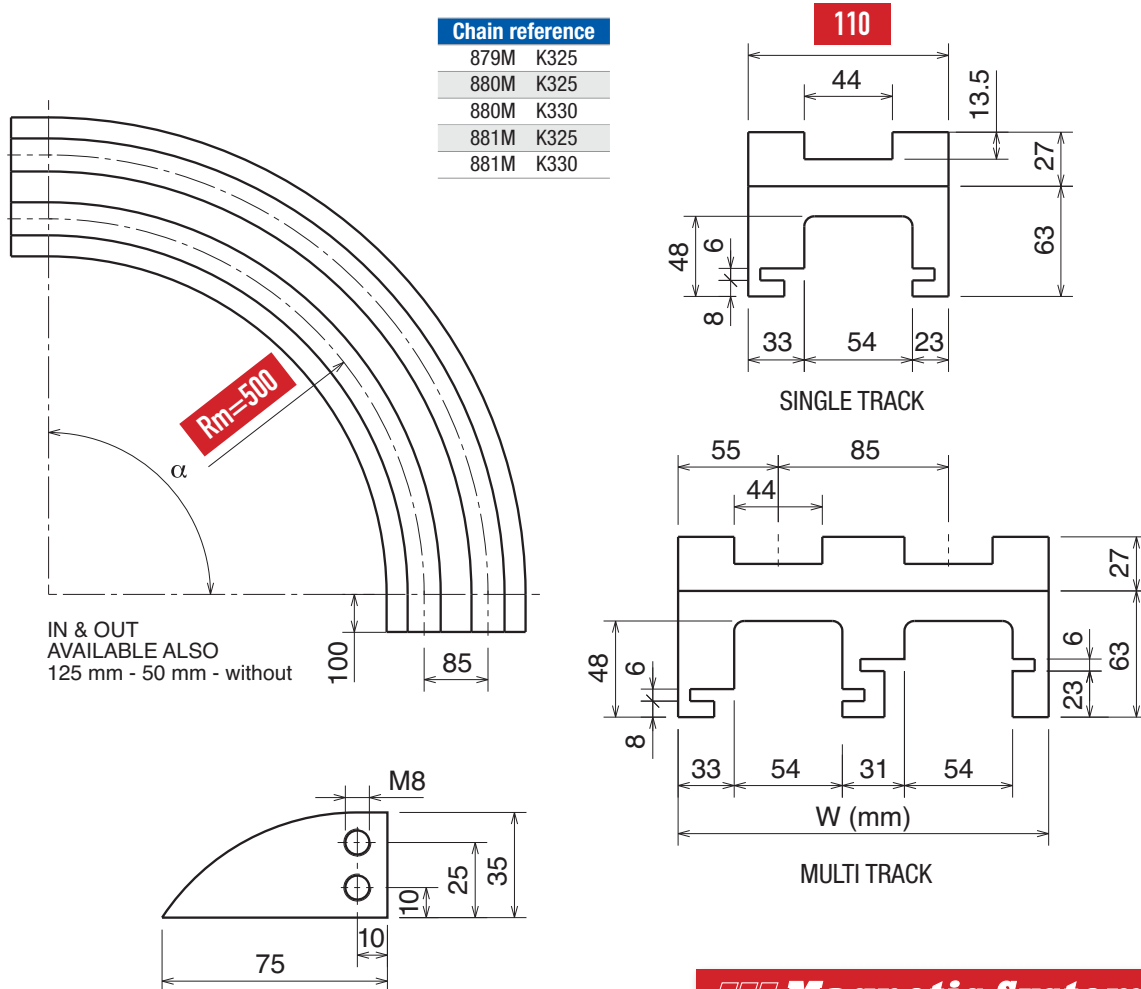


Magnetic System

Upper part available, on request,
also in **BluLub** Movex Enhanced-Performance UHMW-PE
and for abrasive applications.




Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°	Tracks	W
711	71111114	71111214	71111314	71111414	71111514	71111614	1	110
711	71111124	71111224	71111324	71111424	71111524	71111624	2	195
711	71111134	71111234	71111334	71111434	71111534	71111634	3	280
711	71111144	71111244	71111344	71111444	71111544	71111644	4	365
711	71111154	71111254	71111354	71111454	71111554	71111654	5	450
711	71111164	71111264	71111364	71111464	71111564	71111664	6	535
711	71111174	71111274	71111374	71111474	71111574	71111674	7	620
711	71111184	71111284	71111384	71111484	71111584	71111684	8	705

Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°	Tracks	W
711	71111114RS	71111214RS	71111314RS	71111414RS	71111514RS	71111614RS	1	110
711	71111124RS	71111224RS	71111324RS	71111424RS	71111524RS	71111624RS	2	195
711	71111134RS	71111234RS	71111334RS	71111434RS	71111534RS	71111634RS	3	280
711	71111144RS	71111244RS	71111344RS	71111444RS	71111544RS	71111644RS	4	365
711	71111154RS	71111254RS	71111354RS	71111454RS	71111554RS	71111654RS	5	450
711	71111164RS	71111264RS	71111364RS	71111464RS	71111564RS	71111664RS	6	535
711	71111174RS	71111274RS	71111374RS	71111474RS	71111574RS	71111674RS	7	620
711	71111184RS	71111284RS	71111384RS	71111484RS	71111584RS	71111684RS	8	705



Curva Larghezza Base = 111 mm; Passo = 85 mm / Curve Basic Width = 111 mm; Pitch = 85 mm / Kurve Basisbreite = 111 mm; Teilung = 85 mm

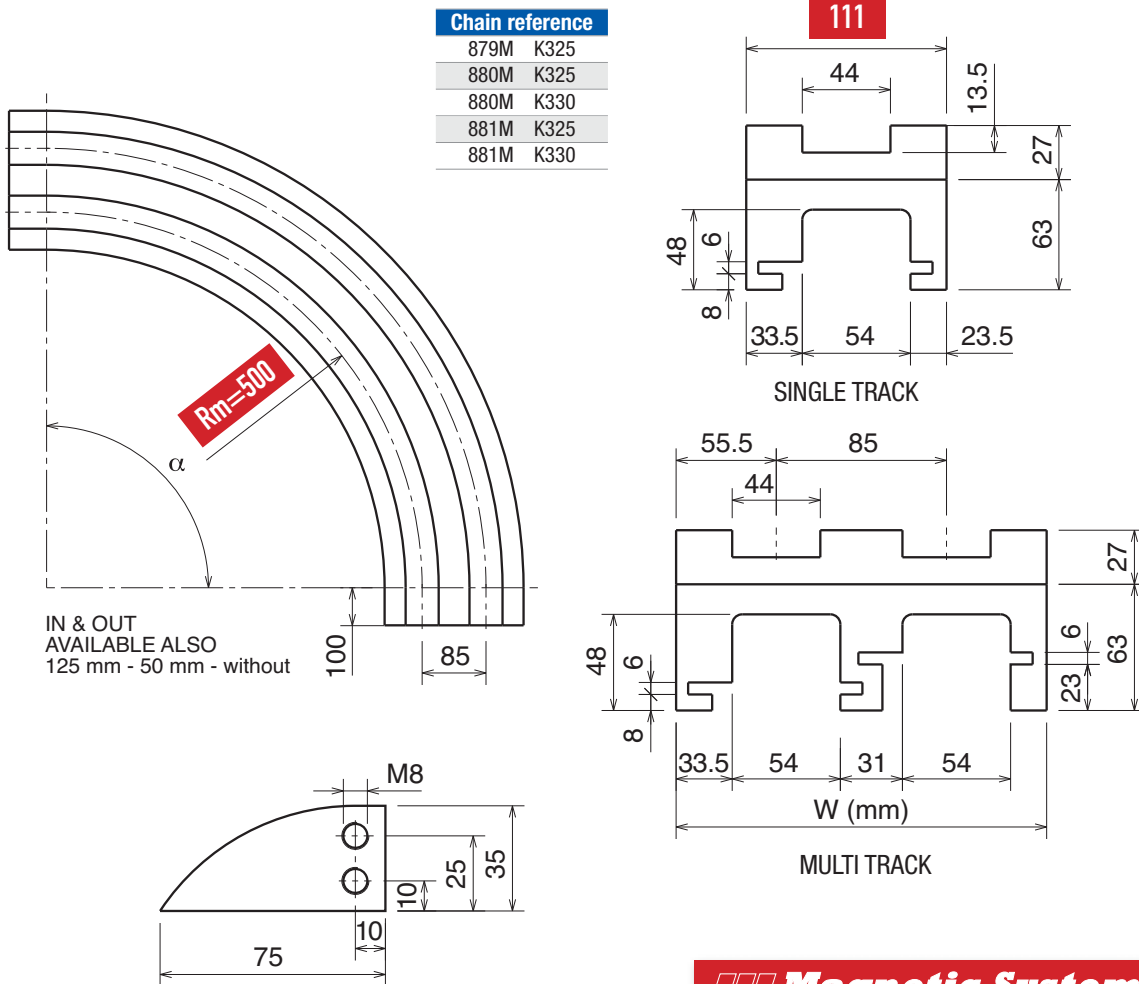

Magnetic System

Upper part available, on request,
also in **BluLub** 
Movex Enhanced-Performance UHMW-PE
and for abrasive applications.




Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°	Tracks	W
712	71211114	71211214	71211314	71211414	71211514	71211614	1	111
712	71211124	71211224	71211324	71211424	71211524	71211624	2	196
712	71211134	71211234	71211334	71211434	71211534	71211634	3	281
712	71211144	71211244	71211344	71211444	71211544	71211644	4	366
712	71211154	71211254	71211354	71211454	71211554	71211654	5	451
712	71211164	71211264	71211364	71211464	71211564	71211664	6	536
712	71211174	71211274	71211374	71211474	71211574	71211674	7	621
712	71211184	71211284	71211384	71211484	71211584	71211684	8	706



Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°	Tracks	W
712	7121114RS	71211214RS	71211314RS	71211414RS	71211514RS	71211614RS	1	111
712	71211124RS	71211224RS	71211324RS	71211424RS	71211524RS	71211624RS	2	196
712	71211134RS	71211234RS	71211334RS	71211434RS	71211534RS	71211634RS	3	281
712	71211144RS	71211244RS	71211344RS	71211444RS	71211544RS	71211644RS	4	366
712	71211154RS	71211254RS	71211354RS	71211454RS	71211554RS	71211654RS	5	451
712	71211164RS	71211264RS	71211364RS	71211464RS	71211564RS	71211664RS	6	536
712	71211174RS	71211274RS	71211374RS	71211474RS	71211574RS	71211674RS	7	621
712	71211184RS	71211284RS	71211384RS	71211484RS	71211584RS	71211684RS	8	706

Curva Larghezza Base = 100 mm; Passo = 85 mm / Curve Basic Width = 100 mm; Pitch = 85 mm / Kurve Basisbreite = 100 mm; Teilung = 85 mm

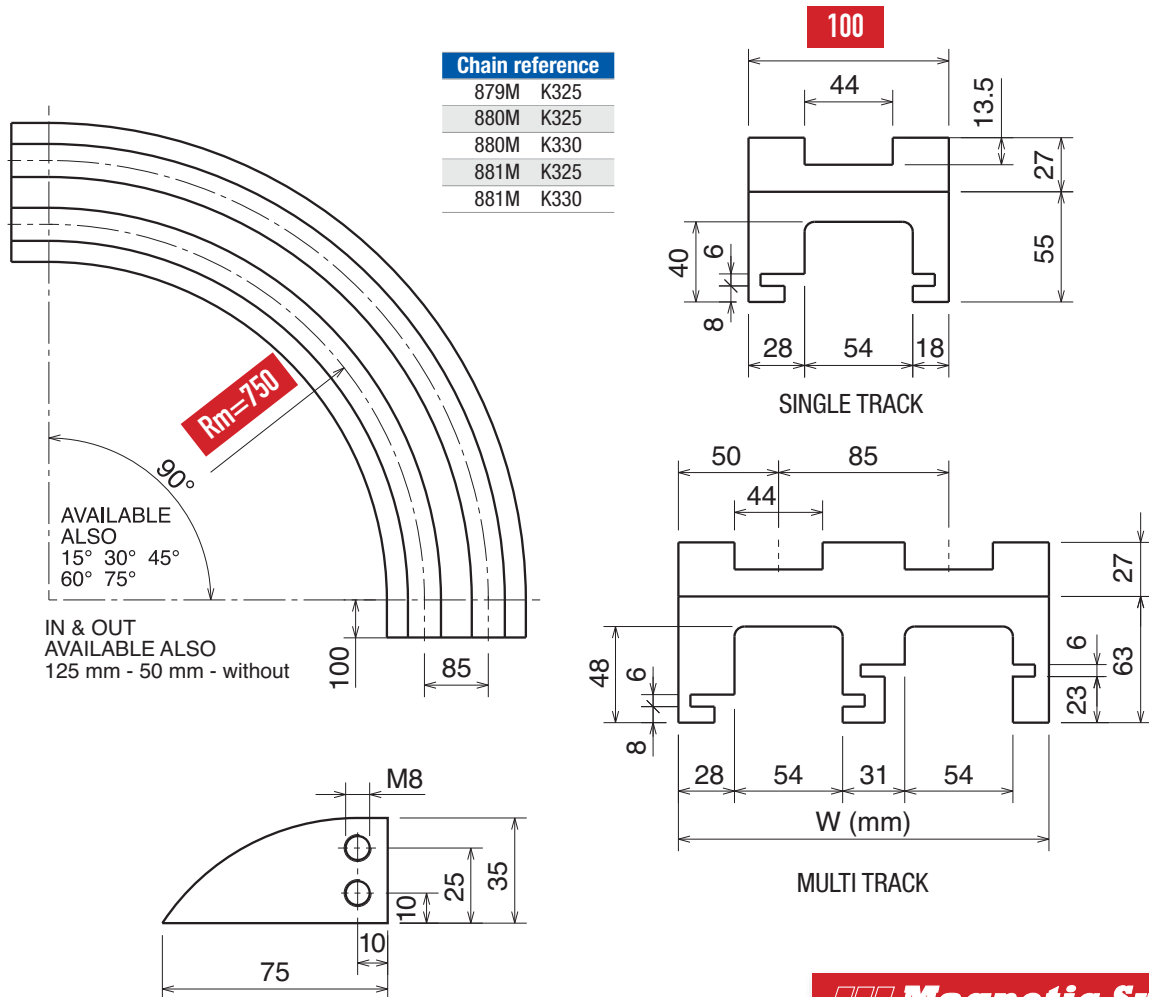

Magnetic System


Upper part available, on request,
also in **BluLub** 
Movex Enhanced-Performance UHMW-PE
and for abrasive applications.



Part	Article-Nr.	Tracks	W
702	70216614	1	100
702	70216624	2	185
702	70216634	3	270
702	70216644	4	355
702	70216654	5	440
702	70216664	6	525
702	70216674	7	610
702	70216684	8	695

Part	Article-Nr.	Tracks	W
702	70216614RS	1	100
702	70216624RS	2	185
702	70216634RS	3	270
702	70216644RS	4	355
702	70216654RS	5	440
702	70216664RS	6	525
702	70216674RS	7	610
702	70216684RS	8	695

Curva Larghezza Base = 111 mm; Passo = 85 mm / Curve Basic Width = 111 mm; Pitch = 85 mm / Kurve Basisbreite = 111 mm; Teilung = 85 mm

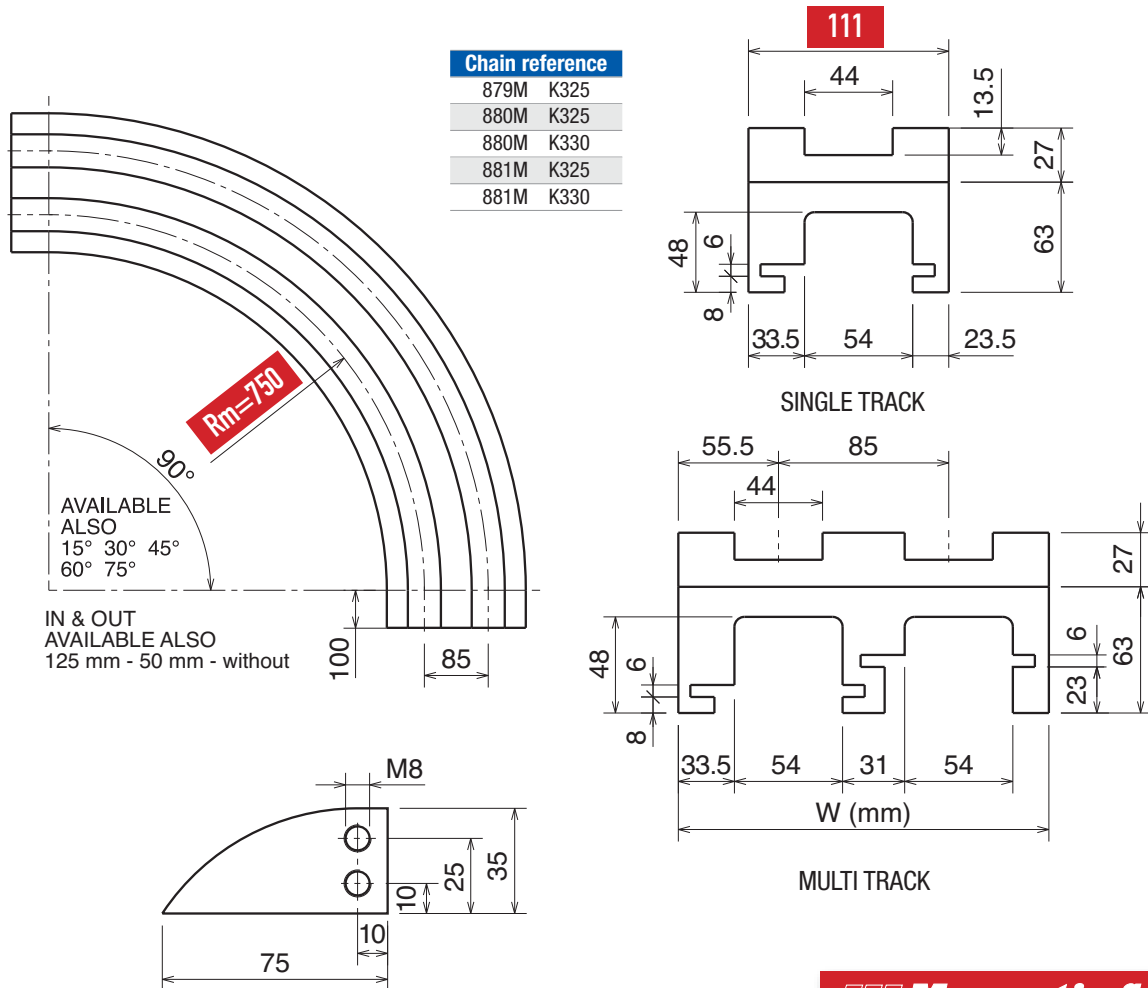

Magnetic System


Upper part available, on request,
also in **BluLub** 
and for abrasive applications.



Part	Article-Nr.	Tracks	W
713	71316614	1	111
713	71316624	2	196
713	71316634	3	281
713	71316644	4	366
713	71316654	5	451
713	71316664	6	536
713	71316674	7	621
713	71316684	8	706

Part	Article-Nr.	Tracks	W
713	71316614RS	1	111
713	71316624RS	2	196
713	71316634RS	3	281
713	71316644RS	4	366
713	71316654RS	5	451
713	71316664RS	6	536
713	71316674RS	7	621
713	71316684RS	8	706

Curva Larghezza Base = 110 mm; Passo = 90 mm / Curve Basic Width = 110 mm; Pitch = 90 mm / Kurve Basisbreite = 110 mm; Teilung = 90 mm

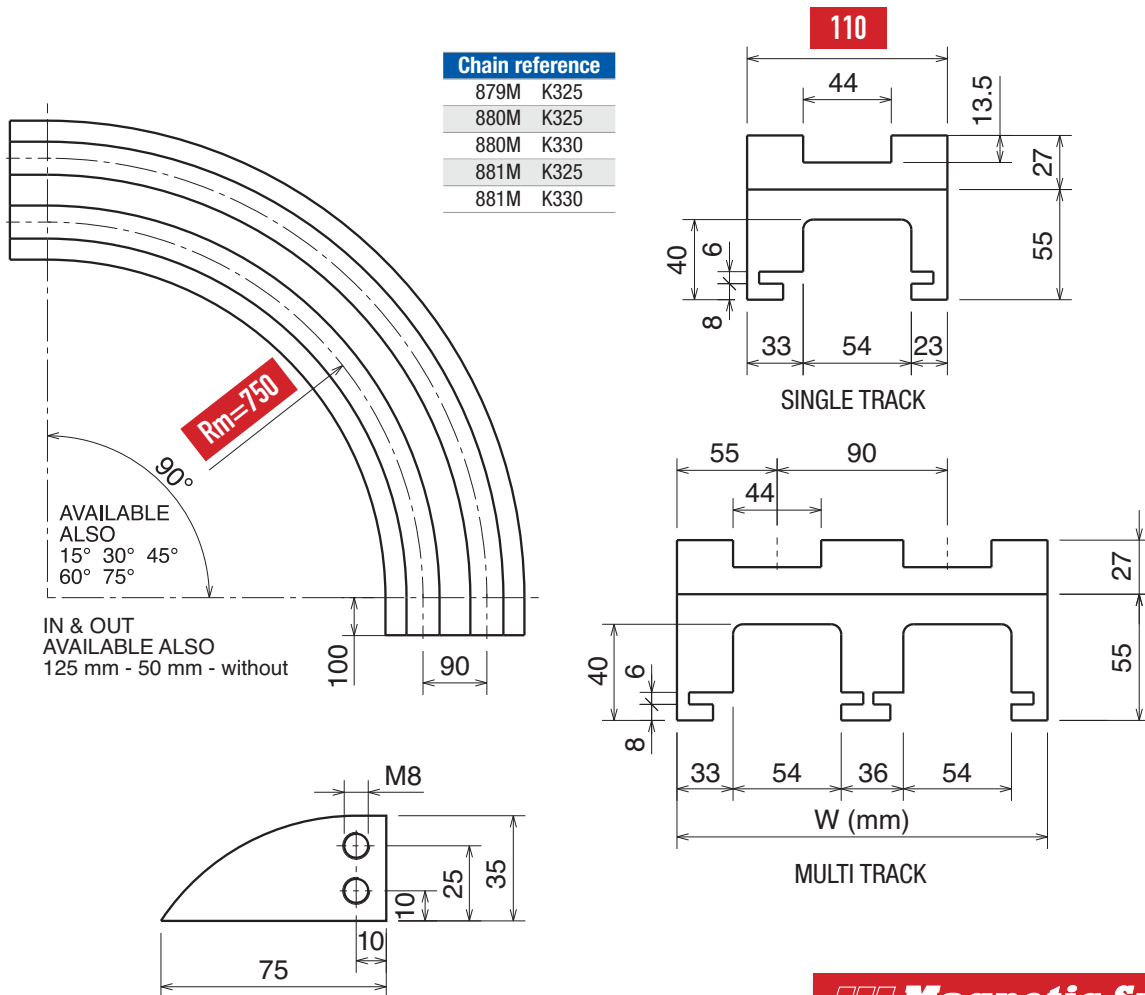

Magnetic System

Upper part available, on request,
also in **BluLub** 
Movex Enhanced-Performance UHMW-PE
and for abrasive applications.






Part	Article-Nr.	Tracks	W
714	71416614	1	110
714	71416624	2	200
714	71416634	3	290
714	71416644	4	380
714	71416654	5	470
714	71416664	6	560
714	71416674	7	650
714	71416684	8	740

Part	Article-Nr.	Tracks	W
714	71416614RS	1	110
714	71416624RS	2	200
714	71416634RS	3	290
714	71416644RS	4	380
714	71416654RS	5	470
714	71416664RS	6	560
714	71416674RS	7	650
714	71416684RS	8	740

Materiale:	Material:	Materialien:
Polietilene UHMW-PE	Polyethylene UHMW-PE	Polyäthylen UHMW-PE

Curva Larghezza Base = 100 mm; Passo = 85 mm / Curve Basic Width = 100 mm; Pitch = 85 mm / Kurve Basisbreite = 100 mm; Teilung = 85 mm

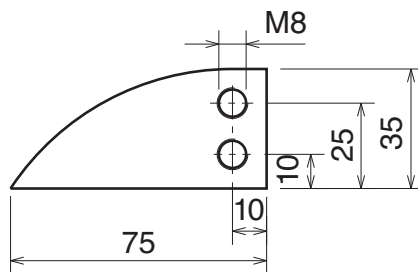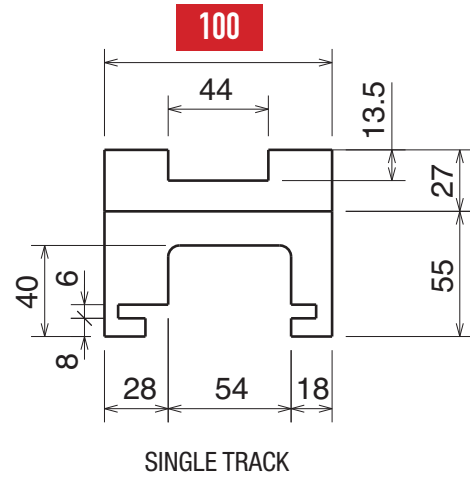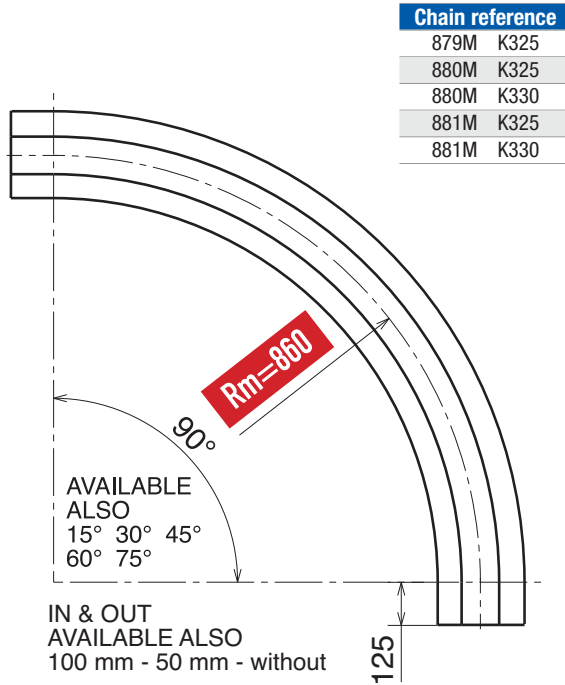

Magnetic System

Upper part available, on request,
also in **BluLub** 
Movex Enhanced-Performance UHMW-PE
and for abrasive applications.




Part	Article-Nr.	Tracks	W
703	70318615	1	100

Part	Article-Nr.	Tracks	W
703	70318615RS	1	100




Curva Larghezza Base = 129 mm; Passo = 120 mm / Curve Basic Width = 129 mm; Pitch = 120 mm / Kurve Basisbreite = 129 mm; Teilung = 120 mm

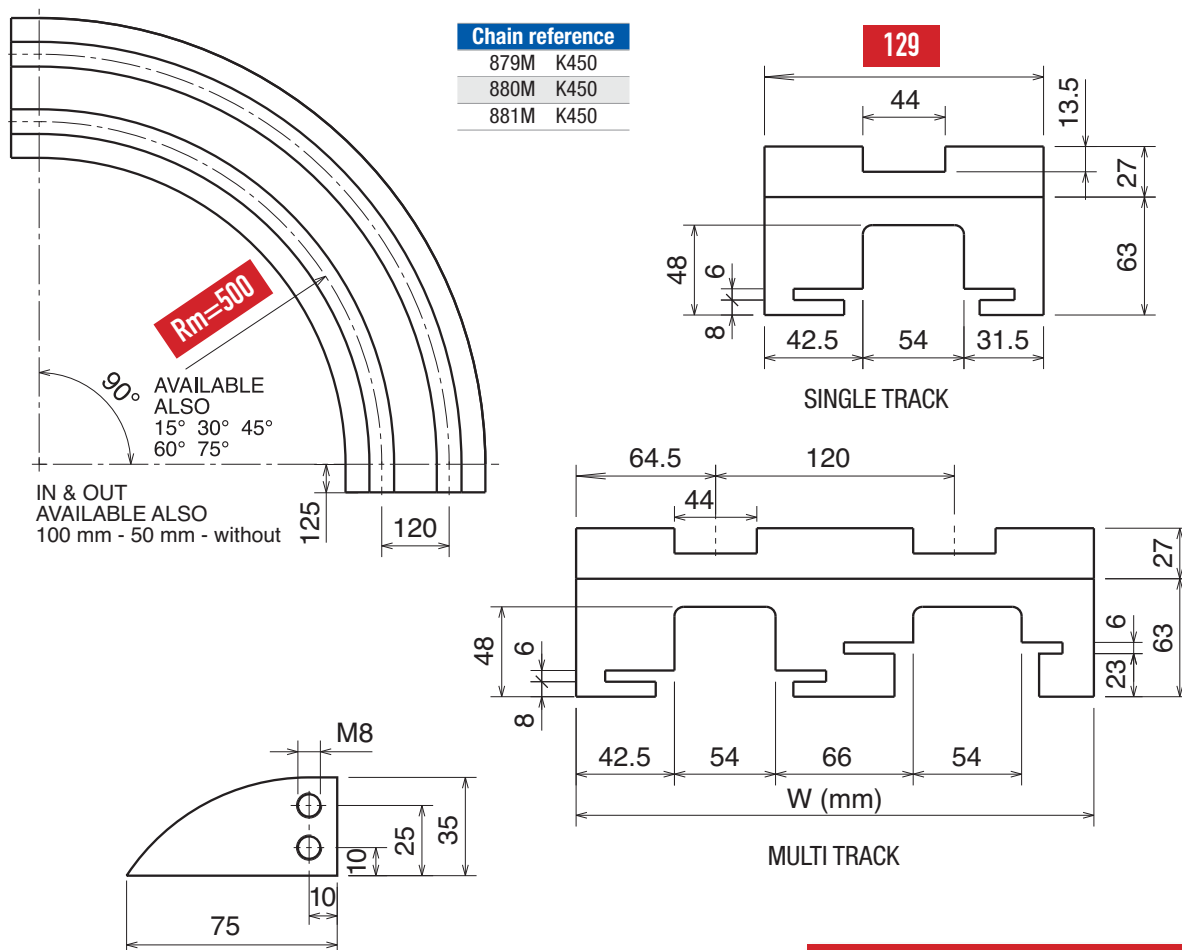

Magnetic System

Upper part available, on request, also in **BluLub** Movex Enhanced-Performance UHMW-PE and for abrasive applications.



RS


Part	Article-Nr.	Tracks	W
715	71511615	1	129
715	71511625	2	249
715	71511635	3	369
715	71511645	4	489
715	71511655	5	609

Part	Article-Nr.	Tracks	W
715	71511615RS	1	129
715	71511625RS	2	249
715	71511635RS	3	369
715	71511645RS	4	489
715	71511655RS	5	609

Materiale:	Material:	Materialien:
Polietilene UHMW-PE	Polyethylene UHMW-PE	Polyäthylen UHMW-PE


M22A Series 880-881 K450

Curva Larghezza Base = 129 mm; Passo = 120 mm / Curve Basic Width = 129 mm; Pitch = 120 mm / Kurve Basisbreite = 129 mm; Teilung = 120 mm

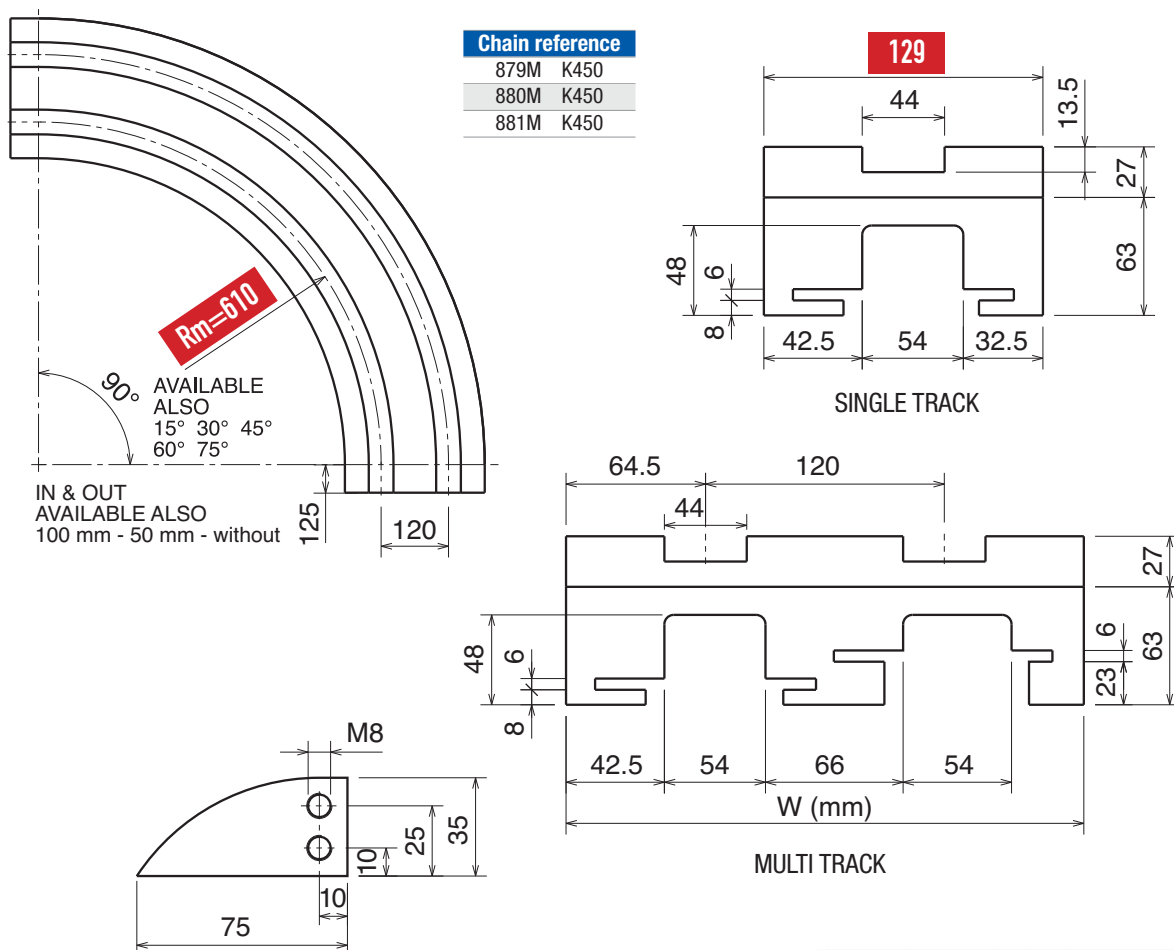

Magnetic System

Upper part available, on request, also in **BluLub**  and for abrasive applications.




RS 

Part	Article-Nr.	Tracks	W
704	70413615	1	129
704	70413625	2	249
704	70413635	3	369
704	70413645	4	489
704	70413655	5	609

Part	Article-Nr.	Tracks	W
704	70413615RS	1	129
704	70413625RS	2	249
704	70413635RS	3	369
704	70413645RS	4	489
704	70413655RS	5	609

Curva Larghezza Base = 214 mm / Curve Basic Width = 214 mm / Kurve Basisbreite = 214 mm

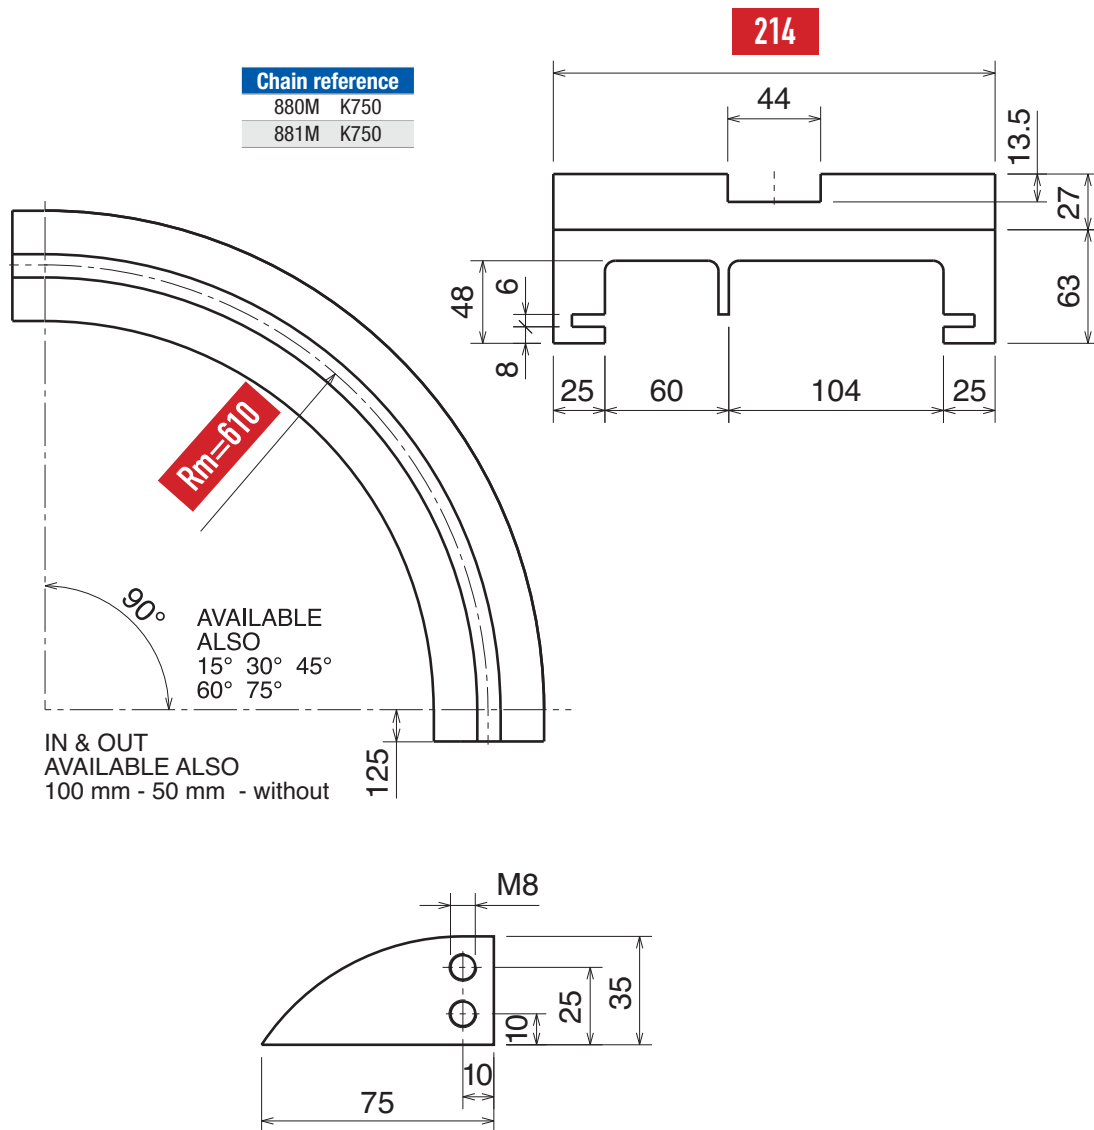

Magnetic System

Part	Article-Nr.	Tracks	W
716	71613615	1	214

Part	Article-Nr.	Tracks	W
716	71613615RS	1	214

Upper part available, on request,
also in **BluLub** 
Movex Enhanced-Performance UHMW-PE
and for abrasive applications.




Materiale:	Material:	Materialien:
Polietilene UHMW-PE	Polyethylene UHMW-PE	Polyäthylen UHMW-PE

	M62 Series	Rm=750
	M66 Series	Rm=860
	M65 Series	Rm=1000

880-881 K750

Curva Larghezza Base = 214 mm / Curve Basic Width = 214 mm / Kurve Basisbreite = 214 mm

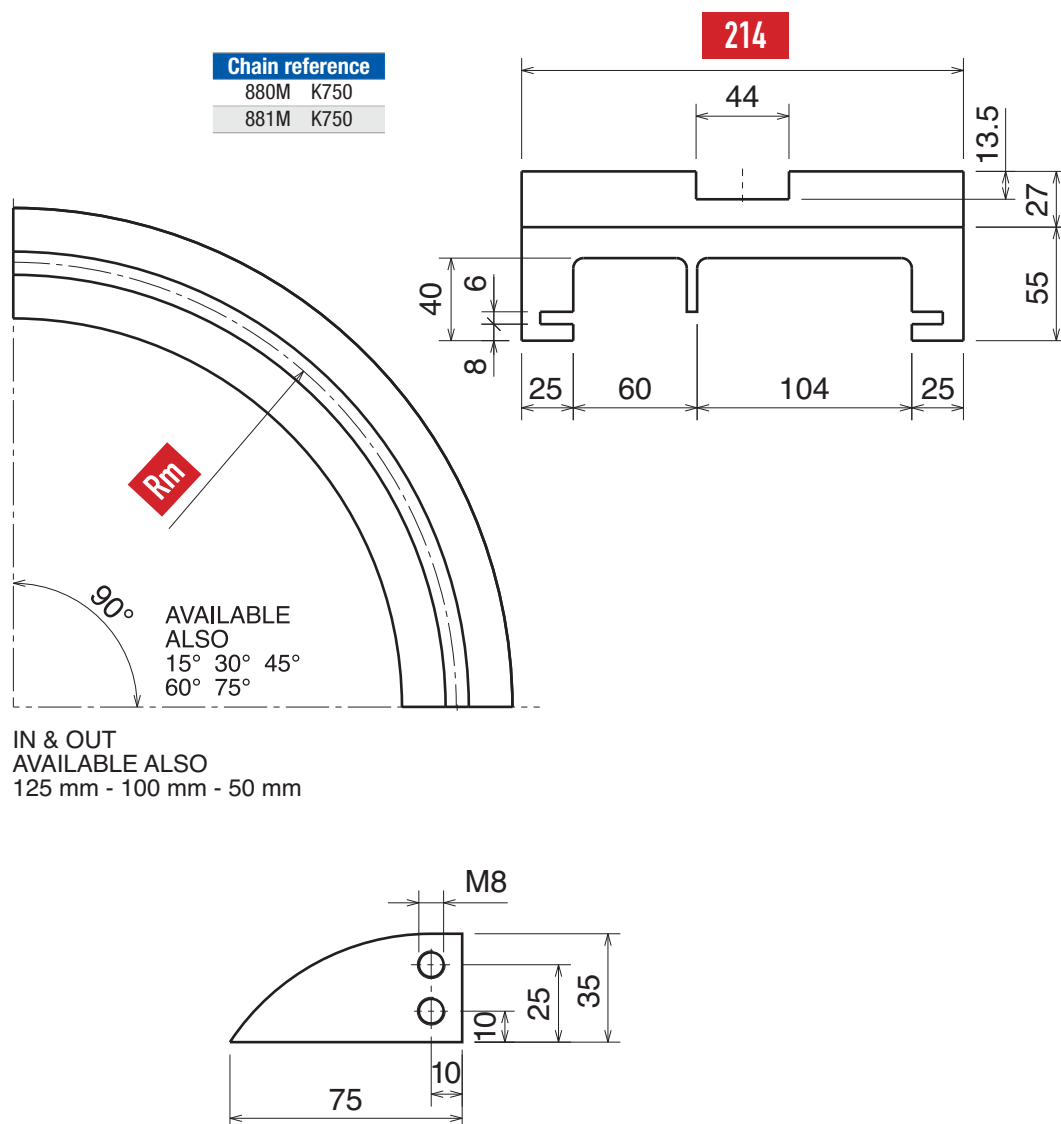

Magnetic System

Upper part available, on request,
also in **BluLub** 
Movex Enhanced-Performance UHMW-PE
and for abrasive applications.




RS 

Part	Article-Nr.	Tracks	W
707	70716610	1	214 750
707	70718610	1	214 860
707	70719610	1	214 1000


Part	Article-Nr.	Tracks	W
707	70716610RS	1	214 750
707	70718610RS	1	214 860
707	70719610RS	1	214 1000

Curva Larghezza Base = 200 mm / Curve Basic Width = 200 mm / Kurve Basisbreite = 200 mm

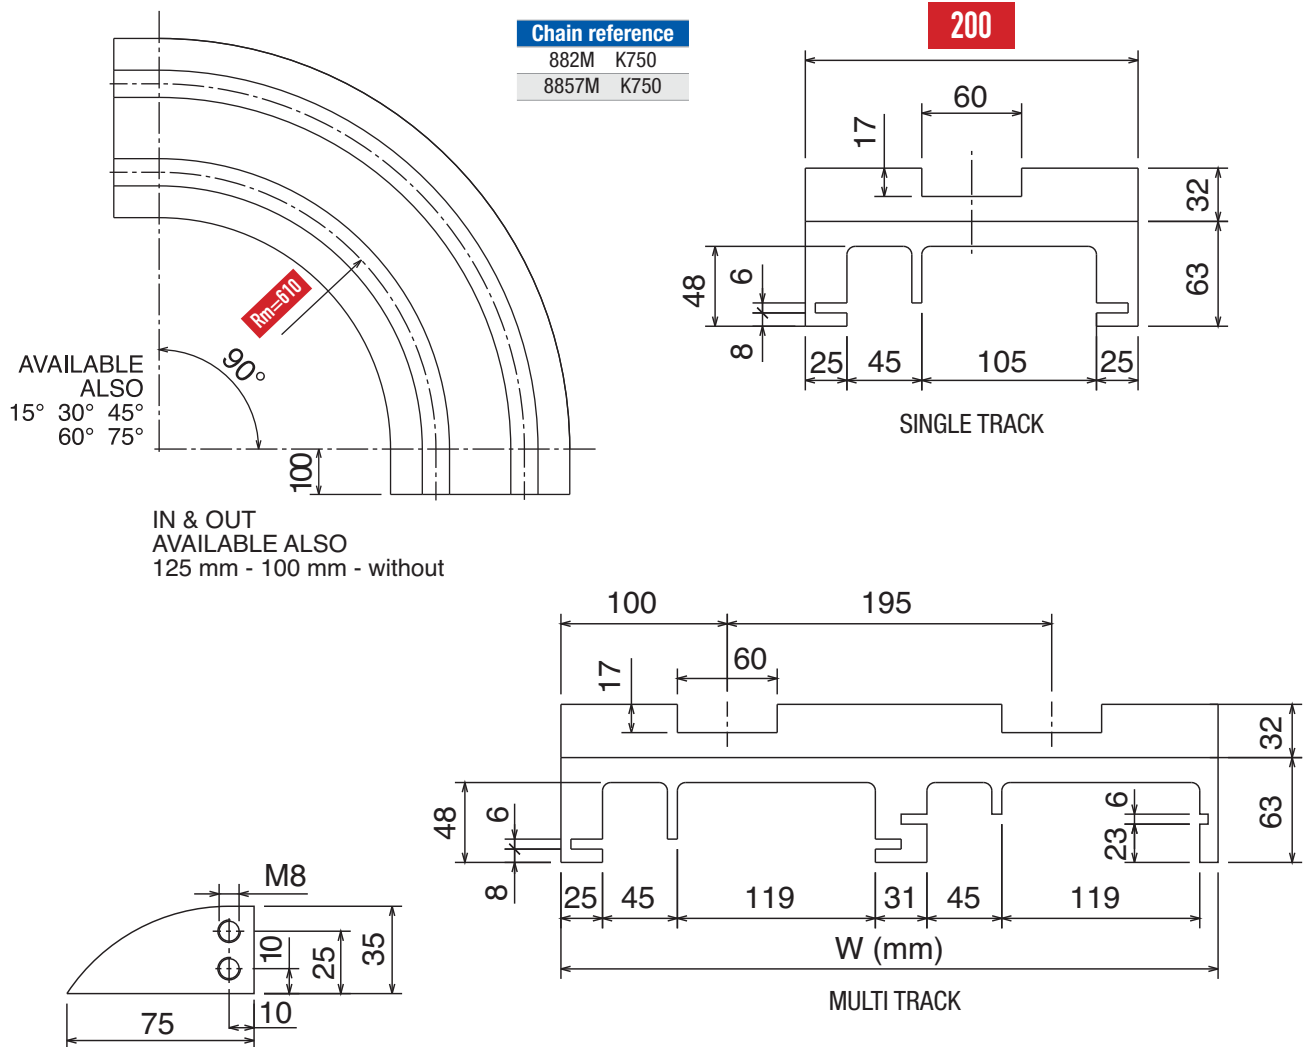

Magnetic System

Upper part available, on request,
also in **BluLub** 
Movex Enhanced-Performance UHMW-PE
and for abrasive applications.




RS 

Part	Article-Nr.	Tracks	W
717	71713614	1	200
717	71713624	2	395
717	71713634	3	590
717	71713644	4	785

Part	Article-Nr.	Tracks	W
717	71713614RS	1	200
717	71713624RS	2	395
717	71713634RS	3	590
717	71713644RS	4	785

Curva Larghezza Base = 200 mm / Curve Basic Width = 200 mm / Kurve Basisbreite = 200 mm

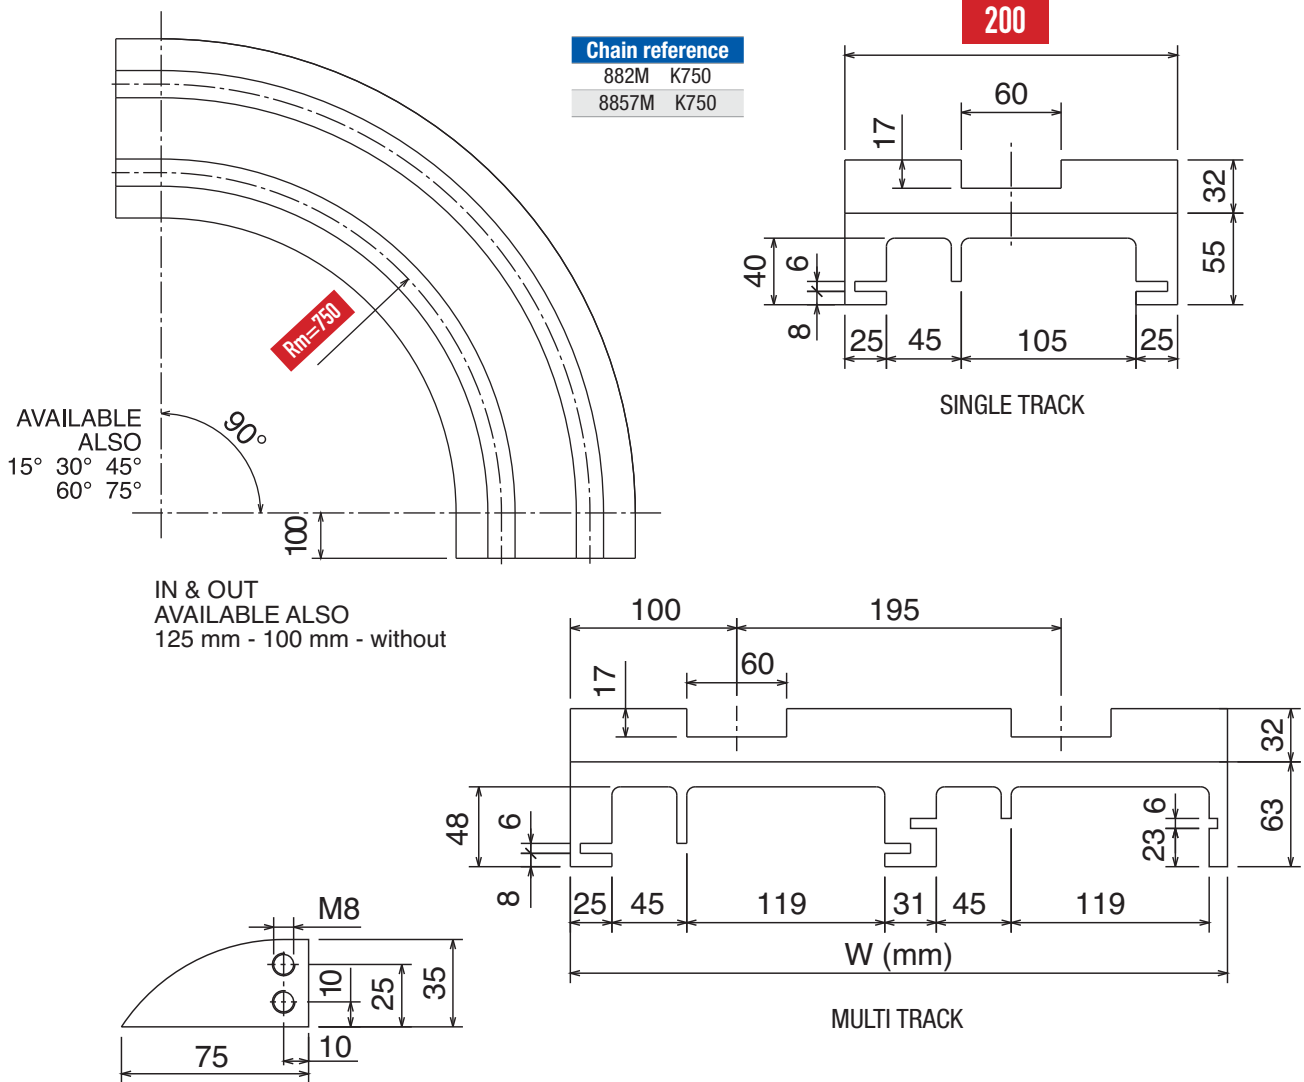

Magnetic System

Upper part available, on request, also in **BluLub**  Movex Enhanced-Performance UHMW-PE and for abrasive applications.




Part	Article-Nr.	Tracks	W
718	71816614	1	200
718	71816624	2	395
718	71816634	3	590

Part	Article-Nr.	Tracks	W
718	71816614RS	1	200
718	71816624RS	2	395
718	71816634RS	3	590


Materiale:	Material:	Materialien:
Polietilene UHMW-PE	Polyethylene UHMW-PE	Polyäthylen UHMW-PE

Curva Larghezza Base = 214 mm; Passo = 200 mm / Curve Basic Width = 214 mm; Pitch = 200 mm / Kurve Basisbreite = 214 mm; Teilung = 200 mm

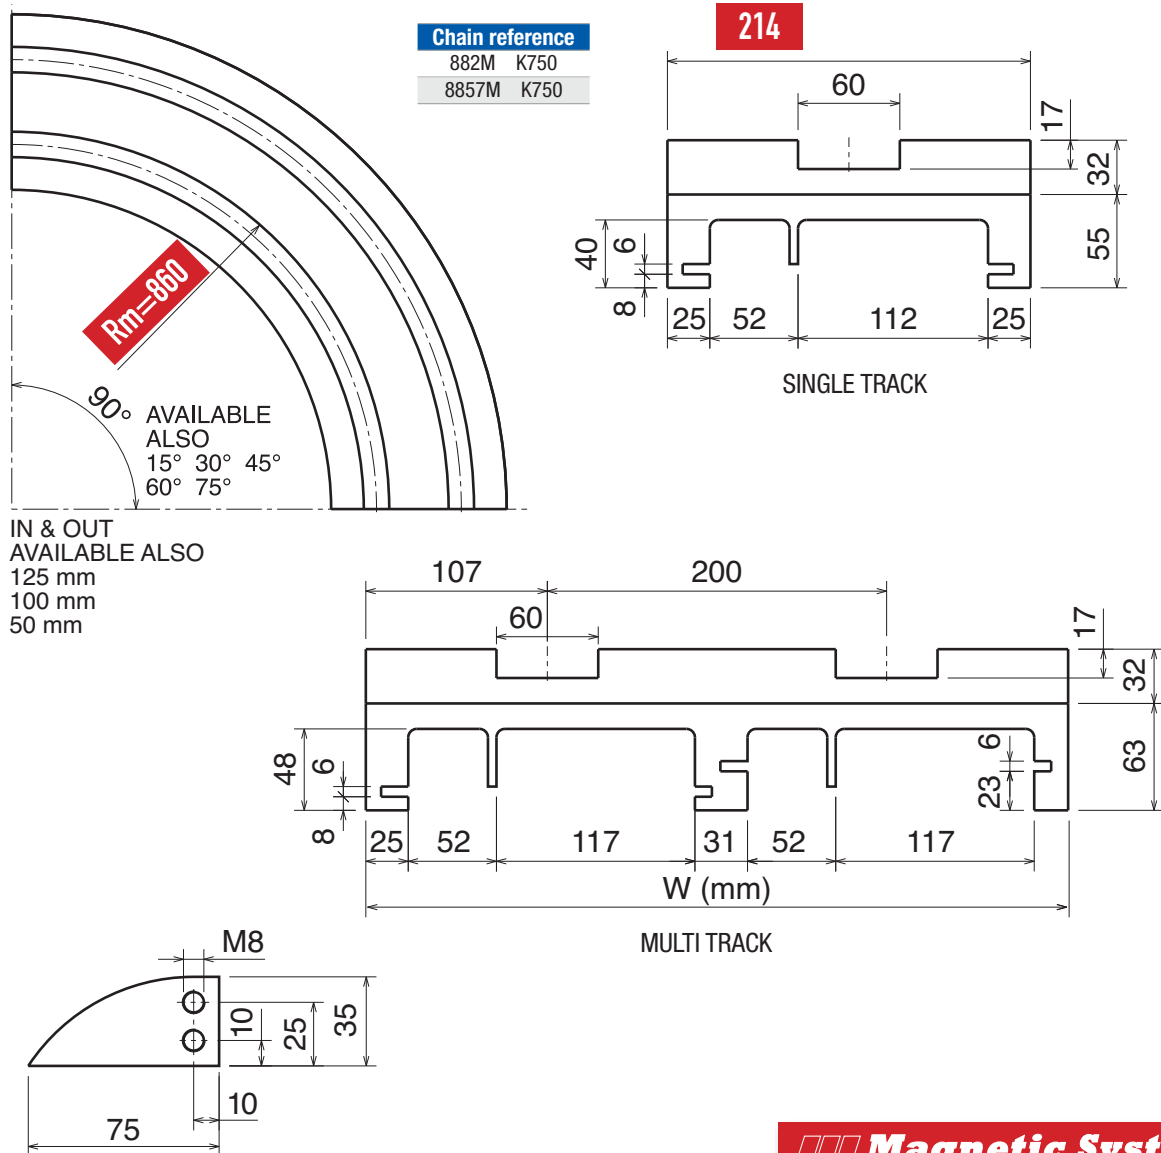

Magnetic System

Upper part available, on request, also in **BluLub** Movex Enhanced-Performance UHMW-PE and for abrasive applications.




RS


Part	Article-Nr.	Tracks	W
708	70818610	1	214
708	70818620	2	410
708	70818630	3	606

Part	Article-Nr.	Tracks	W
708	70818610RS	1	214
708	70818620RS	2	410
708	70818630RS	3	606

Curva Larghezza Base = 200 mm / Curve Basic Width = 200 mm / Kurve Basisbreite = 200 mm

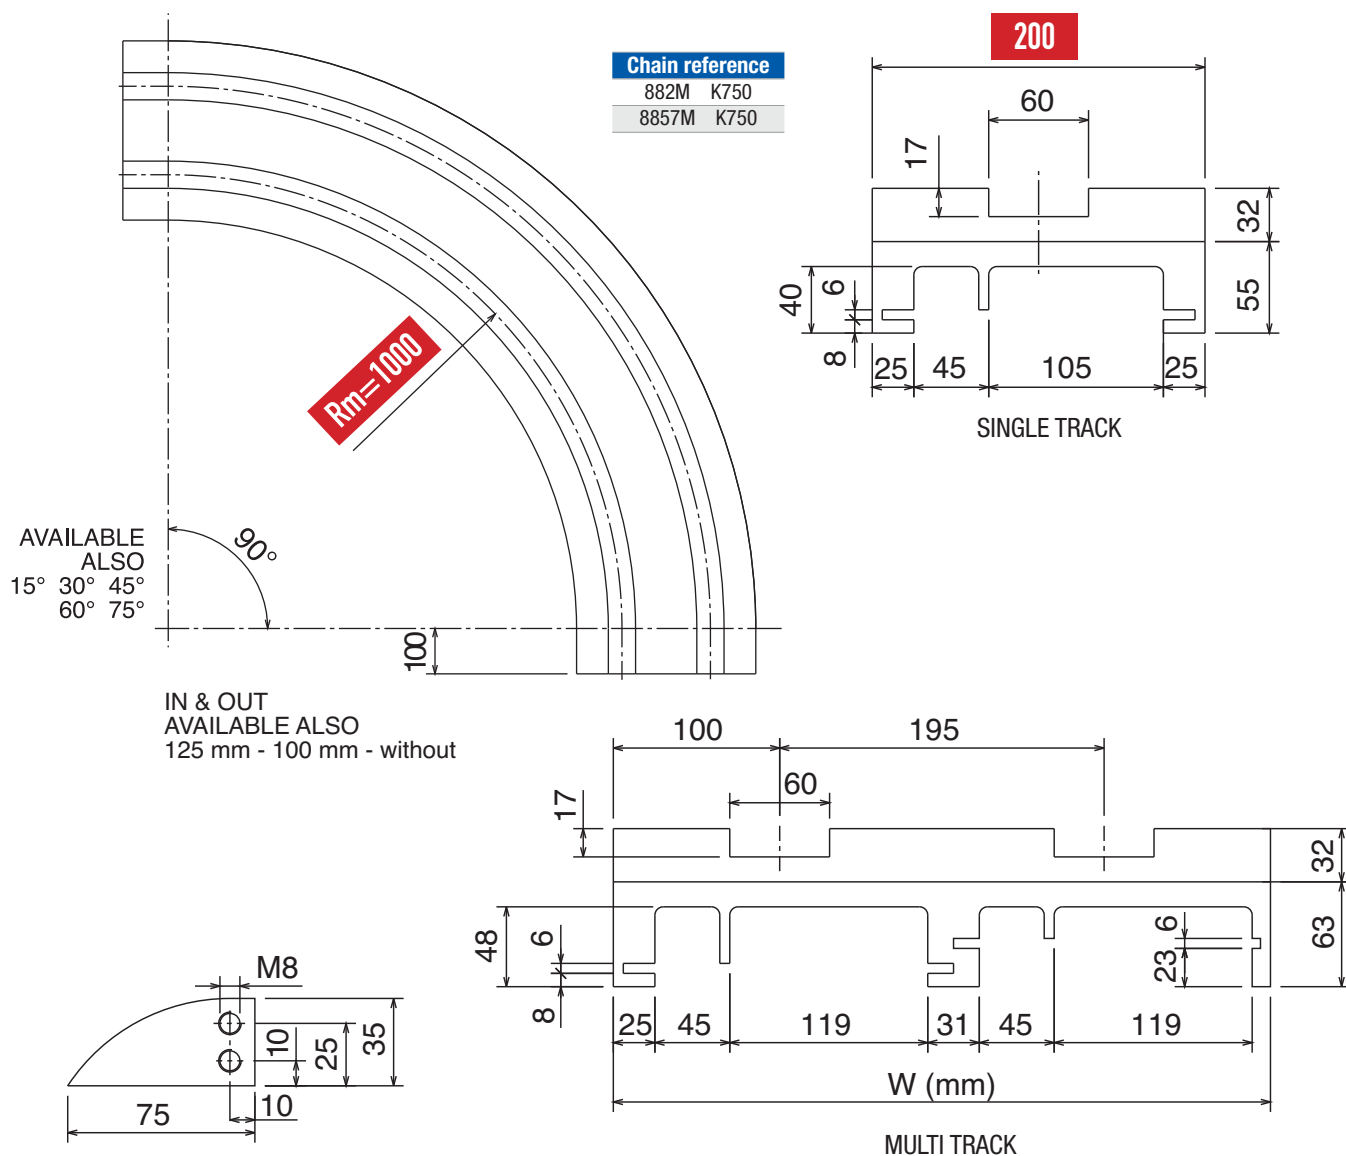

Upper part available, on request,
also in **BluLub** 
Movox Enhanced-Performance UHMW-PE
and for abrasive applications.


**RS**

MMM Magnetic System

Part	Article-Nr.	Tracks	W
719	71919614	1	200
719	71919624	2	395
719	71919634	3	590

Part	Article-Nr.	Tracks	W
719	71919614RS	1	200
719	71919624RS	2	395
719	71919634RS	3	590

Curva Larghezza Base = 270 mm / Curve Basic Width = 270 mm / Kurve Basisbreite = 270 mm

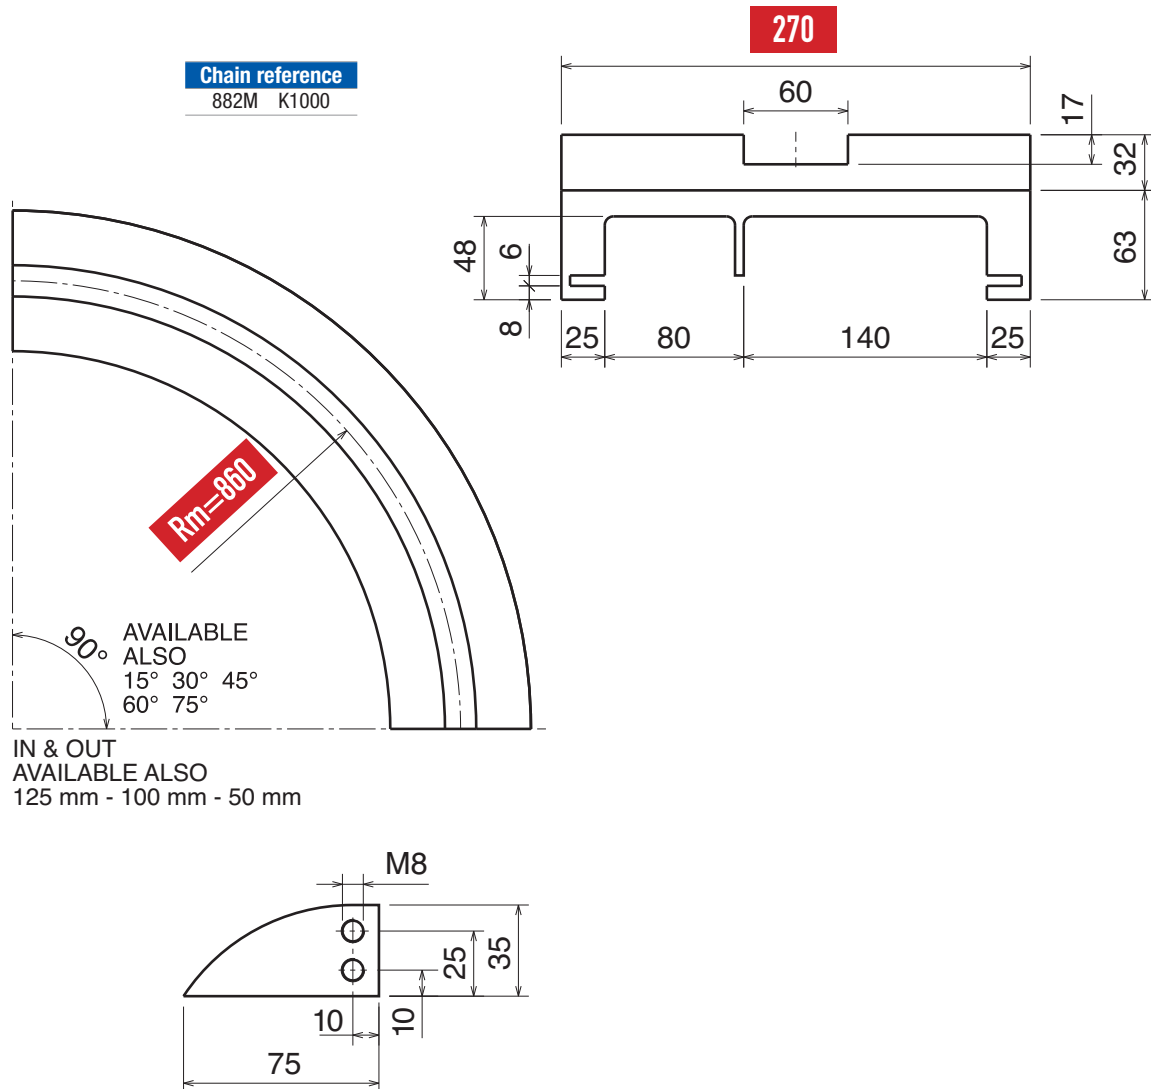

Magnetic System

Upper part available, on request,
also in **BluLub** 
Movex Enhanced-Performance UHMW-PE
and for abrasive applications.




Part	Article-Nr.	Tracks	W
709	70918610	1	270

Part	Article-Nr.	Tracks	W
709	70918610RS	1	270



Materiale:	Material:	Materialien:
Polietilene UHMW-PE	Polyethylene UHMW-PE	Polyäthylen UHMW-PE

Curva Larghezza Base = 320 mm / Curve Basic Width = 320 mm / Kurve Basisbreite = 320 mm

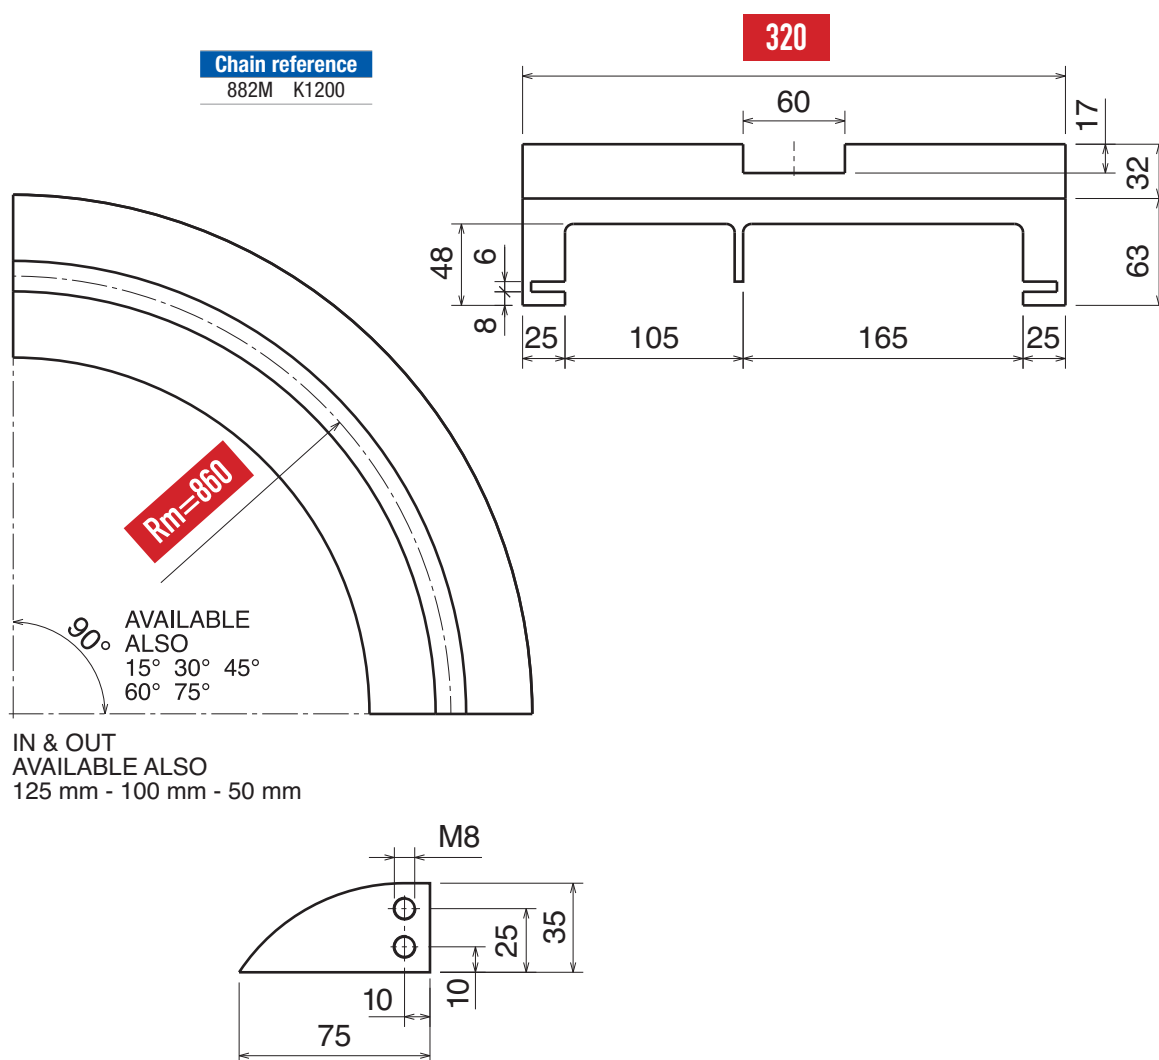


Magnetic System

Upper part available, on request,
also in **BluLub** 
Movex Enhanced-Performance UHMW-PE
and for abrasive applications.



Part	Article-Nr.	Tracks	W
710	71018610	1	320

Part	Article-Nr.	Tracks	W
710	71018610RS	1	320




RS 

Curva Larghezza Base = 214 mm / Curve Basic Width = 214 mm / Kurve Basisbreite = 214 mm

Chain reference

LBP 882M K750

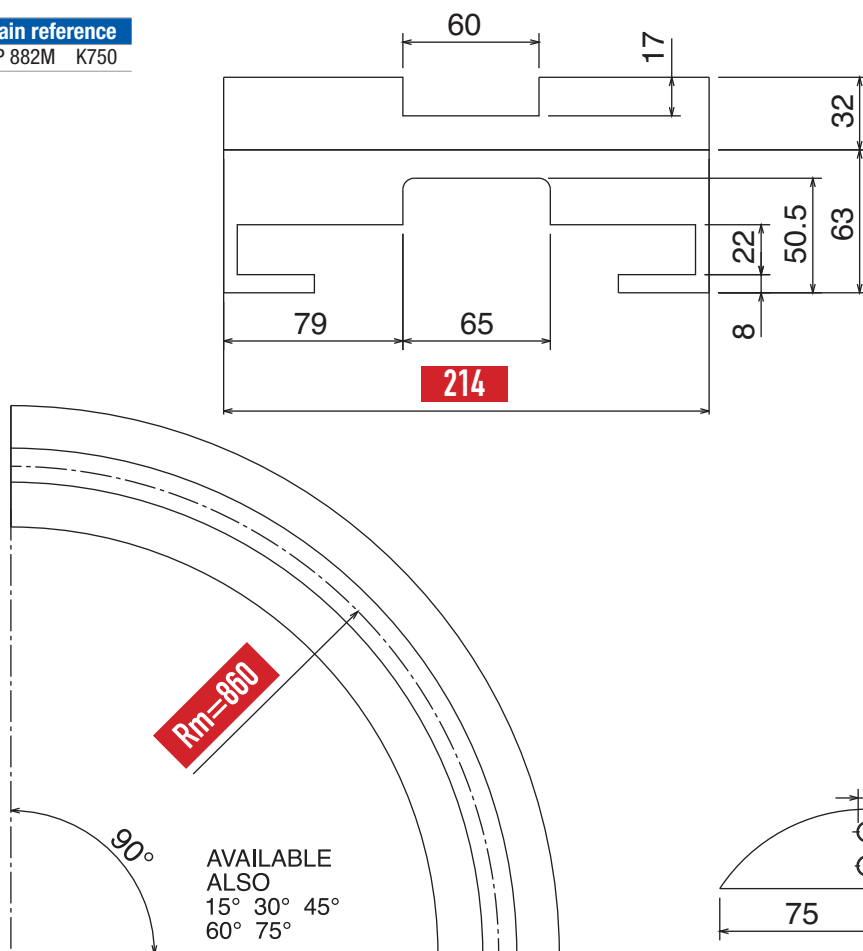

IN & OUT
AVAILABLE ALSO
125 mm - 100 mm - 50 mm

Magnetic System


Upper part available, on request,
also in **BluLub** Movex Enhanced-Performance UHMW-PE
and for abrasive applications.



standard codes
on table

add "B" for
BluLub Movex Enhanced-Performance UHMW-PE

add "C"
for abrasive
applications



RS


Part	Article-Nr.	Tracks	W
781	78118610	1	214

Part	Article-Nr.	Tracks	W
781	78118610RS	1	214


Curva Larghezza Base = 290 mm / Curve Basic Width = 290 mm / Kurve Basisbreite = 290 mm

Chain reference

LBP 882M K1000

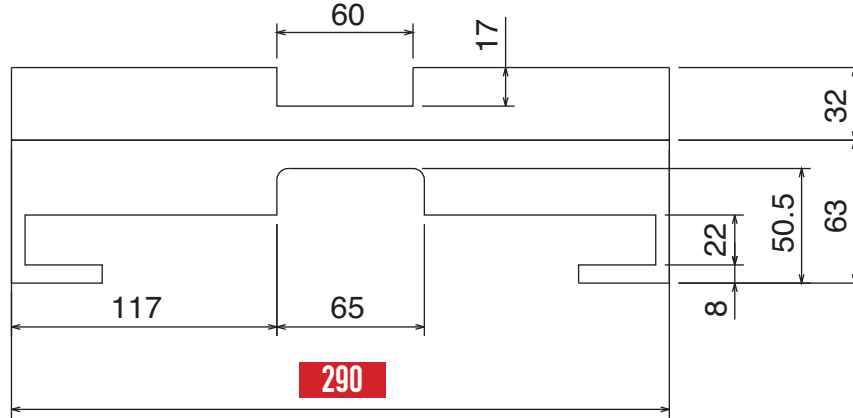

IN & OUT
AVAILABLE ALSO
125 mm - 100 mm - 50 mm


Magnetic System

Upper part available, on request,
also in **BluLub** 
Movex Enhanced-Performance UHMW-PE
and for abrasive applications.




standard codes
on table

add "B" for
BluLub 
Movex Enhanced-Performance UHMW-PE

add "C"
for abrasive
applications



Part	Article-Nr.	Tracks	W
782	78218610	1	290

Part	Article-Nr.	Tracks	W
782	78218610RS	1	290




RS 

Curva Larghezza Base = 340 mm / Curve Basic Width = 340 mm / Kurve Basisbreite = 340 mm

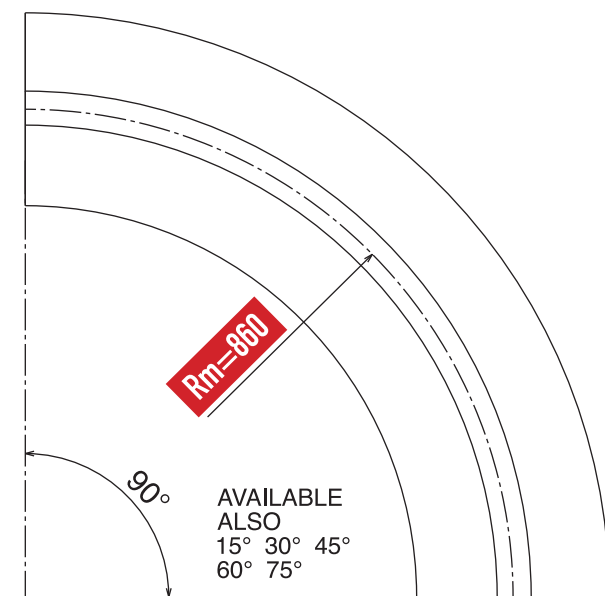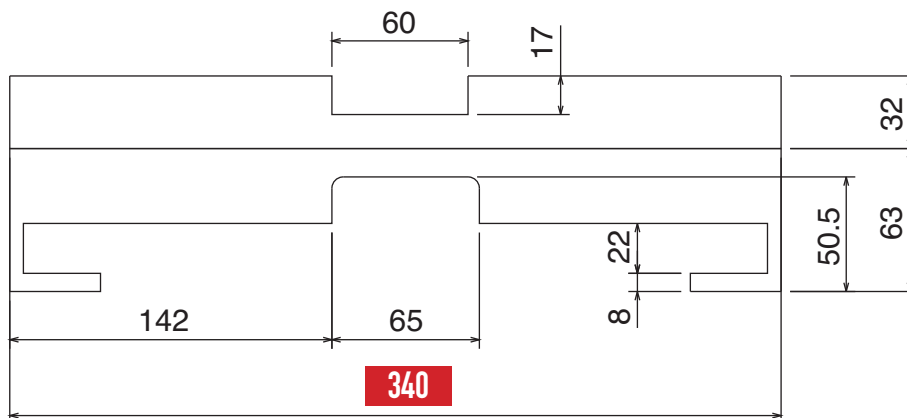

IN & OUT
AVAILABLE ALSO
125 mm - 100 mm - 50 mm

Chain reference
LBP 882M K1200



Magnetic System

Upper part available, on request,
also in **BluLub** Movex Enhanced-Performance UHMW-PE
and for abrasive applications.



standard codes
on table

add "B" for
BluLub Movex Enhanced-Performance UHMW-PE

add "C"
for abrasive
applications


Part	Article-Nr.	Tracks	W
783	78318610	1	340

Part	Article-Nr.	Tracks	W
783	78318610RS	1	340




RS

Curva Larghezza Base = 100 mm; Passo = 85 mm / Curve Basic Width = 100 mm; Pitch = 85 mm / Kurve Basisbreite = 100 mm; Teilung = 85 mm

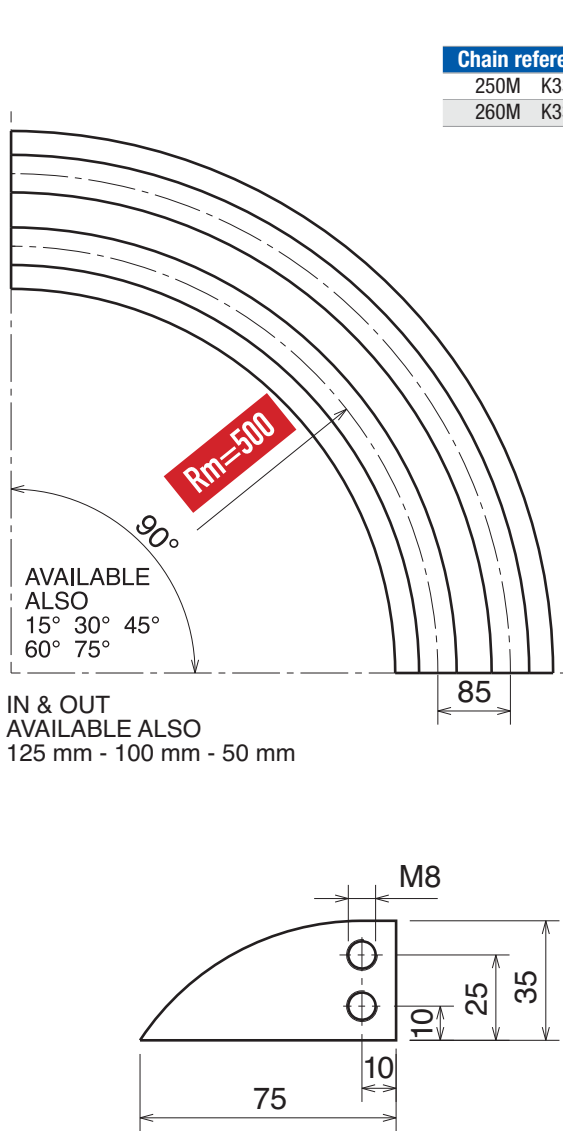

Chain reference	
250M	K330
260M	K330

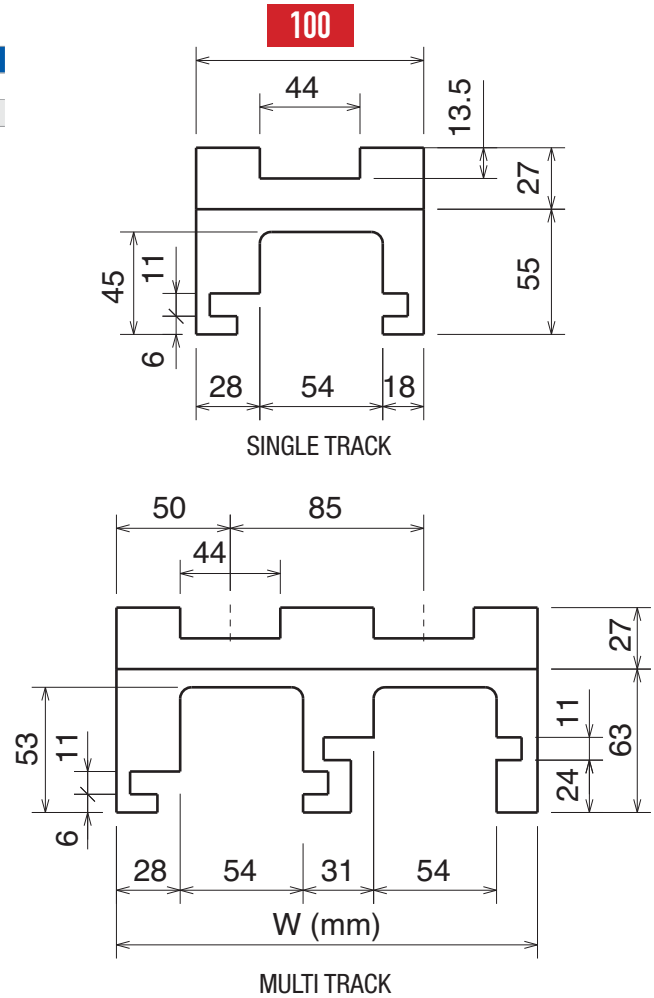

Magnetic System

Upper part available, on request, also in **BluLub**  and for abrasive applications.





RS 



Part	Article-Nr.	Tracks	W
705	70511610	1	100
705	70511620	2	185
705	70511630	3	270
705	70511640	4	355
705	70511650	5	440
705	70511660	6	525
705	70511670	7	610
705	70511680	8	695

Part	Article-Nr.	Tracks	W
705	70511610RS	1	100
705	70511620RS	2	185
705	70511630RS	3	270
705	70511640RS	4	355
705	70511650RS	5	440
705	70511660RS	6	525
705	70511670RS	7	610
705	70511680RS	8	695

Curva Larghezza Base = 100 mm; Passo = 85 mm / Curve Basic Width = 100 mm; Pitch = 85 mm / Kurve Basisbreite = 100 mm; Teilung = 85 mm

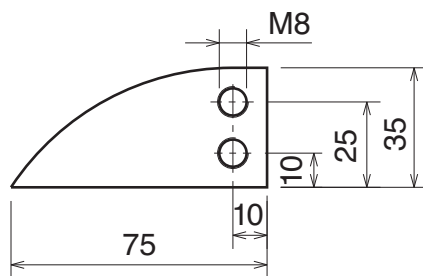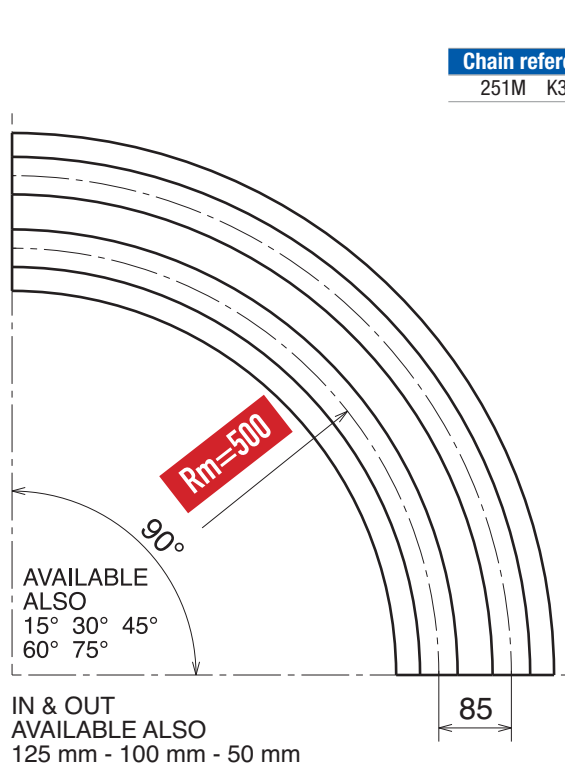

Upper part available, on request,
also in **BluLub** 
Movex Enhanced-Performance UHMW-PE
and for abrasive applications.

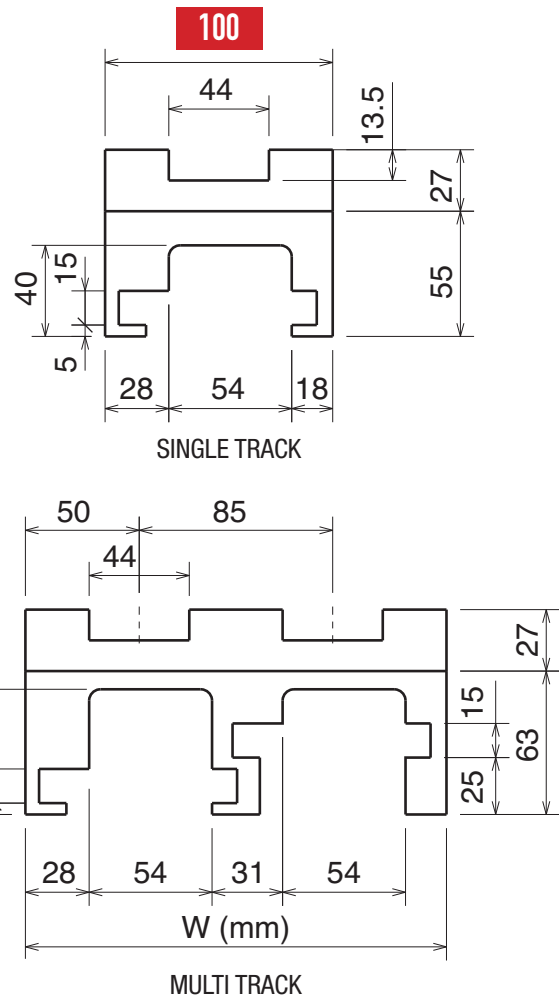


Magnetic System

Part	Article-Nr.	Tracks	W
706	70611610	1	100
706	70611620	2	185
706	70611630	3	270
706	70611640	4	355
706	70611650	5	440
706	70611660	6	525
706	70611670	7	610
706	70611680	8	695

Part	Article-Nr.	Tracks	W
706	70611610RS	1	100
706	70611620RS	2	185
706	70611630RS	3	270
706	70611640RS	4	355
706	70611650RS	5	440
706	70611660RS	6	525
706	70611670RS	7	610
706	70611680RS	8	695

Curva 880-881 TAB K325-K450-K750 / Curve 880-881 TAB K325-K450-K750 / Kurve 880-881 TAB K325-K450-K750

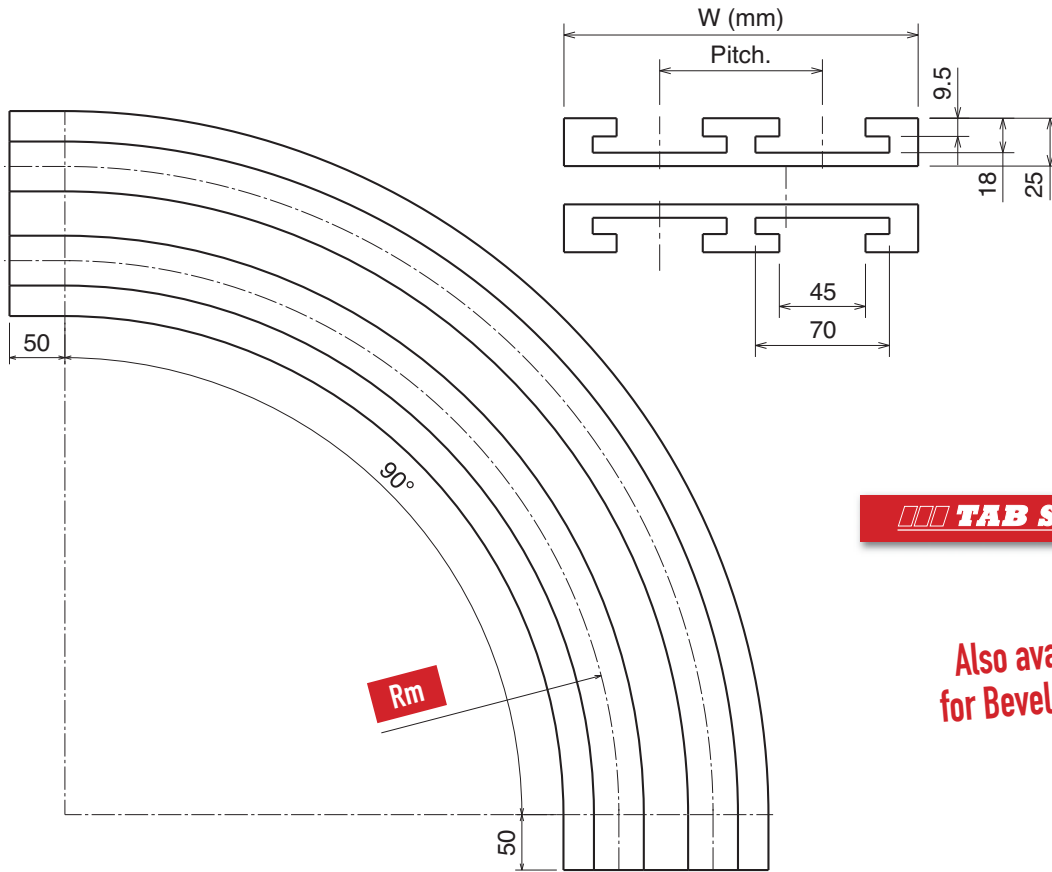

TAB System

Also available
for Bevel system


Upper part available, on request,
also in **BluLub** 
Movex Enhanced-Performance UHMW-PE
and for abrasive applications.



standard codes
on table

add "B" for
BluLub 
Movex Enhanced-Performance UHMW-PE


add "C"
for abrasive
applications



add "RS" for
RS 

Part	Article-Nr.	Tracks	W	Rm	Pitch
K325					
720	72021612	1	100	500	85
720	72021622	2	185		
720	72021632	3	270		
720	72021642	4	355		
720	72021652	5	440		
720	72021662	6	525		
K450					
721	72123612	1	130	610	120
721	72123622	2	250		
721	72123632	3	370		
721	72123642	4	490		
721	72123652	5	610		
721	72123662	6	720		
K750					
722	72223612	1	200	610	195
722	72223622	2	395		
722	72223632	3	590		
722	72223642	4	785		

Curva 882 TAB K750-K1000-K1200 / Curve 882 TAB K750-K1000-K1200 / Kurve 882 TAB K750-K1000-K1200

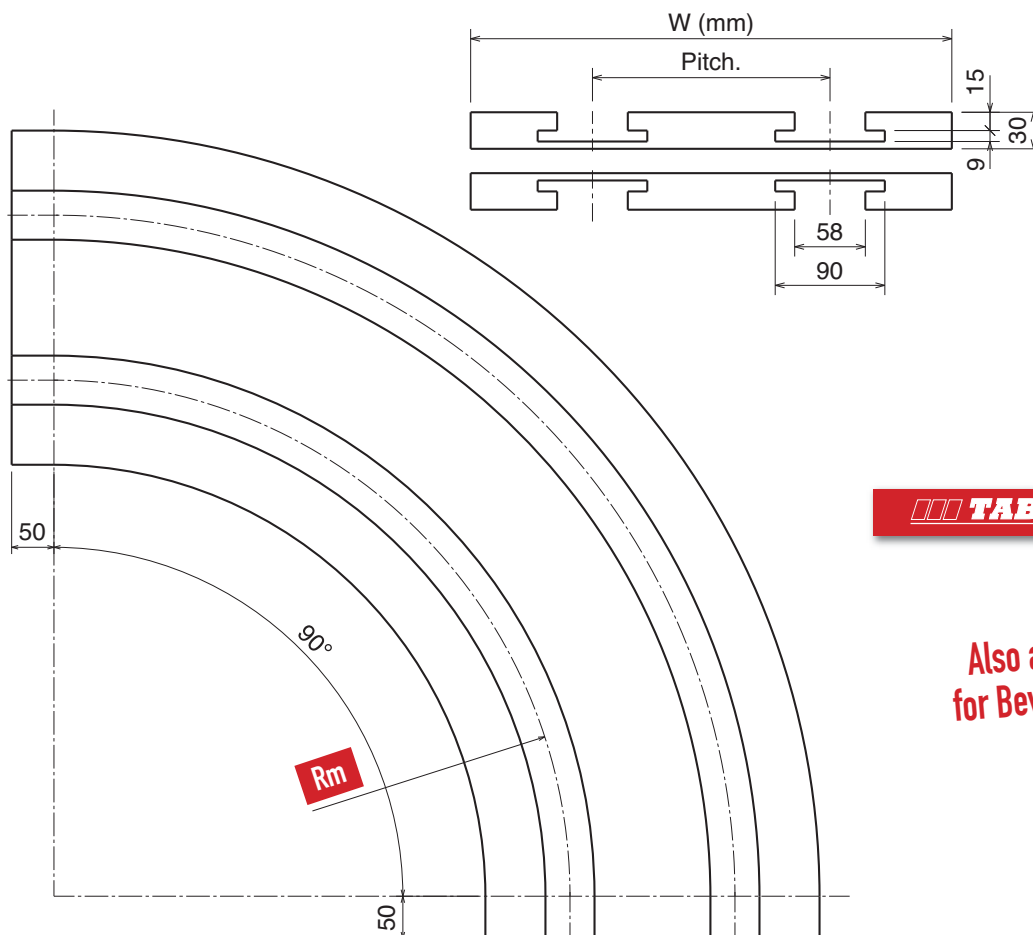

TAB System

Also available
for Bevel system

Upper part available, on request,
also in **BluLub** 
Movex Enhanced-Performance UHMW-PE
and for abrasive applications.



Part	Article-Nr.	Tracks	W	Rm	Pitch
K750					
723	72323612	1	200	610	195
723	72323622	2	395		
723	72323632	3	590		
723	72323642	4	785		
K1000					
724	72423612	1	270	610	230
724	72423622	2	530		
724	72423632	3	790		
724	72423642	4	1050		
K1200					
725	72523612	1	320	610	310
725	72523622	2	630		
725	72523632	3	940		
725	72523642	4	1250		